


CLI Reference Guide

FortiNDR 7.0.0

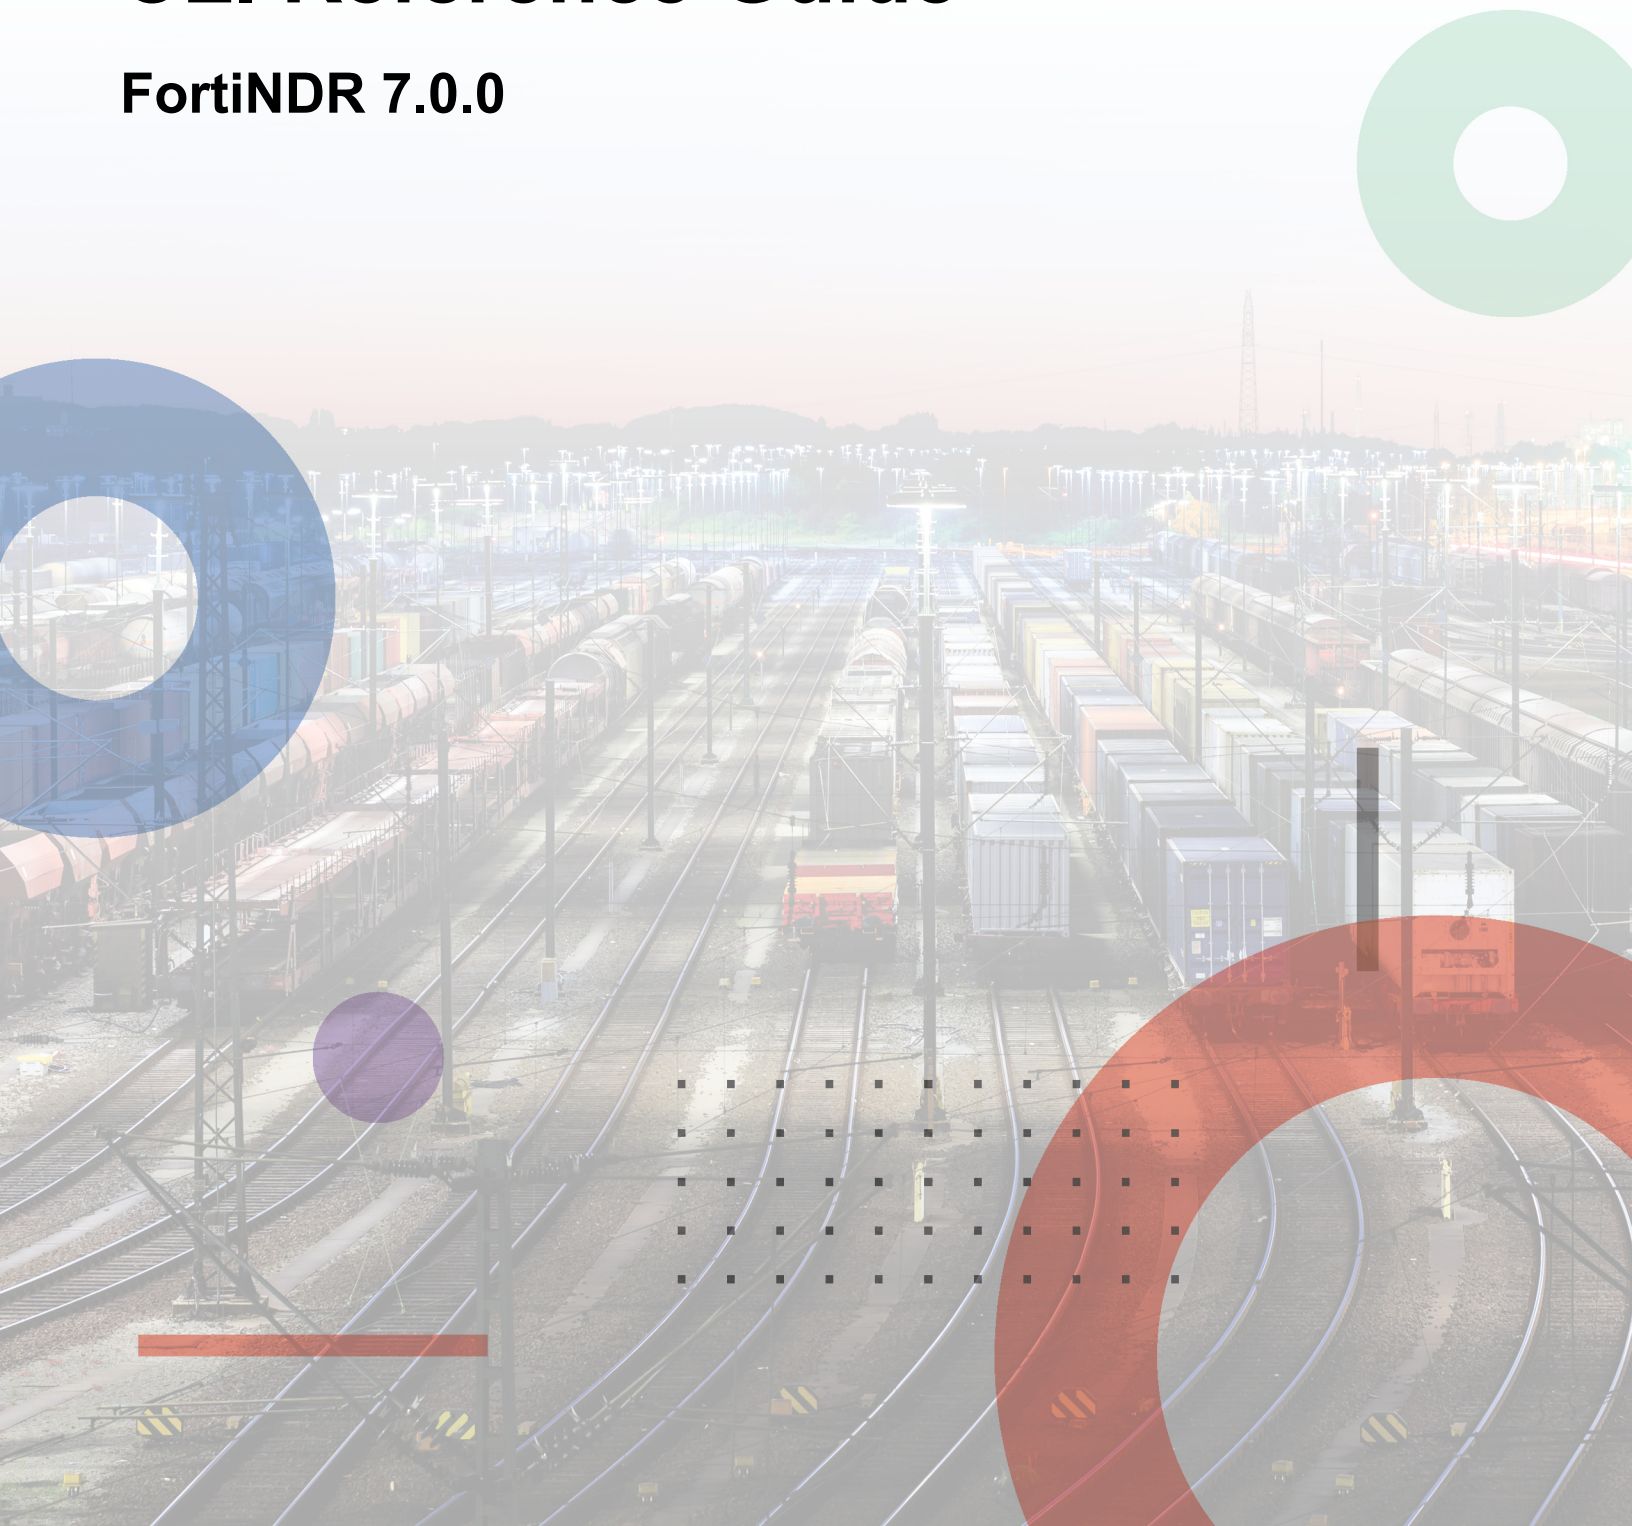

FORTINET DOCUMENT LIBRARY

<https://docs.fortinet.com>

FORTINET VIDEO GUIDE

<https://video.fortinet.com>

FORTINET BLOG

<https://blog.fortinet.com>

CUSTOMER SERVICE & SUPPORT

<https://support.fortinet.com>

FORTINET TRAINING & CERTIFICATION PROGRAM

<https://www.fortinet.com/training-certification>

NSE INSTITUTE

<https://training.fortinet.com>

FORTIGUARD CENTER

<https://www.fortiguard.com>

END USER LICENSE AGREEMENT

<https://www.fortinet.com/doc/legal/EULA.pdf>

FEEDBACK

Email: techdoc@fortinet.com



July 29, 2022

FortiNDR 7.0.0 CLI Reference Guide

55-700-761676-20220729

TABLE OF CONTENTS

Change Log	6
Introduction	7
Configuration commands	8
config profile ldap	8
config profile authentication radius	11
config system accprofile	12
config system admin	13
config system appearance	14
config system automation-settings	15
config system certificate ca	16
config system fortigate settings	17
config system fortiguard update	17
config system syslog fortianalyzer settings	18
config system ha	18
config system syslog1 settings	20
config system certificate crt	21
config system certificate local	21
config system certificate remote	22
config system csf	22
config system dhcp server	23
config system dns	24
config system enforcement-profile	25
config system interface	25
config system route	27
config system time manual	27
config system time ntp	28
config system ICAP server	28
config system global	29
config system syslog fortianalyzer settings	29
config system syslog1 settings	30
config system syslog2 settings	31
config log alertemail server	31
Get commands	33
get profile ldap	33
get profile authentication radius	33
get system accprofile	33
get system admin	33
get system admin-list	34
get system appearance	35
get system automation-settings	35
get system dhcp server	35
get system dns	35
get system enforcement-settings	36
get system interface	36
get system performance	37

get system raid-status	37
get system raid-status-detail	37
get system route	37
get system status	38
get system time manual	38
get system time ntp	39
Show and show full-configuration commands	40
Diagnose commands	41
diagnose debug	41
diagnose hardware	42
diagnose kdb	43
diagnose sniffer dump	43
diagnose sniffer file	43
diagnose sniffer packet	43
diagnose session list	44
diagnose system csf global	45
diagnose system csf upstream	45
diagnose system disk info	46
diagnose system disk summary	47
diagnose system disk health	47
diagnose system disk attributes	48
diagnose system disk-details	50
diagnose system ntp-status	50
diagnose system top	51
diagnose system vm	52
diagnose system db	53
Execute commands	54
execute date	54
execute demo	54
execute expandspooldisk	54
execute export file-report	54
execute export detected-files	55
execute api-key	55
execute db restore	55
execute db sample_process_summary	55
execute factoryreset config	56
execute factoryreset disk	56
execute factoryreset	57
execute formatdatadisk	57
execute formatlogdisk	57
execute learner	58
execute ha test-failover	58
execute partitiondisk	58
execute ping	59
execute raidlevel	60
execute reboot	60
execute reload	60
execute restore config	61

execute restore image	62
execute restore kdb	63
execute shutdown	63
execute ssh	64
execute telnettest	64
execute traceroute	65
execute update	66
execute vm license	66
execute snifferd	66
execute ndrd	66
execute file-size-threshold	67
execute cleanup	67
execute backup config	67
execute device	67

Change Log

Date	Change Description
2022-04-21	Initial release.
2022-05-17	Updated Execute commands on page 54 .
2022-05-17	Updated Configuration commands on page 8 and Execute commands on page 54 .

Introduction

You can access the FortiNDR CLI (Command Line Interface) using the FortiNDR console or using an SSH or TELNET client. These services must be enabled on the port1 interface.

CLI commands are intended to be used for initial device configuration and troubleshooting. Some commands are specific to hardware or VM devices. Use ? with the command for information on how to use the command.

The FortiNDR CLI is case-sensitive.

Configuration commands

config profile ldap

Use this command to configure LDAP profiles which can query LDAP servers for authentication.



Before using an LDAP profile, verify each LDAP query and connectivity with your LDAP server.

Each LDAP profile contains queries that retrieve configuration data from an LDAP server, such as user groups.

Syntax

```
config profile ldap
  edit <profile_name>
    set auth-bind-dn {cnid | none | searchuser | upn}
    set authstate {enable | disable}
    set base-dn <basedn_str>
    set bind-dn <binddn_str>
    set bind-password <bindpw_str>
    set cache-state {enable | disable}
    set cache-ttl <ttl_int>
    set cnid-name <cnid_str>
    set dereferencing {never | always | search | find}
    set fallback-port <port_int>
    set fallback-server {<fqdn_str> | <server_ipv4>}
    set port <port_int>
    set query <query_str>
    set scope {base | one | sub}
    set secure {none | ssl}
    set server <name_str>
    set timeout <timeout_int>
    set unauth-bind {enable | disable}
    set upn-suffix <upns_str>
    set version {ver2 | ver3}
  end
```

Variable	Description	Default
<profile_name>	Name of the LDAP profile.	
auth-bind-dn {cnid none searchuser upn}	none: Do not define a user authentication query. cnid: Name of the user objects' common name attribute, such as cn or uid. searchuser: Form the user's bind DN (distinguished name) by using the DN retrieved for that user.	searchuser

Variable	Description	Default
	<p><code>upn</code>: Form the user's bind DN by prepending the user name portion of the email address (<code>\$u</code>) to the user principal name (UPN such as <code>example.com</code>). By default, FortiAI uses the mail domain as the UPN. To use a UPN other than the mail domain, also configure <code>upn-suffix <upns_str></code>.</p>	
<code>authstate {enable disable}</code>	Enable to perform user authentication queries.	disable
<code>base-dn <basedn_str></code>	<p>The DN of the part of the LDAP directory tree where FortiAI searches for user objects, such as <code>ou=People,dc=example,dc=com</code>.</p> <p>User objects must be child nodes of this location.</p>	
<code>bind-dn <binddn_str></code>	<p>The bind DN of an LDAP user account with permissions to query the <code>basedn</code>, such as <code>cn=FortiAI,dc=example,dc=com</code>.</p> <p>This command is optional if your LDAP server does not require FortiAI to authenticate when performing queries and you have enabled <code>unauth-bind</code>.</p>	
<code>bind-password <bindpw_str></code>	The password of <code>bind-dn</code> .	
<code>cache-state {enable disable}</code>	<p>Enable to cache LDAP query results.</p> <p>Caching LDAP queries can reduce LDAP network traffic when there are frequent queries for information that does not change. However, caching might cause a delay from the time you update LDAP directory information and when FortiAI begins using that new information.</p> <p>If you enable this option but queries are not cached, check the TTL value. A TTL value of 0 effectively disables caching.</p>	disable
<code>cache-ttl <ttl_int></code>	<p>The amount of time, in minutes, that FortiAI caches query results. After the time has elapsed, cached results expire and subsequent requests for that information requires FortiAI to query the LDAP server and refresh the cache.</p> <p>The default TTL value is 1440 minutes (one day). The maximum is 10080 minutes (one week). A value of 0 effectively disables caching.</p>	1440
<code>cnid-name <cnid_str></code>	Name of the user objects' common name attribute, such as <code>cn</code> or <code>uid</code> .	
<code>dereferencing {never always search find}</code>	<p>Method of de-referencing attributes whose values are references.</p> <p><code>never</code>: Do not de-reference.</p> <p><code>always</code>: Always de-reference.</p>	never

Variable	Description	Default
	<p>search: De-reference only when searching.</p> <p>find: De-reference only when finding the base search object.</p>	
fallback-port <port_int>	<p>If you have configured a backup LDAP server that listens on a nonstandard port, enter the TCP port number.</p> <p>The standard port for LDAP is 389. The standard port for SSL-secured LDAP is 636.</p> <p>If secure is set to ssl, FortiNDR uses SSL-secured LDAP to connect to the server.</p>	389
fallback-server {<fqdn_str> <server_ipv4>}	<p>The FQDN or IP address of the backup LDAP server.</p> <p>If there is no fallback server, enter an empty string (").</p>	
port <port_int>	<p>If you have configured a backup LDAP server that listens on a nonstandard port, enter the TCP port number.</p> <p>The standard port for LDAP is 389. The standard port for SSL-secured LDAP is 636.</p>	389
query <query_str>	<p>An LDAP query filter, enclosed in single quotes ('), that selects a set of user objects from the LDAP directory.</p> <p>The query filter string filters the result set based on attributes common to all user objects and excludes non-user objects. For example, if user objects in your directory have two characteristics, the objectClass and mail attributes, use the query filter:</p> <p>(& (objectClass=inetOrgPerson) (mail=\$m))</p> <p>where \$m is the FortiAI variable for a user's email address.</p> <p>This command applies to user defined schema only.</p> <p>For details on query syntax, see any standard LDAP query filter reference manual.</p>	(& (objectClass=inetOrgPerson) (mail=\$m))
scope {base one sub}	<p>The level of depth to query:</p> <p>base: Query the basedn level.</p> <p>one: Query only one level below the basedn in the LDAP directory tree.</p> <p>sub: Query recursively all levels below the basedn in the LDAP directory tree.</p>	sub
secure {none ssl}	<p>Whether to connect to LDAP servers using an encrypted connection:</p> <p>none: Use a non-secure connection.</p> <p>ssl: Use an SSL-secured (LDAPS) connection.</p>	none
server <name_str>	The FQDN or IP address of the LDAP server.	

Variable	Description	Default
timeout <timeout_int>	The maximum length of time in seconds that FortiAI waits for query responses from the LDAP server.	10
unauth-bind {enable disable}	Enable to perform queries in this profile without supplying a bind DN and password for the directory search. Many LDAP servers require LDAP queries to be authenticated using a bind DN and password. If your LDAP server does not require FortiAI to authenticate before performing queries, you might enable this option. If this option is disabled, you must configure <code>bind-dn</code> and <code>bind-password</code> .	disable
upn-suffix <upns_str>	If you want to use a UPN other than the mail domain, enter that UPN. This is useful if users authenticate with a domain other than the mail server's principal domain name.	
version {ver2 ver3}	The protocol version used to communicate with the LDAP server.	ver3

config profile authentication radius

Use this command to configure FortiAI to connect to an external RADIUS server to authenticate FortiAI Users.

Syntax

```
config profile authentication radius
  edit <profile_name>
    set auth-prot {auto | chap | mschap | mschap2 | pap}
    set nas-ip <ip_addr>
    set port <port_int>
    set secret <password_str>
    set send-domain {enable | disable}
    set server {<fqdn_str> | <host_ipv4>}
  end
```

Variable	Description	Default
server {<fqdn_str> <host_ipv4>}	The IP address or FQDN of the POP3 server.	
auth-prot {auto chap mschap mschap2 pap}	The authentication method for the RADIUS server.	auto
nas-ip <ip_addr>	The NAS IP address and the Called Station ID. If you do not enter an IP address, FortiNDR uses the IP address that the FortiAI interface uses to communicate with the RADIUS server. For information about RADIUS attribute 31, see Microsoft Vendor-specific RADIUS Attributes .	0.0.0.0

Variable	Description	Default
port <port_int>	If the RADIUS server listens on a nonstandard port number, enter the port number of the RADIUS server. The standard port number for RADIUS is 1812.	1812
secret <password_str>	The password of the RADIUS server.	
send-domain {enable disable}	Enable if the RADIUS server requires both the user name and the domain when authenticating.	
server {<fqdn_str> <host_ipv4>}	The IP address or FQDN of the RADIUS server.	

config system accprofile

Use this command to configure access profiles. This command governs which areas of the web-based manager and CLI that administrators can access and whether they have permission to change the configuration or other items in each area.



Everyone is treated as an administrator. Set up non-administrators with a custom non-administrator `accprofile`.

The GUI *Admin Profiles* is the `accprofile`. Only the default *SuperAdminProfile* can modify *Admin Profiles* and `accprofile`. Only administrators with the default *SuperAdminProfile* can reboot or shut down the system.

Syntax

```
config system accprofile
  edit <profile_name>
    set system-access {none | read | read-write}
    set system-config {none | read | read-write}
    set system-maintenance {none | read | read-write}
    set system-status {none | read | read-write}
  end
```

Variable	Description	Default
<profile_name>	Name of the access profile.	
system-access {none read read-write}	Specify the account permission associated with this access profile. The <code>read-write</code> permission gives access to settings critical to FortiNDR network accessibility, including GUI console, network, administrator, admin profiles, certificates, and RADIUS/LDAP authentication.	none

Variable	Description	Default
<code>system-config {none read read-write}</code>	Specify the account permission associated with this access profile. The <code>read-write</code> permission gives access to modify other system settings such as system time settings, system FortiGuard update, and Security Fabric settings.	<code>none</code>
<code>system-maintenance {none read read-write}</code>	Specify the account permission associated with this access profile. The <code>read-write</code> permission gives access to system maintenance settings such as back up system configuration, restore configuration, and restore firmware.	<code>none</code>
<code>system-status {none read read-write}</code>	Specify the account permission associated with this access profile. The <code>read-write</code> permission gives access to the system to check its status. Users with this permission set to <code>none</code> cannot log into the system. The default is <code>none</code> in the GUI.	<code>none</code>

config system admin

Use this command to configure FortiAI administrator accounts.

By default, FortiAI units have a single administrator account named `admin`. For more granular control over administrative access, you can create additional administrator accounts with more restricted permissions such as being able to configure a specific domain.

Syntax

```
config system admin
  edit <name_str>
    set access-profile <profile_name>
    set auth-strategy {local | local-plus-radius | ldap | radius}
    set name <name>
    set password <password_str>
    set radius-permission-check {enable | disable}
    set radius-subtype-id <subtype_int>]
    set radius-vendor-id <vendor_int>
    set sshkey <key_str>
    set status {enable | disable}
    set theme {Neutrino| Jade | Mariner | Graphite | Melongene | Onyx | Dark_Matter |
Eclipse | Cloud_App_Light | Cloud_App_Dark}
    set trust-hosts <host_ipv4mask>
  end
```

Variable	Description	Default
<code><name_str></code>	Name of the administrator account.	
<code>access-profile</code> <code><profile_name></code>	Name of an access profile that determines which functional areas the administrator account may view or affect.	

Variable	Description	Default
<code>auth-strategy {local local-plus-radius ldap radius}</code>	Select the local or remote type of authentication that the administrator can use.	local
<code>name <name></code>	Name of user.	english
<code>password <password_str></code>	If <code>auth-strategy</code> is local or local-plus-radius, enter the password for the administrator account. Do not use an administrator password shorter than six characters. For better security, use a longer password with a complex combination of characters and numbers. Change the password regularly. A weak password might compromise the security of your FortiAI unit.	
<code>radius-permission-check {enable disable}</code>	If <code>auth-strategy</code> is local or local-plus-radius, enable this option to query the RADIUS server for the permissions attribute.	disable
<code>radius-subtype-id <subtype_int>]</code>	If <code>auth-strategy</code> is local or local-plus-radius, and <code>radius-permission-check</code> is enabled, enter the RADIUS subtype identifier.	0
<code>radius-vendor-id <vendor_int></code>	If <code>auth-strategy</code> is local or local-plus-radius, and <code>radius-permission-check</code> is enabled, enter the RADIUS vendor identifier.	0
<code>sshkey <key_str></code>	Enter the SSH key string inside single straight quote marks (''). When connecting from an SSH client that presents this key, administrators do not need to enter the account name and password to log in to the CLI.	
<code>status</code>	Enable or disable admin users.	
<code>theme {Neutrino Jade Mariner Graphite Melongene Onyx Dark_Matter Eclipse Cloud_App_Light Cloud_App_Dark}</code>	Theme of the GUI for this admin.	Neutrino
<code>trust-hosts <host_ip v4 mask></code>	Enter one to three IP addresses and netmasks from which the administrator can log into FortiAI. Separate each pair of IP address and netmask with a comma (.). To allow the administrator to authenticate from any IP address, enter 0.0.0.0/0.0.0.0.	0.0.0.0/0.0.0.0

config system appearance

Use this command to customize the appearance of the login page.

Syntax

```
config system appearance
    set login-page-theme {Neutrino| Jade | Mariner | Graphite | Melongene | Onyx | Dark_
Matter | Eclipse | Cloud_App_Light | Cloud_App_Dark}
end
```

Variable	Description	Default
login-page-theme {Neutrino Jade Mariner Graphite Melongene Onyx Dark_Matter Eclipse Cloud_App_Light Cloud_App_Dark}	The theme of the setting page for this user.	Neutrino

config system automation-settings

Syntax

Use this command to configure the automation profiles used by the FortiNDR enforcement feature.

```
config system automation-settings
    edit <name_str>
        set type {fgt-quarantine|fnac-quarantine|generic-webhook}
        set vdom <vdom_str>
        set api-key <apikey_str>
        set webhook-config <config_str>
        set ip <ip_addr>
        set port <port_int>
        set status {enable | disable}
        set source {fabric-device | sniffer}
        set profile <enforcement_profile_name>
    end
```

Variable	Description	Default
name <string>	Automation Profile name	
type {fgt-quarantine fnac-quarantine generic-webhook}	FortiNDR supports three types of automated quarantine : fgt-quarantine, fnac-quarantine, and generic-webhook	Fgt-quarantine
vdom <vdom_str>	The VDOM of the FortiGate. Only applicable to fgt-quarantine.	root
api-key <apikey_str>	API key of the device. Only applicable to fgt-quarantine and fnac-quarantine.	
webhook-config <config_str>	The webhook configuration to be used by FortiNDR enforcement.	

Variable	Description	Default
	<p>Only applicable to <code>fgt-quarantine</code> and <code>generic-webhook</code>.</p> <p>For <code>fgt-quarantine</code>:</p> <pre>{"webhook_exec" : "ip_blocker", "webhook_undo": "ip_unblocker"}</pre> <p>For <code>generic-webhook</code>:</p> <pre>{"webhook_exec" : {"url": "https://host1.com:443/api/ip_blocker", "method": "post", "http_body": {"srcip": "%srcip%", "headers": {"content-type": "application/json"}}, "webhook_undo": {"url": "https://host1.com:443/api/ip_unblocker", "method": "post", "http_body": {"srcip": "%srcip%", "headers": {"content-type": "application/json"}}}}</pre> <p>To enter the JSON data through CLI, the JSON string must be formatted as one line and enclosed in single quotes (').</p>	
<code>ip <ip_addr></code>	IP address of the device. Only applicable to <code>fgt-quarantine</code> and <code>fnac-quarantine</code> .	
<code>port <port_int></code>	Port number of the device. Only applicable for <code>fgt-quarantine</code> and <code>fnac-quarantine</code> .	443
<code>status {enable disable}</code>	Enable or disable the automation profile.	enable
<code>source {fabric-device sniffer}</code>	Set the source of detection that applies to the current profile. Only applicable for <code>fgt-quarantine</code> .	fabric-device
<code>profile <enforcement_profile_name></code>	The enforcement profile to be used by the current automation setting.	default

config system certificate ca

Use this command to import certificates for certificate authorities (CA).

Certificate authorities validate and sign other certificates to indicate to third parties that those certificates can be trusted.

CA certificates are required by connections that use transport layer security (TLS).

Syntax

```
config system certificate ca
    edit <name_str>
        set certificate <cert_str>
    end
```


Variable	Description	Default
<name_str>	The name of this certificate.	
certificate <cert_str>	Enter or paste the certificate in PEM format to import it.	

config system fortigate settings

Use this command to configure settings for FortiGate inline blocking. Since FortiOS 7.0.1, FortiGate can send files and get the verdict from FortiNDR directly via the HTTP/2 protocol after FortiNDR joins the Security Fabric.

Syntax

```
config system fortigate settings
    set timeout <timeout_int>
```

Variable	Description	Default
timeout <timeout_int>	The maximum waiting time of FortiNDR verdict fetching for FortiGate verdict request.	1

config system fortiguard update

Use this command to configure how FortiNDR will retrieve the most recent Fortiguard Neural Networks engine and database updates.

Syntax

```
config system fortiguard update
    set scheduled-update-day <day_int>
    set scheduled-update-frequency {daily | every | weekly}
    set scheduled-update-status {enable | disable}
    set scheduled-update-time <time_str>
end
```

Variable	Description	Default
scheduled-update-day <day_int>	Enter the day of the week at which FortiNDR will request updates where the range is from 0–6 and 0 means Sunday and 6 means Saturday.	0
scheduled-update-frequency {every daily weekly}	Enter the frequency at which FortiNDR will request updates. You also need to configure scheduled-update-day <day_int> and scheduled-update-time <time_str>.	every
scheduled-update-status {enable disable}	Enable to perform updates according to the configured schedule.	disable

Variable	Description	Default
scheduled-update-time <time_str>	Enter the time of the day at which FortiNDR will request updates, in the format hh:mm, where hh means update on every (1-23) hours, mm means starting on minutes (0-59), and 60 means random minutes.	01:60

config system syslog fortianalyzer settings

Use this command to configure FortiAnalyzer server settings for the syslog to be sent to this server. By default, port number is 514.

Syntax


```
config system syslog fortianalyzer settings
set ipaddr <ip_address>
set port <port>
set status {enable | disable}
```


Variable	Description	Default
ipaddr <ip_address>	IP address of FortiAnalyzer server.	
port <port>	Port number of FortiAnalyzer server used to receive syslog.	514
status {enable disable}	Enable the status to send syslog to a FortiAnalyzer server. Disable this option to not send any syslog.	

config system ha

Use this command to configure FortiNDR to act as a member of a High Availability (HA) cluster in order to increase availability.

```
config system ha
config interface
  edit <interface_name>
    set action-on-primary {ignore-vip | use-vip}
    set heartbeat-status {disable | primary | secondary}
    set peer-ip <ipv4mask>
    set port-monitor <enable | disable>
    set virtual-ip <ipv4mask>
  set hb-base-port <hb-port_int>
  set hb-lost-threshold <hb-threshold_int>
  set mode {off | primary | secondary}
  set password <password_str>
```

Variable	Description	Default
<interface_name>	Enter the interface name of which you want to apply HA configuration.	
action-on-primary {ignore-vip use-vip}	<p>Enable/disable virtual IP configured on this interface.</p> <ul style="list-style-type: none"> ignore-vip: Do not use the virtual ip configuration when HA mode is primary Use-vip: Add the specified virtual IP address and netmask to the network interface when HA mode is primary. This option results in the network interface having two IP addresses: the actual and the virtual. 	Ignore-vip
heartbeat-status {disable primary secondary}	<p>Specify if this interface will be used for HA heartbeat and synchronization.</p> <ul style="list-style-type: none"> Disable: Do not use this interface for HA heartbeat and synchronization. primary: Select the primary network interface for heartbeat and synchronization traffic. This network interface must be connected directly or through a switch to the Primary heartbeat network interface of other member in the HA group. secondary: Select the secondary network interface for heartbeat and synchronization traffic. The secondary heartbeat interface is the backup heartbeat link between the units in the HA group. If the primary heartbeat link is functioning, the secondary heartbeat link is only used for the HA heartbeat. Otherwise the secondary link is used for both the HA heartbeat and synchronization. <hr/> <div>  <p>In general, you should isolate the network interfaces that are used for heartbeat traffic from your overall network. Heartbeat and synchronization packets contain sensitive configuration information, are latency-sensitive, and can consume considerable network bandwidth.</p> </div> <hr/>	disable
peer-ip <ipv4mask>	<p>Enter the IP address of the matching heartbeat network interface of the other member of the HA group.</p> <p>If you are configuring the primary unit's primary heartbeat network interface, enter the IP address of the secondary unit's primary heartbeat network interface.</p> <p>For the secondary heartbeat network interface, enter the IP address of the other unit's secondary heartbeat network interface.</p>	0.0.0.0

Variable	Description	Default
port-monitor <enable disable>	Enable to monitor a network interface for failure. If the port fails, the primary unit will trigger a failover.	disable
virtual-ip <ipv4mask>	Enter the virtual IP address and netmask for this interface.	0.0.0.0/0
hb-base-port <hb-port_int>	Enter the first of four total TCP port numbers that will be used for: <ul style="list-style-type: none"> The heartbeat signal Synchronization control Data synchronization Configuration synchronization 	20000
hb-lost-threshold <hb-threshold_int>	Enter the total span of time, in seconds, for which the primary unit can be unresponsive before it triggers a failover and the secondary unit assumes the role of the primary unit. <div>  <p>If the failure detection time is too short, the secondary unit may falsely detect a failure during periods of high load.</p> </div>	30
mode {off primary secondary}	Enter the HA operating mode or disable HA	off
password <password_str>	Enter a password for the HA group. The password must be the same on the primary and secondary FortiAI unit(s). The password must be a least 1 character.	

config system syslog1 settings

Use this command to configure a remote server settings and the syslog is sent to this server. The default port number is 514.

Syntax

```
config system syslog1 settings
  Set ipaddr <ip_address>
  Set port <port>
  Set status {enable | disable}
```

Variable	Description	Default
ipaddr <ip_address>	IP address of a remote server.	
port <port>	Port number of remote server used to receive syslog.	514
status {enable disable}	Enable the status to send syslog to a remote server. Disable this option to not send any syslog.	

config system certificate crl

Use this command to import certificate revocation lists.

To ensure that FortiNDR validates only certificates that have not been revoked, periodically upload a current certificate revocation list from certificate authorities (CA) or use the online certificate status protocol (OCSP) to query the certificate status.

Syntax

```
config system certificate crl
  edit <name_str>
    set crl <cert_str>
  end
```

Variable	Description	Default
<name_str>	The name of this certificate revocation list.	
crl <cert_str>	Enter or paste the certificate in PEM format to import it.	

config system certificate local

Use this command to import signed certificates and certificate requests to install them for local use by FortiNDR.

FortiNDR requires a local server certificate that it can present when clients request secure connections.



When using this command to import a local certificate, you must follow the order of the commands described below. This is because `privatekey` needs the `password` to decrypt the private key and `certificate` needs a matched private key file.

Syntax

```
config system certificate local
  edit <name_str>
    set password
    set private-key
    set certificate <cert_str>
    set csr <csr_str>
    set comments <comment_str>
  end
```

Variable	Description	Default
<name_str>	The name of the certificate to be imported.	
password	The password of the certificate.	
private-key	The private key of the certificate.	

Variable	Description	Default
certificate <cert_str>	Enter or paste the certificate in PEM format to import it.	
csr <csr_str>	Enter or paste the certificate signing request in PEM format to import it.	
comments <comment_str>	Comments for this certificate.	

config system certificate remote

Use this command to import the certificates of the online certificate status protocol (OCSP) servers of your certificate authority (CA).

OCSP lets you revoke or validate certificates by query rather than by importing certificate revocation lists (CRL).

If you enable OCSP for PKI users, remote certificates are required.

Syntax

```
config system certificate remote
    edit <name_str>
        set certificate <cert_str>
    end
```

Variable	Description	Default
<name_str>	The name of the certificate to be imported.	
certificate <cert_str>	Enter or paste the certificate in PEM format to import it.	

config system csf

Use this command to configure FortiNDR as a Security Fabric member.

Syntax

```
config system csf
    set configuration-sync {local | sync}
    set managment-ip <ip_str>
    set managment-port <port_int>
    set status {enable | disable}
    set upstream-ip <ip_str>
    set upstream-port <port_int>
```

Variable	Description	Default
configuration-sync {local sync}	Configuration synchronization mode.	local

Variable	Description	Default
managment-ip <ip_str>	Management IP address of FortiNDR to join the Security Fabric.	
managment-port <port_int>	Management port number of the unit to join the Security Fabric. Set the value between 1-65535.	443
status {enable disable}	Enable or disable Security Fabric configuration.	disable
upstream-ip <ip_str>	IP address of upstream FortiGate.	
upstream-port <port_int>	Upstream FortiGate port number.	8013

config system dhcp server

Use this command to configure the DHCP server object.

Syntax

```
config system dhcp server
  edit <serverName>
    config exclude-range
      edit <id of IP address>
    config ip-range
      edit <id of IP address>
    config reserved-address
      edit <id of IP address>
    set auto-configuration {enable | disable}
    set conflicted-ip-timeout <int>
    set default-gateway <IP Address>
    set dns-service {default | specify}
    set domain <domain name>
    set enable {enable | disable}
    set htype {normal | other}
    set interface <interface name>
    set lease-time <lease time in seconds>
    set netmask <netmask_ip>
  end
```

Variable	Description	Default
edit <serverName>	The server name of this DHCP server.	
config exclude-range	DHCP excluded IP range.	
config ip-range	DHCP IP address range.	
config reserved-address	DHCP reserved IP address.	
auto-configuration {enable disable}	Enable or disable auto configuration.	enable
conflicted-ip-timeout <int>	IP address conflict timeout in seconds.	1800

Variable	Description	Default
default-gateway <IP Address>	Default gateway IP address.	192.168.2.99
dns-service {default specify}	DNS server options.	default
domain <domain name>	Domain name of the DHCP server.	
enable {enable disable}	Enable or disable this DHCP server.	enable
htype {normal other}	Device/port name.	
interface <interface name>	Interface name.	
lease-time <lease time in seconds>	Lease time in seconds.	604800
netmask <netmask_ip>	Netmask of this DHCP server.	255.255.255.0

config system dns

Use this command to configure the IP addresses of the primary and secondary DNS servers that FortiAI queries to resolve domain names into IP addresses.

Syntax

```
config system dns
    set cache {enable | disable}
    set cache-min-ttl <time_in_sec>
    set primary <dns_ipv4>
    set private_ip_query {enable | disable}
    set protected-domain-dns-servers <class_ip>
    set protected-domain-dns-state {enable | disable}
    set secondary <dns_ipv4>
    set truncate-handling {disable | tcp-retry}
end
```

Variable	Description	Default
cache {enable disable}	Enable to cache DNS query results to improve performance. If memory is low, disable to free up more memory.	enable
cache-min-ttl <time_in_sec>	Minimum TTL for cached DNS records in seconds.	
primary <dns_ipv4>	IP address of the primary DNS server.	0.0.0.0
private_ip_query {enable disable}	Enable to perform reverse DNS lookups on private network IP addresses, as defined in RFC 1918. The DNS server must have PTR records for your private network's IP addresses. Not having records for those IP addresses might increase DNS query time and cause query results to show <i>Host not found</i> .	disable

Variable	Description	Default
protected-domain-dns-servers <class_ip>	IP addresses of DNS servers for protected domains.	
protected-domain-dns-state {enable disable}	Enable or disable using DNS servers for protected domains.	
secondary <dns_ipv4>	IP address of the secondary DNS serve.	0.0.0.0
truncate-handling {disable tcp-retry}	Action for truncated UDP.	

config system enforcement-profile

Use this command to configure the FortiNDR enforcement profile. FortiNDR system will use this to filter out anomaly detection events for executing enforcement.

Syntax

```
config system enforcement-profile
  edit <name_str>
    set allowlist <ipv4mask>
    set risk-level <int>
    set conf-level <int>
    set severity <int>
    set category {malware,botnet,encrypted-attack,network-attack,ioc,week-cipher, machine-
learning}
  end
```

Variable	Description	Default
allowlist <allowlist_ ipv4mask>	The IP addresses and netmasks in the allowlist (white list) are excluded from enforcement consideration. Separate each pair of IP address and netmask with a comma (,).	
risk-level <risk_lvl_ int>	Malicious detected records with the entered risk level and above are considered when executing enforcement by FortiNDR. Valid values are 2 (medium risk), 3 (high risk), or 4 (critical risk).	4
conf-level <conf_lvl_ float>	Malicious detected records with the entered confidence level and above are considered when executing enforcement by FortiNDR. The valid range is 0.8 to 1.0.	0.8

config system interface

Use this command to configure allowed and denied administrative access protocols, up or down administrative status for the network interfaces of FortiNDR.

Syntax

```
config system interface
    edit <physical_interface_str>
        set allowaccess {ping https ssh telnet}
        set discover {enable | disable}
        set ip <ipv4mask>
        set mode {static | dhcp}
        set speed {auto | 10full | 10half | 100full | 100half | 1000full}
        set status {down | up}
    end
```

Variable	Description	Default
<physical_interface_str>	Name of the physical network interface, such as port1.	
allowaccess {ping https ssh telnet}	Add one or more protocols to the list of protocols that allow administrative access to FortiNDR through this network interface: ping: Allow ICMP ping responses from this network interface. https: Allow secure HTTP (HTTPS) access to the web-based manager and per-recipient quarantines. ssh: Allow SSH access to the CLI. telnet: Allow Telnet access to the CLI. HTTP and Telnet connections are not secure and can be intercepted by a third party. To reduce risk, enable this option only on network interfaces connected directly to your management computer.	Varies by network interface.
discover {enable disable}	Allow discovery of the interface on this port.	
ip <ipv4mask>	IP address and netmask of the network interface.	
mode {static dhcp}	Interface mode.	static
speed {auto 10full 10half 100full 100half 1000full}	Speed of the network interface. Some network interfaces might not support all speeds.	auto
status {down up}	up enables the network interface to send and receive traffic. down disables the network interface.	up

config system route

Use this command to configure static routes.

Syntax

```
config system route
  edit <route_int>
    set destination <destination_ipv4mask>
    set gateway <gateway_ipv4>
    set interface <interface name>
  end
```

Variable	Description	Default
<route_int>	Index number of the route in the routing table.	
destination <destination_ipv4mask>	Destination IP address and netmask of traffic that is subject to this route, separated by a space. To indicate all traffic regardless of IP address and netmask, enter 0.0.0.0 0.0.0.0.	0.0.0.0 0.0.0.0
gateway <gateway_ipv4>	IP address of the gateway router.	0.0.0.0
set interface <interface name>	Network interface associated with this route.	

config system time manual

Use this command to manually configure the FortiNDR system time.

Accurate system time is required by many features such as log messages and SSL-secured connections.

This command applies only if NTP is disabled. Alternatively, you can configure FortiAI to synchronize its system time with an NTP server.

Syntax

```
config system time manual
  set daylight-saving-time {disable | enable}
  set zone <zone_int>
end
```

Variable	Description	Default
daylight-saving-time {disable enable}	Enable to automatically adjust the system time for daylight-saving time (DST).	enable
zone <zone_int>	The number which indicates the time zone where the FortiAI unit is located.	

config system time ntp

Use this command to configure FortiAI to synchronize its system time with a network time protocol (NTP) server.

Accurate system time is required by many features of FortiAI such as log messages and SSL-secured connections.

Syntax

```
config system time ntp
    set ntpserver {<address_ipv4> | <fqdn_str>}
    set ntpsync {enable | disable}
    set syncinterval <interval_int>
end
```

Variable	Description	Default
ntpserver {<address_ipv4> <fqdn_str>}	IP address or FQDN of an NTP server. You can add a maximum of ten NTP servers. FortiAI uses the first NTP server based on the selection mechanism of the NTP protocol. To locate a public NTP server, visit http://www.ntp.org/ .	pool.ntp.org
ntpsync {enable disable}	Enable to synchronize FortiAI with an NTP server instead of manually configuring the system time.	enable
syncinterval <interval_int>	The interval in minutes between synchronizations of the system time with the NTP server. The valid range is 1 to 1440.	

config system ICAP server

Use this command to configure ICAP server settings.

Syntax

```
config system icap server
    set conf-level <confidence_level_int>
    set interface {port1 | port2}
    set enable {1 | 0}
    set rtavscan {1 | 0}
    set ssl-port <ssl_port_int>
    set ssl-support {1 | 0}
    set port <port_int>
    set timeout <timeout_int>
end
```

Variable	Description	Default
conf-level <confidence_level_int>	The confidence of detection. Value is between 0 and 100.	80

Variable	Description	Default
interface {port1 port2}	Interface name.	Port1
enable {1 0}	Set to 1 to enable ICAP server. Set to 0 to disable the ICAP server.	
rtavscan {1 0}	Set to 1 to enable realtime FAI scan. Set to 0 to disable.	
timeout <timeout_int>	The maximum waiting time for realtime FAI scan.	10
ssl-port <ssl_port_int>	ICAP server SSL port number.	
ssl-support {1 0}	Set to 1 to enable SSL support. Set to 0 to disable it.	
port <port_int>	ICAP server port.	

config system global

Syntax

Use this command to configure the FortiNDR system-wide configuration.

```
config system global
    set hostname <str>
end
```

Variable	Description	Default
hostname <string>	Host name of FortiNDR	Varies by model

config system syslog fortianalyzer settings

Syntax

Use this command to configure a FortiAnalyzer remote server which will receive syslogs. FortiNDR system will send logs with specified type and severity (only for NDR type) to this remote server.

```
config system syslog fortianalyzer settings
    set ipaddr <ipv4mask>
    set port <int>
    set status {enable, disable}
    set type {event, malware, ndr}
    set ndr-severity {low, medium, high, critical}
end
```

Variable	Description	Default
Name <string>	Profile name	
ipaddr <ipv4mask>	The IP address of the remote server. Only IPv4 is supported.	0.0.0.0

Variable	Description	Default
port <int>	The port number of the remote server for syslog services.	514
status {enable, disable}	Enable or disable sending logs to this remote server.	disable
type {event, malware, ndr}	FortiNDR supports three types of logs: event, malware and ndr. Multiple choices are supported.	event, malware, ndr
ndr-severity {low, medium, high, critical}	Filtering by severity is supported for sending ndr type log,. The supported multiple choices are low, medium, high and critical.	low, medium, high, critical

config system syslog1 settings

Syntax

Use this command to configure a general remote server which can receive syslogs. FortiNDR system will send logs with specified type and severity (only for ndr type) to this remote server.

```
config system syslog1 settings
    set ipaddr <ipv4mask>
    set port <int>
    set status {enable, disable}
    set type {event, malware, ndr}
    set ndr-severity {low, medium, high, critical}
end
```

Variable	Description	Default
Name <string>	Profile name	
ipaddr <ipv4mask>	The IP address of the remote server. Only IPv4 is supported.	0.0.0.0
port <int>	The port number of the remote server for syslog services.	514
status {enable, disable}	Enable or disable sending logs to this remote server.	disable
type {event, malware, ndr}	FortiNDR supports three types of logs: event, malware and ndr. Multiple choices are supported.	event, malware, ndr
ndr-severity {low, medium, high, critical}	Filtering by severity is supported when sending ndr logs. The supported multiple choices are low, medium, high and critical.	low, medium, high, critical

config system syslog2 settings

Syntax

Use this command to configure a general remote server which will receive syslogs. FortiNDR system will send logs with specified type and severity (only for ndr log types) to this remote server.

```
config system syslog2 settings
    set ipaddr <ipv4mask>
    set port    <int>
    set status {enable, disable}
    set type    {event, malware, ndr}
    set ndr-severity {low, medium, high, critical}
end
```

Variable	Description	Default
Name <string>	Profile name	
ipaddr <ipv4mask>	The IP address of the remote server. Only IPv4 is supported.	0.0.0.0
port <int>	The port number of the remote server for syslog services.	514
status {enable, disable}	Enable or disable sending logs to this remote server.	disable
type {event, malware, ndr}	FortiNDR supports to three types of logs, including event, malware and ndr. Multiple choices are supported.	event, malware, ndr
ndr-severity {low, medium, high, critical}	Filtering by severity is supported when sending ndr logs. The supported multiple choices are low, medium, high and critical.	low, medium, high, critical

config log alertemail server

Syntax

Use this command to configure the Email server FortiNDR will use to send alert emails for events detected.

```
config log alertemail server
    set name < name >
    set openssl {enable|disable}
    set password <password>
    set port <port>
    set sendername <senderName>
    set username <username>
end
```

Variable	Description	Default
name	Name/IP of the mailing server.	smtp.fortinet.com
openssl	Enable/disable security connection for the email transaction.	disable
password	Password of the user in the mailing server.	
port	The port used to send email.	587
sendername	The email sender's name. This is different from username.	
username	Name of the user in the mailing server.	

Get commands

get profile ldap

Use this command to get the details of LDAP authentication setting.

Syntax

```
get profile ldap <ldap profile name>
```

get profile authentication radius

Use this command to get the details of RADIUS authentication setting.

Syntax

```
get profile authentication radius <RADIUS auth server name>
```

get system accprofile

Use this command to get the number of accprofile of the current system.

Syntax

```
get system accprofile
```

get system admin

Use this command to get information about FortiAI administrator accounts.

By default, FortiAI has a single administrator account: admin.

For more information about the attributes, see [config system admin on page 13](#).

Syntax

```
get system admin <userName>
```

Example

When user name is not presented:

```
== [ admin ]
status: enable      trusted-hosts: 0.0.0.0/0 ::/0      auth-strategy: local
      access-profile: SuperAdminProfile      user-profile:
```

When user name is presented:

```
username           : admin
name               :
wildcard           : disable
status            : enable
trusted-hosts      : 0.0.0.0/0 ::/0
auth-strategy      : local
msg-methods        :
password           : *
radius-permission-check: disable
radius-vendor-id   : 0
radius-subtype-id  : 0
access-profile     : SuperAdminProfile
user-profile       :
theme              : Green
sshkey             :
assist-user        :
assist-password    : *
assist-access      : alexa ifttt
```

get system admin-list

Use this command to get the list of users that has accessed this server.

Syntax

```
get system admin-list
```

Example

```
[0] login-name: adminror at 'admin-list'. (-284)
access-profile: SuperAdminProfile
login-method: CONSOLEmin-list
login-time: Thu Nov 21 11:12:17 2019
timeout-time: Thu Nov 21 11:57:17 2019
process-ID: 10217
client-address:
```

get system appearance

Syntax

```
get system appearance
```

Example

```
Last Update Time      : 2019-11-20 17:34:10
```

get system automation-settings

Syntax

```
get system automation-settings <profile-name>
```

Example

When profile name is not presented:

```
name      Automation settings name
fgt1
```

When a specified profile name is presented

```
name          : fgt1
vdom           : root
api-key        : *
webhook-config : "{\"action\" : 1, \"webhook_exec\" : \"ip_blocker\", \"webhook_undo\" : \"ip_unblocker\"}"
ip             : 172.19.235.251
port           : 443
enabled        : enable
source         : fabric-device
```

get system dhcp server

Syntax

```
get system dhcp server
```

get system dns

Syntax

```
get system dns
```

Example

```
Last Update Time      : 2019-11-20 18:12:41
primary               : 208.91.112.53
secondary             : 208.91.112.52
private-ip-query      : disable
cache                 : enable
truncate-handling     : tcp-retry
protected-domain-dns-state : disable
protected-domain-dns-servers:
cache-min-ttl         : 300
```

get system enforcement-settings

Syntax

```
get system enforcement-settings
```

Example

```
Last Update Time      : 2020-07-31 10:00:00
allowlist              : 192.16.1.222/32
risk-level             : 4
conf-level             : 0.800000
```

get system interface

Syntax

```
get system interface <interface-name>
```

Example

When interface name is not presented:

```
== [ port1 ] (2019-11-05 05:22:30)
type: physical    redundant-master: 0    ip: 172.19.122.250/24    status: up
allowaccess: https ping ssh    discover: enable
```

When a specific interface name is presented:

```
name              : port1
type              : physical
mode              : static
redundant-master  :
ip                : 172.19.122.250/24
ip6               : ::/0
mtu               : 1500
speed             : auto
status            : up
mac-addr          : 00:0c:29:09:5a:55
```

```
allowaccess      : https ping ssh
discover         : enable
```

get system performance

Syntax

```
get system performance
```

Example

```
CPU usage:      0% used, 100% idle
Memory usage:   60% used
System Load:   18
Uptime:         1 days  21 hours  14 minutes
```

get system raid-status

Get information about RAID.

Syntax

```
get system raid-status
```

get system raid-status-detail

Get information about RAID including the available commands and detailed information of virtual and physical disks.

Syntax

```
get system raid-status-detail
```

get system route

Syntax

```
get system route <route number>
```

Example

Without specifying a route number:

```
== [ 1 ] (2019-11-21 09:45:24)
    destination: 0.0.0.0/0    gateway: 172.19.122.1    interface: port1
```

With specifying a route number:

```
<No.>          : 1
destination     : 0.0.0.0/0
gateway         : 172.19.122.1
interface       : port1
```

get system status

Syntax

```
get system status
```

Example

```
Version: FortiAI-3500F v1.5.2,build117,210903
Architecture: 64-bit
Serial-Number: FAI35FT319000026
BIOS version: 00010002
Log disk: Capacity 173 GB, Used 60 MB (0.04%), Free 173 GB
Data disk: Capacity 3313 GB, Used 25 GB (0.78%), Free 3287 GB
Remote disk: n/a
Memory: Capacity 375 GB, Used 25 GB (6.83%), Free 350 GB
Swap Memory: Capacity 31 GB, Used 0 MB (0.00%), Free 31 GB
Hostname: FAI35FT319000026
Strong-crypto: disabled
Distribution: International
Branch point: 117
Uptime: 3 days 16 hours 24 minutes
Last reboot: Fri Sep 03 19:29:00 MDT 2021
System time: Tue Sep 07 11:53:00 MDT 2021
Scenario AI DB: 1.076(2021-09-04 23:55)
Text AI Feature DB: 1.076(2021-09-04 23:56)
Text AI Group DB: 1.076(2021-09-04 23:56)
Text AI Learning Feature DB: 1.076(2021-09-04 23:56)
Binary Behavior DB: 1.082(2021-09-04 23:43)
Binary AI Feature DB: 1.082(2021-09-04 23:52)
Binary AI Group DB: 1.082(2021-09-04 23:52)
Binary AI Learning Feature DB: 1.082(2021-09-04 23:52)
Text AI Learning Engine: 1.004(2020-01-01 00:00)
Binary AI Engine: 1.053(2021-09-03 11:19)
Binary AI Learning Engine: 1.013(2021-09-03 11:19)
Scenario AI Engine: 1.001(2020-01-01 00:00)
Text AI Engine: 1.042(2020-01-01 00:00)
```

get system time manual

Syntax

```
get system time manual
```

Example

```
Last Update Time      :  
daylight-saving-time: enable  
zone                  : 4
```

get system time ntp

Syntax

```
get system time ntp
```

Example

```
Last Update Time      :  
ntpsync               : enable  
ntpserver              : ntp1.fortiguard.com ntp2.fortiguard.com  
syncinterval          : 60
```

Show and show full-configuration commands

Show commands display the FortiNDR configuration that is changed from the default setting. Unlike get commands, show commands do not display settings that remain in their default state.

For example, you might show the current DNS settings:

```
show system dns
  config system dns
    set primary 172.16.1.10
  end
```

If the command does not display the secondary DNS server settings, that indicates that it has not been configured or has reverted to its default value.

Show full-configuration commands display the full configuration including default settings. While similar to get commands, show full-configuration output uses configuration file syntax.

For example, you might show the current DNS settings, including settings that remain at their default values (in bold below):

```
show full-configuration system dns
  config system dns
    set primary 172.16.1.10
    set secondary 172.16.1.11
    set private-ip-query disable
    set cache enable
  end
```

Depending on whether you specify an object, the show command displays either the configuration that you have just entered but not yet saved or the configuration as it currently exists on disk.

For example, immediately after configuring the secondary DNS server setting but before saving it, show displays two outputs (differences in bold):

```
config system dns
  set secondary 192.168.1.10
  show
    config system dns
      set primary 172.16.1.10
      set secondary 192.168.1.10
    end
  show system dns
    config system dns
      set primary 172.16.1.10
    end
```

The first output indicates the value that you have configured but not yet saved; the second output indicates the value that was last saved to disk.

If you have entered settings but cannot remember how they differ from the existing configuration, the two different forms of show, with and without the object name, can be a useful reminder.

Diagnose commands

diagnose debug

Use this command to turn debug options on or off, set debug log levels, or check the FortiNDR log.

Syntax

```
diagnose debug application {cmdb_event | csfd | hahbd | hasyncd | httpd | miglogd | sshd |  
updated} <debug_level>  
diagnose debug cli <debug_level>  
diagnose debug coredump {clear|delete|disable|enable|list|status|upload}  
diagnose debug crashlog <crash_log_date>  
diagnose debug {enable | disable}  
debug file {clear|disable|enable|info|show|upload}  
diagnose debug kernel <debug_level>  
diagnose debug process <process_name>
```

Variable	Description	Default
debug_level	A number from 0 to 8.	
crash_log_date	A date in the format of yyyy-mm-dd to filter the crash log by date.	
process_name	<p>A specific process name. Available processes and explanations are as follows:</p> <p>file_helper = file processing daemon</p> <p>demo = data morking daemon</p> <p>event_flow = Scenario Engine</p> <p>moat_engine = Text AI Engine</p> <p>moat_learn = Text AI learning Engine</p> <p>pae2 = Binary AI Engine</p> <p>pae_learn = Binary AI learning Engine</p> <p>sniffer = Web packet sniffer</p> <p>sys_mon = system monitoring daemon</p> <p>oftpd = oftp daemon</p> <p>sim_engine = similarity engine</p>	

Module/daemon	Description
cmdb_event	Monitor FortiNDR configuration change events.
csfd	Daemon responsible for Fortinet security fabric(csfd) connection.
hahbd	Daemon responsible for HA heartbeat events.

Module/daemon	Description
hasyncd	Daemon responsible for HA data synchronization.
httpd	Daemon responsible for https service.
ldapcached	Daemon responsible for LDAP server querying service.
miglogd	Daemon responsible for system log generation.
sshd	Daemon responsible for SSH connections.
updated	Daemon responsible for FortiNDR license and ANN DB updates.

diagnose hardware

Use this command to display FortiAI device status and information, read data from an I/O port, list information on PCI buses and connected devices, set PCI configuration space data, and list system hardware information.

Syntax

```
diagnose hardware acceleratorinfo
diagnose hardware deviceinfo {nic | nic-detail}
diagnose hardware ioport {byte | word | long} <correspond_data>
diagnose hardware pciconfig {bus | id | option} <correspond_data>
diagnose hardware setpci pciconfig <device> <register> <data> option <option>
diagnose hardware sysinfo {cpu | interrupts | iomem | ioports | memory | mtrr | slab |
    stream | df}
```

Variable	Description	Default
diagnose hardware acceleratorinfo	Diagnose the accelerator status and information.	
deviceinfo {nic nic-detail}	Diagnose the list device status and information.	
ioport {byte word long} <correspond_data>	Diagnose the process of reading data from an I/O port.	
pciconfig {bus id option} <correspond_data>	Diagnose the list information on PCI buses and connected devices.	
setpci pciconfig <device> <register> <data> option <option>	Diagnose the process of setting PCI configuration space data.	ios
sysinfo {cpu interrupts iomem ioports memory mtrr slab stream df}	Diagnose the list system hardware information.	

diagnose kdb

Use this command to diagnose ANN DB (KDB) and display version.

Syntax

```
diagnose kdb
```

diagnose sniffer dump

Use this command to dump the data flow records of the network port to a specific TFTP server.

Ensure the remote TFTP files are created.

Syntax

```
diagnose sniffer dump <tftp IP> <local sniffer file name> <remote tftp server file name>
```

diagnose sniffer file

Use this command to manage the tcpdump recorded by the `sniffer packet` command.

Syntax

```
diagnose sniffer file {display|clear}
```

diagnose sniffer packet

Use this command to diagnose the sniffer database by dumping and checking data flow records of the network port.

Ensure the remote TFTP files are created.

Syntax

```
diagnose sniffer packet <interface> <filter> <verbose> <count> <time format> <file name>  
    <ttl> {background|NULL}  
diagnose sniffer packet {stop|status}
```

Variable	Description	Default
interface 'stop' 'status'	If an interface is specified, the tcpdump starts a process recording the data flow of that port. Use <code>stop</code> to stop a process that is working in the background.	any

Variable	Description	Default
	Use <code>status</code> to check the files that have been generated so far.	
<code>filter</code>	For example, to print UDP 1812 traffic between <code>forti1</code> and either <code>forti2</code> or <code>forti3</code> , use <code>udp and port 1812 and host forti1 and \(forti2 or forti3 \)</code> .	<code>none</code>
<code>verbose</code>	Set the verbosity of the record. The options are: 1: Print header of packets. 2: Print header and data from the IP address of packets. 3: Print header and data from the Ethernet of packets (if available). 4: Print header of packets with interface name. 5: Print header and data from IP address of packets with interface name. 6: Print header and data from Ethernet of packets (if available) with INTF name.	<code>1</code>
<code>count</code>	Maximum number of packets to be recorded in this attempt.	<code>-1</code>
<code>time format</code>	Time format of the record. The options are: <code>a</code> : Absolute UTC time in yyyy-mm-dd hh:mm:ss.ms format. <code>relative</code> : Relative to the start of sniffing in ss.ms format.	<code>relative</code>
<code>file name</code>	File name of the record for this recording attempt.	
<code>ttd</code>	Maximum time allowed for this record attempt to run (in minutes).	
<code>{background}</code>	Optional variable to specify if this recording attempt executes in the backend or displays on the console.	<code>NULL</code>

diagnose session list

Use this command to diagnose the active session lists.

Syntax

```
diagnose session list
```

Example

```
System Time: 2019-11-21 13:51:48 PST (Uptime: 1d 22h 36m)
Protocol Remote IP Remote Port Local IP Local Port Expire(s)
tcp 72.19.122.220 57575 172.19.122.250 5432 22
tcp 172.19.122.220 52413 172.19.122.250 22 320
```

diagnose system csf global

Show a summary of all connected members in Security Fabric.

Syntax

```
diagnose system csf global
```

Example

```
{
  "path": "FGVM16TM00000000:FAI35FT000000000",
  "mgmt_ip_str": "",
  "mgmt_port": 443,
  "sync_mode": 1,
  "saml_role": "disable",
  "admin_port": 443,
  "serial": "FAI35FT000000000",
  "host_name": "FAI35FT000000000",
  "firmware_version_major": 1,
  "firmware_version_minor": 5,
  "firmware_version_patch": 0,
  "firmware_version_build": 1,
  "device_type": "fortiai",
  "upstream_intf": "port1",
  "upstream_serial": "FGVM16TM00000000",
  "parent_serial": "FGVM16TM00000000",
  "parent_hostname": "FGVM",
  "upstream_status": "Authorized",
  "upstream_ip": -68480084,
  "upstream_ip_str": "172.19.1.1",
  "subtree_members": [
  ],
  "is_discovered": true,
  "ip_str": "172.19.1.2",
  "downstream_intf": "port2",
  "upstream_vdom": "root",
  "authorization_type": "certificate",
  "authorization_entry_name": "FAI35FT000000000",
  "idx": 3
}
```

diagnose system csf upstream

Show connected upstream FortiGates.

Syntax

```
diagnose system csf upstream
```

Example

```
System Time: 2021-04-11 01:01:01PDT (Uptime: 0d 1h 0m)
Upstream Information:
Serial Number:FGVM16TM000000000
IP:172.19.1.1
Connecting interface:port1
Connection status:Authorized
Saml setting not generated
```

diagnose system disk info

Disk hardware status information.

Syntax

```
diagnose system disk info
```

Example

```
System Time: 2020-06-06 11:57:01 PDT (Uptime: 0d 21h 11m)
Disk 0:
Device Model:      SSDSC2KB038T8R
Serial Number:     PHYF915502NZ3P8EGN
LU WWN Device Id:  5 5cd2e4 150d5a715
Add. Product Id:   DELL(tm)
Firmware Version:  XCV1DL63
User Capacity:     3,840,755,982,336 bytes [3.84 TB]
Sector Sizes:      512 bytes logical, 4096 bytes physical
Rotation Rate:     Solid State Device
Form Factor:       2.5 inches
Device is:         Not in smartctl database [for details use: -P showall]
ATA Version is:    ACS-3 (unknown minor revision code: 0x006d)
SATA Version is:   SATA >3.1, 6.0 Gb/s (current: 6.0 Gb/s)
Local Time is:     Sat Jun 6 11:57:01 2020 PDT
SMART support is:  Available - device has SMART capability.
SMART support is:  Enabled

Disk 1:
Device Model:      SSDSC2KB038T8R
Serial Number:     PHYF915502R93P8EGN
LU WWN Device Id:  5 5cd2e4 150d5a75d
Add. Product Id:   DELL(tm)
Firmware Version:  XCV1DL63
User Capacity:     3,840,755,982,336 bytes [3.84 TB]
Sector Sizes:      512 bytes logical, 4096 bytes physical
Rotation Rate:     Solid State Device
Form Factor:       2.5 inches
Device is:         Not in smartctl database [for details use: -P showall]
ATA Version is:    ACS-3 (unknown minor revision code: 0x006d)
SATA Version is:   SATA >3.1, 6.0 Gb/s (current: 6.0 Gb/s)
Local Time is:     Sat Jun 6 11:57:01 2020 PDT
```

```
SMART support is: Available - device has SMART capability.
SMART support is: Enabled
```

diagnose system disk summary

Summary of smartctl details.

Syntax

```
diagnose system disk summary
```

Example

```
System Time: 2020-06-06 11:58:52 PDT (Uptime: 0d 21h 13m)
Smartctl Results
```

Device	Overall Health	Realloc Sectors	Pending Sectors	Seek Count	Last Run Test
/dev/sda	PASSED	0	0	0	extended,completed without error
/dev/sda	PASSED	0	0	0	extended,completed without error
/dev/sdb	NOT-SUPPORTED				

diagnose system disk health

Health information of this disk.

Syntax

```
diagnose system disk health
```

Example

```
System Time: 2019-11-21 18:24:26 GMT (Uptime: 0d 0h 0m)
smartctl 6.3 2014-07-26 r3976 [x86_64-linux-4.9.60-3500F] (local build)
Copyright (C) 2002-14, Bruce Allen, Christian Franke, www.smartmontools.org

/dev/sda [megaraid_disk_00] [SAT]: Device open changed type from 'megaraid,0' to
'sat+megaraid,0'
=== START OF READ SMART DATA SECTION ===
SMART Status not supported: ATA return descriptor not supported by controller firmware
SMART overall-health self-assessment test result: PASSED
Warning: This result is based on an Attribute check.

smartctl 6.3 2014-07-26 r3976 [x86_64-linux-4.9.60-3500F] (local build)
Copyright (C) 2002-14, Bruce Allen, Christian Franke, www.smartmontools.org

/dev/sda [megaraid_disk_01] [SAT]: Device open changed type from 'megaraid,1' to
'sat+megaraid,1'
```

```

=== START OF READ SMART DATA SECTION ===
SMART Status not supported: ATA return descriptor not supported by controller firmware
SMART overall-health self-assessment test result: PASSED
Warning: This result is based on an Attribute check.

smartctl 6.3 2014-07-26 r3976 [x86_64-linux-4.9.60-3500F] (local build)
Copyright (C) 2002-14, Bruce Allen, Christian Franke, www.smartmontools.org

/dev/sdb: Unknown USB bridge [0x196d:0x0201 (0x1120)]
Please specify device type with the -d option.

Use smartctl -h to get a usage summary

```

diagnose system disk attributes

Information about the attributes of this disk.

Syntax

```
diagnose system disk attributes
```

Example

```

diagnose system disk attributes

System Time: 2019-11-21 17:59:00 GMT (Uptime: 0d 0h 1m)
smartctl 6.3 2014-07-26 r3976 [x86_64-linux-4.9.60-3500F] (local build)
Copyright (C) 2002-14, Bruce Allen, Christian Franke, www.smartmontools.org

/dev/sda [megaraid_disk_00] [SAT]: Device open changed type from 'megaraid,0' to
'sat+megaraid,0'

=== START OF READ SMART DATA SECTION ===
SMART Attributes Data Structure revision number: 1
Vendor Specific SMART Attributes with Thresholds:
ID# ATTRIBUTE_NAME          FLAG      VALUE WORST THRESH TYPE      UPDATED  WHEN_FAILED RAW_
VALUE
  1 Raw_Read_Error_Rate     0x000e    130   130   039   Old_age  Always      -
15079102
  5 Reallocated_Sector_Ct   0x0033    100   100   001   Pre-fail Always      -        0
  9 Power_On_Hours          0x0032    100   100   000   Old_age  Always      -        5
 12 Power_Cycle_Count       0x0032    100   100   000   Old_age  Always      -       24
 13 Read_Soft_Error_Rate    0x001e    083   080   000   Old_age  Always      -
1095231739582
 170 Unknown_Attribute      0x0033    100   100   010   Pre-fail Always      -        0
 174 Unknown_Attribute      0x0032    100   100   000   Old_age  Always      -       24
 179 Used_Rsvd_Blks_Cnt_Tot 0x0033    100   100   010   Pre-fail Always      -        0
 180 Unused_Rsvd_Blks_Cnt_Tot 0x0032    100   100   000   Old_age  Always      -    25540
 181 Program_Fail_Cnt_Total  0x003a    100   100   000   Old_age  Always      -        0
 182 Erase_Fail_Count_Total  0x003a    100   100   000   Old_age  Always      -        0
 184 End-to-End_Error        0x0032    100   100   000   Old_age  Always      -        0

```


Diagnose commands

```

194 Temperature_Celsius      0x0022   100   100   000   Old_age Always - 18
195 Hardware_ECC_Recovered    0x0032   100   100   000   Old_age Always - 0
197 Current_Pending_Sector    0x0012   100   100   000   Old_age Always - 0
198 Offline_Uncorrectable     0x0010   100   100   000   Old_age Offline - 0
199 UDMA_CRC_Error_Count      0x003e   100   100   000   Old_age Always - 0
201 Unknown_SSD_Attribute     0x0033   100   100   010   Pre-fail Always -
    120275667391
202 Unknown_SSD_Attribute     0x0027   100   100   000   Pre-fail Always - 0
225 Unknown_SSD_Attribute     0x0032   100   100   000   Old_age Always - 15898
226 Unknown_SSD_Attribute     0x0032   100   100   000   Old_age Always - 0
227 Unknown_SSD_Attribute     0x0032   100   100   000   Old_age Always - 99
228 Power-off_Retract_Count    0x0032   100   100   000   Old_age Always - 77
232 Available_Reservd_Space    0x0033   100   100   010   Pre-fail Always - 0
233 Media_Wearout_Indicator    0x0032   100   100   000   Old_age Always - 15898
234 Unknown_Attribute         0x0032   100   100   000   Old_age Always - 0
241 Total_LBAs_Written        0x0032   100   100   000   Old_age Always - 15898
242 Total_LBAs_Read           0x0032   100   100   000   Old_age Always -
132126
245 Unknown_Attribute         0x0032   100   100   000   Old_age Always - 100

```

```

smartctl 6.3 2014-07-26 r3976 [x86_64-linux-4.9.60-3500F] (local build)
Copyright (C) 2002-14, Bruce Allen, Christian Franke, www.smartmontools.org

```

```

/dev/sda [megaraid_disk_01] [SAT]: Device open changed type from 'megaraid,1' to
'sat+megaraid,1'

```

```

=== START OF READ SMART DATA SECTION ===

```

```

SMART Attributes Data Structure revision number: 1

```

```

Vendor Specific SMART Attributes with Thresholds:

```

ID#	ATTRIBUTE_NAME	FLAG	VALUE	WORST	THRESH	TYPE	UPDATED	WHEN_FAILED	RAW_
1	Raw_Read_Error_Rate	0x000e	130	130	039	Old_age	Always	-	
11512623									
5	Reallocated_Sector_Ct	0x0033	100	100	001	Pre-fail	Always	-	0
9	Power_On_Hours	0x0032	100	100	000	Old_age	Always	-	5
12	Power_Cycle_Count	0x0032	100	100	000	Old_age	Always	-	24
13	Read_Soft_Error_Rate	0x001e	079	077	000	Old_age	Always	-	
2332178754351									
170	Unknown_Attribute	0x0033	100	100	010	Pre-fail	Always	-	0
174	Unknown_Attribute	0x0032	100	100	000	Old_age	Always	-	24
179	Used_Rsvd_Blks_Cnt_Tot	0x0033	100	100	010	Pre-fail	Always	-	0
180	Unused_Rsvd_Blks_Cnt_Tot	0x0032	100	100	000	Old_age	Always	-	25538
181	Program_Fail_Cnt_Total	0x003a	100	100	000	Old_age	Always	-	0
182	Erase_Fail_Count_Total	0x003a	100	100	000	Old_age	Always	-	0
184	End-to-End_Error	0x0032	100	100	000	Old_age	Always	-	0
194	Temperature_Celsius	0x0022	100	100	000	Old_age	Always	-	18
195	Hardware_ECC_Recovered	0x0032	100	100	000	Old_age	Always	-	0
197	Current_Pending_Sector	0x0012	100	100	000	Old_age	Always	-	0
198	Offline_Uncorrectable	0x0010	100	100	000	Old_age	Offline	-	0
199	UDMA_CRC_Error_Count	0x003e	100	100	000	Old_age	Always	-	0
201	Unknown_SSD_Attribute	0x0033	100	100	010	Pre-fail	Always	-	
120275601610									
202	Unknown_SSD_Attribute	0x0027	100	100	000	Pre-fail	Always	-	0
225	Unknown_SSD_Attribute	0x0032	100	100	000	Old_age	Always	-	15931
226	Unknown_SSD_Attribute	0x0032	100	100	000	Old_age	Always	-	0

```

227 Unknown_SSD_Attribute 0x0032 100 100 000 Old_age Always - 100
228 Power-off_Retract_Count 0x0032 100 100 000 Old_age Always - 77
232 Available_Reservd_Space 0x0033 100 100 010 Pre-fail Always - 0
233 Media_Wearout_Indicator 0x0032 100 100 000 Old_age Always - 15931
234 Unknown_Attribute 0x0032 100 100 000 Old_age Always - 0
241 Total_LBAs_Written 0x0032 100 100 000 Old_age Always - 15931
242 Total_LBAs_Read 0x0032 100 100 000 Old_age Always -
132056
245 Unknown_Attribute 0x0032 100 100 000 Old_age Always - 100

```

smartctl 6.3 2014-07-26 r3976 [x86_64-linux-4.9.60-3500F] (local build)
 Copyright (C) 2002-14, Bruce Allen, Christian Franke, www.smartmontools.org

/dev/sdb: Unknown USB bridge [0x196d:0x0201 (0x1120)]

Please specify device type with the -d option.
 Use smartctl -h to get a usage summary

diagnose system disk-details

Syntax

```
diagnose system disk-details
```

Example

```

System Time: 2019-11-21 14:01:55 PST (Uptime: 1d 22h 47m)
for type for-var-physical
+device-name=sdb
| is-enc=0
| is-dma=1
| is-usb=0
| size=26843545600 (opt=0,min=512,alg=0,phy=512,log=512,grn=1048576)
+-----part-name=sdb1
| size=26835157504
| start=1048576(aligned)
| is-mounted=0
| fs-type=LVM2

```

diagnose system ntp-status

Use this command to print the NTP sync status.

Syntax

```
diagnose system ntp-status
```

Example

```
System Time: 2019-11-21 14:03:11 PST (Uptime: 1d 22h 48m)
```

```

remote          refid          st t when poll reach  delay  offset  jitter
=====
*LOCAL(0)       .LOCL.          10 l   20   64  377    0.000   0.000   0.000
208.91.113.70    172.16.101.30   2 u   259 1024    0    0.913   0.005   0.000
208.91.114.23    .FTNT.          1 u    6h 1024    0    1.335   0.404   0.000

```

diagnose system top

Use this command to display:

- Up time (run time).
- Current total processor and memory usage.
- Current free memory.
- The most resource-intensive system processes and daemons showing their memory (RAM) and processor (CPU) usage.

The first two lines of the display indicate the up time, and the processor and memory usage. Processor and memory usages on the second line have abbreviated labels shown below in bold.

Run Time: 0 days, 21 hours and 3 minutes

0U, 4S, 95I; 1035792T, 646920F

Letter	Description
U	User CPU usage (%)
S	System CPU usage (%)
I	Idle CPU usage (%)
T	Total memory (KB)
F	Free memory (KB)

The remaining lines contain the process list, which has the following columns:

Column 1 is the process name, such as SSHD.

Column 2 is the process ID (PID) number, such as 731.

Column 3 is the status:

- S: Sleeping (idle)
- R: Running
- Z: Zombie (crashed)

You might be able to restart a zombie process without rebooting. See [execute reload on page 60](#).

- <: High priority
- N: Low priority

Column 4 is CPU usage (%).

Column 5 is memory usage (%).

When the command is running, you can sort the process list. The default sort order is by CPU usage.

- Shift + P: Sort by CPU usage.
- Shift + M: Sort by memory usage.

Process list output displays in your CLI window until you stop it by pressing *q* or *Ctrl + C*.

Syntax

```
diagnose system top <refresh_int>
```

Variable	Description	Default
<refresh_int>	The interval between each refresh of the process list in seconds. For example, to refresh the process list every 5 seconds, type 5.	

Example

This example refreshes the display of the top 19 most system-intensive processes every five seconds. The output indicates that FortiAI is mostly idle except for some processor resources used by a connection to the web UI (`admin.fe`) and to the CLI.

```
diagnose system top 5
Run Time: 0 days, 21 hours and 3 minutes
0U, 4S, 95I; 1035792T, 646920F
admin.fe 987 S 6.0 0.0
admin.fe 979 S 1.4 0.0
cli 984 R 0.2 0.0
miglogd 755 S 0.2 0.0
dbmanager 731 S 0.0 0.0
mailfilter 767 S 0.0 0.0
httpd 972 S 0.0 0.0
smtpd 793 S 0.0 0.0
smtpd 796 S 0.0 0.0
dbdaemon 766 S 0.0 0.0
smtpd 829 S 0.0 0.0
smtpd 830 S 0.0 0.0
smtpd 831 S 0.0 0.0
smtpd 828 S 0.0 0.0
smtpproxy 780 S 0.0 0.0
spamreport 790 S 0.0 0.0
fmlmonitor 799 S 0.0 0.0
cmdbsvr 745 S 0.0 0.0
netd 756 S 0.0 0.0
```

diagnose system vm

Use this command to diagnose the virtual machine state.

Syntax

```
Diagnose system vm
```

Example:

```
System Time: 2022-04-19 01:35:33 PDT (Uptime: 0d 8h 9m)
UUID:        420c1e91dbd40952f9c6e5a4b0500acb
File:        VM license file is valid.
Resources:   32 vcpus/32 allowed
Management IP: 0.0.0.0
Registered:  1 (True)
Status:      1 (Valid: Full License is in use.(Expire in 366 days 23 hours))
FDS code:    200
Warn count:  0
Copy count:  0
Received:    1720285758
Warning:     0
Recv:        202204190654
Dup:
```

diagnose system db

Use this command to diagnose and patch database if missing change has been detected. The process may take up to 10 mins.

Syntax

```
Diagnose system db
```

Execute commands

execute date

Use this command to set the system date.

Syntax

```
execute date <date_str>
```

Variable	Description	Default
<date_str>	The system date in mm/dd/yyyy format.	

execute demo

Use this command to enable or disable demo mode.



Demo Mode is only available on FortiNDR VM.

Syntax

```
execute demo {on|off}
```

execute expandspooldisk

Use this command to expand `/var/spool` disk without losing pre-existing data; This disk is mainly used for storing training data and detection history.

Syntax

```
execute expandspooldisk
```

execute export file-report

Use this command to export the FortiNDR detection history as a .csv file.

Syntax

```
execute export file-report {disk|scp|ftp|tftp} <filename-to-be-saved> <server>[:ftp port]
<user-name> <password>
```

execute export detected-files

Use this command to export the detected files by FortiNDR as a zip file with password. The password of the zip file is *infected*.

Syntax

```
execute export detected-files {disk|scp|ftp|tftp} <filename-to-be-saved> <server>[:ftp
port] <user-name> <password>
```



For the disk option to work, you have to insert a USB flash drive into the FortiNDR device. Please make sure the flash drive has enough storage.

execute api-key

Use this command to generate an API key for a system user.



If you want to specify an API key instead of the key automatically generated by FortiNDR, the API key string must be 31 characters in length and contain only upper and lower case letters, and numbers.

Syntax

```
execute api-key <system-user-name> [user-specified-API-key]
```

execute db restore

Use this command to restore the database.

Syntax

```
execute db restore
```

execute db sample_process_summary

Use this command to get the processing status of FortiNDR within a specific time period.

Syntax

```
execute db sample_process_summary <from_date> <to_date>
```

Example of results

```
Sample accepted           :192
Distinct sample accepted  :88
Sample processed          :192
Distinct sample accepted  :88
Sample detected           :192
infected host count       :1
distinct infected remote IP :10
distinct infected host IP  :5
```

execute factoryreset config

Use this command to reset the configuration only.



Back up your configuration before using this command. This command makes major changes to your configuration. If you are downgrading the firmware, this procedure resets all changes you have made to the FortiNDR configuration file and reverts the system to the default values for that firmware version, including factory default settings for the IP addresses of network interfaces. For information on creating a backup, see the FortiAI Administration Guide in the [Fortinet Document Library](#).

Syntax

```
execute factoryreset config
```

execute factoryreset disk

Use this command to reset the RAID level and partition the disk to default settings. This command does not reset the configuration such as IP configuration.



Back up all data on the disks before using this command. This command deletes all files on the disk.

Syntax

```
execute factoryreset disk
```


execute factoryreset

Use this command to reset FortiNDR to its default settings for the currently installed firmware version. If you have not upgraded or downgraded the firmware, this restores factory default settings.



Back up your configuration before using this command. This procedure resets all changes you have made to the FortiNDR configuration file and reverts the system to the default values for the firmware version, including factory default settings for the IP addresses of network interfaces. For information on creating a backup, see the FortiNDR Administration Guide in the [Fortinet Document Library](#).

Syntax

```
execute factoryreset
```

Example

```
execute factoryreset
```

The CLI displays the following:

```
This operation will change all settings to  
factory default! Do you want to continue? (y/n)
```

If you enter `y` (yes), the CLI displays the following and logs you out of the CLI:

```
System is resetting to factory default...
```

execute formatdatadisk

Use this command to format the local hard disk that contains training data as well as detection history.

Format the disk regularly to improve performance.

Syntax

```
execute formatdatadisk
```

execute formatlogdisk

Use this command to reformat the local hard disk that contains log data. This command also reboots the unit.

Format the disk regularly to improve performance.



Back up all data on the disks before using this command. This command deletes all files on the disk.

Syntax

```
execute formatlogdisk
```

Example

```
execute formatlogdisk
```

The CLI displays the following:

```
This operation will erase all data on the log disk!  
Do you want to continue? (y/n)
```

After you enter **y** (yes), the CLI displays the following and logs you out of the CLI:

```
Formatting disk, Please wait a few seconds!
```

execute learner

Use this command to enable or disable FortiNDR learners.

Syntax

```
execute learner {on|off}
```

execute ha test-failover

Use this command to trigger an HA failover. This command should only be used on the primary FortiNDR unit of the primary-secondary HA group.

Syntax

```
execute ha test-failover
```

execute partitiondisk

Use this command to adjust the size ratio of the hard disk partitions for log and training data.



Back up all data on the disks before using this command. This command deletes all files on the disk.

Syntax

```
execute partitiondisk <percentage_str>
```

Variable	Description	Default
partitiondisk <percentage_str>	Enter an integer between 1 and 95 to create a partition of that percentage of the total hard disk space for the log disk. The remaining space is for the data disk.	5

execute ping

Use this command to perform an ICMP ECHO request (a ping) to a host by specifying its FQDN or IP address.

Syntax

```
execute ping {<fqdn_str> | <host_ipv4>}
```

Variable	Description	Default
ping {<fqdn_str> <host_ipv4>}	IP address or FQDN of the host.	

Example 1

```
execute ping 172.16.1.10
```

The CLI displays the following:

```
PING 172.16.1.10 (172.16.1.10): 56 data bytes
64 bytes from 172.16.1.10: icmp_seq=0 ttl=128 time=0.5 ms
64 bytes from 172.16.1.10: icmp_seq=1 ttl=128 time=0.2 ms
64 bytes from 172.16.1.10: icmp_seq=2 ttl=128 time=0.2 ms
64 bytes from 172.16.1.10: icmp_seq=3 ttl=128 time=0.2 ms
64 bytes from 172.16.1.10: icmp_seq=4 ttl=128 time=0.2 ms
--- 172.16.1.10 ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 0.2/0.2/0.5 ms
```

The results of the ping indicate that a route exists between FortiWeb and 172.16.1.10. It also indicates that during the sample period, there was no packet loss and the average response time was 0.2 milliseconds (ms).

Example 2

```
execute ping 10.0.0.1
```

The CLI displays the following:

```
PING 10.0.0.1 (10.0.0.1): 56 data bytes
```

After several seconds with no output, the administrator stops the ping by pressing *Ctrl + C*. The CLI displays the following:

```
--- 10.0.0.1 ping statistics ---
5 packets transmitted, 0 packets received, 100% packet loss
```

The results of the ping indicate that the host might be down or there is no route between FortiNDR and 10.0.0.1.

execute raidlevel

Use this command to reset the RAID level and partition the disk.

Syntax

```
execute raidlevel <raid-level-option>
```

execute reboot

Use this command to restart FortiAI.

Syntax

```
execute reboot
```

Example

```
execute reboot
```

The CLI displays the following:

```
This operation will reboot the system !  
Do you want to continue? (y/n)
```

After you enter `y` (yes), the CLI displays the following:

```
System is rebooting...
```

If you are connected to the CLI through a local console, the CLI displays messages during the reboot.

If you are connected to the CLI through the network, the CLI does not display any notifications during the reboot since the connection is terminated.

execute reload

If you set your console to batch mode, use this command to flush the current configuration from system memory and reload the configuration from a previously saved configuration file.

You can also use this command to reload individual daemons that have crashed, in this syntax:

```
execute reload [{httpd | ...}]
```

where `[{httpd | ...}]` is the name of the daemon you want to restart.

For example, if HTTP and HTTPS access are enabled but you cannot get a connection response on the GUI, although you can still connect via SSH and ping. So you know that FortiAI has not crashed entirely. If you do not want to reboot as this would interrupt SMTP, you can try to restart the HTTP daemon only.

```
execute reload httpd  
Restart httpd?  
Do you want to continue? (y/n)y
```

```
Reloading httpd....done
```

This command does not check if the daemon actually exists. If the command does not execute in a few seconds, it is possible that the daemon might not exist.

Syntax

```
execute reload [<daemon_name>]
```

execute restore config

Use this command to restore a primary configuration file from a TFTP server.



Back up your configuration before using this command. This command makes major changes to your configuration. If you are downgrading the firmware, this procedure resets all changes you have made to the FortiNDR configuration file and reverts the system to the default values for that firmware version, including factory default settings for the IP addresses of network interfaces. For information on creating a backup, see the FortiAI Administration Guide in the [Fortinet Document Library](#).



Unlike installing firmware via TFTP during a boot interrupt, installing firmware using this command will attempt to preserve settings and files, and not necessarily restore the FortiNDR unit to its firmware/factory default configuration. For information on installing firmware via TFTP boot interrupt, see the FortiNDR Administration Guide.

Syntax

```
execute restore config {disk <filename> | ftp <file name> <server_ipv4> | scp <file name>
<server_ipv4> | tftp <file name> <server_ipv4>}
```

Variable	Description	Default
<filename_str>	Name of the configuration file you want to restore from the TFTP server.	
<server_ipv4>	IP address of the TFTP server where the configuration file is stored.	
management-station {normal template}	If you want to restore a configuration file or apply a template stored in FortiManager, enter the management-station and then enter either: normal: Restore a configuration revision number. template: Apply a template revision number.	
<revision_int>	If you want to restore a configuration file or apply a template stored in FortiManager, enter the revision number of the configuration file or template.	

Example 1

This example restores configuration file revision 2 which is stored in FortiManager.

```
execute restore config management-station normal 2
```

The CLI displays the following:

```
This operation will overwrite the current settings!  
Do you want to continue? (y/n)
```

After you enter **y** (yes), the CLI displays the following:

```
Connect to FortiManager ...  
Please wait...
```

Example 2

This example restores a configuration file from a TFTP server at 172.16.1.5.

```
execute restore config tftp fml.cfg 172.16.1.5
```

The CLI displays the following:

```
This operation will overwrite the current settings!  
(The current admin password will be preserved.)  
Do you want to continue? (y/n)
```

After you enter **y** (yes), the CLI displays the following, then terminates the SSH connection and reboots with the restored configuration:

```
Connect to tftp server 172.16.1.5 ...  
Please wait...
```

```
Get config file from tftp server OK.  
File check OK.
```

execute restore image

Use this command to restore a firmware file from a TFTP server or a FortiManager unit.



Back up your configuration before using this command. This command makes major changes to your configuration. If you are downgrading the firmware, this procedure resets all changes you have made to the FortiNDR configuration file and reverts the system to the default values for that firmware version, including factory default settings for the IP addresses of network interfaces. For information on creating a backup, see the FortiAI Administration Guide in the [Fortinet Document Library](#).

Syntax

```
execute restore image {disk <filename> | ftp <file name> <server_ipv4> | scp <file name>  
    <server_ipv4> | tftp <file name> <server_ipv4>}
```

Variable	Description	Default
<filename_str>	Name of the firmware file on the TFTP server.	
<server_ipv4>	IP address of the TFTP server where the firmware file is stored.	

Example

This example restores firmware file FAI_3500F-v12-build0047-FORTINET.out, which is stored on the TFTP server 192.168.1.20.

```
execute restore image tftp FAI_3500F-v12-build0047-FORTINET.out 192.168.1.20
```

The CLI displays the following:

```
This operation will replace the current firmware version!
Do you want to continue? (y/n)
```

After you enter **y** (yes), the CLI displays the following:

```
Connect to tftp server 192.168.1.20 ...
Please wait...
#####
Get image from tftp server OK.
Check image OK.
execute restore image {disk <filename> | ftp <file name> <server_ipv4> | scp <file name>
<server_ipv4> | tftp <file name> <server_ipv4>}
```

execute restore kdb

Use this command to restore, upgrade, or downgrade the FortiNDR ANN database. This command replaces the existing ANN database.

Syntax

```
execute restore kdb {disk <filename> | ftp <file name> <server_ipv4> | scp <file name>
<server_ipv4> | tftp <file name> <server_ipv4>}
```

Variable	Description	Default
<filename_str>	Name of the firmware file on the TFTP server.	
<server_ipv4>	IP address of the TFTP server where the firmware file is stored.	

execute shutdown

Use this command to prepare the FortiNDR unit to be powered down by halting the software, clearing all buffers, and writing all cached data to disk.



Power off the FortiNDR unit only after issuing this command. Unplugging or switching off the FortiNDR unit without issuing this command could result in data loss.

Syntax

```
execute shutdown
```

Example

```
execute shutdown
```

The CLI displays the following:

```
This operation will halt the system
(power-cycle needed to restart)!Do you want to continue? (y/n)
```

After you enter **y** (yes), the CLI displays the following:

```
System is shutting down...(power-cycle needed to restart)
```

If you are connected to the CLI through a local console, the CLI displays a message when the shutdown is complete.

If you are connected to the CLI through the network, the CLI does not display any notifications and the connection times out.

execute ssh

Use this command as the Linux `ssh` command.

Syntax

```
execute ssh <user@host>
```

execute telnettest

Use this command to test Telnet connectivity to a host.

Syntax

```
execute telnettest {<fqdn_str> | <host_ipv4>}[:<port_int>]
```

Variable	Description	Default
{<fqdn_str> <host_ipv4>}	IP address or FQDN of the Telnet server.	
[:<port_int>]	If the Telnet server listens on a port number other than port 23, enter a colon (:) followed by the port number.	:23

Example

This example tests the connection to an Telnet server at 192.168.1.10 on port 2323.

```
execute telnettest 192.168.1.10:2323
```


The CLI displays the following:

```
(using 192.168.1.20 to connect)
Remote Output(hex):
FF FD 18 FF FD 20 FF FD
23 FF FD 27
Connection Status:
Connecting to remote host succeeded.
```

execute traceroute

Use this command to use ICMP to test the connection between FortiNDR and another network device, and display information about the time required for network hops between FortiNDR and that device.

Syntax

```
execute traceroute {<fqdn_str> | <host_ipv4>}
```

Variable	Description	Default
traceroute {<fqdn_str> <host_ipv4>}	IP address or FQDN of the host.	

Example 1

This example tests connectivity between FortiNDR and <http://docs.fortinet.com>. In this example, the trace times out after the first hop indicating a possible connectivity problem at that point in the network.

```
execute traceoute docs.fortinet.com
traceroute to docs.fortinet.com (65.39.139.196), 30 hops max, 38 byte packets
1  172.16.1.200 (172.16.1.200) 0.324 ms 0.427 ms 0.360 ms
2  * * *
```

Example 2

This example tests the availability of a network route to the server example.com.

```
execute traceroute example.com
```

The CLI displays the following:

```
traceroute to example.com (192.168.1.10), 32 hops max, 72 byte packets
1  172.16.1.2  0 ms 0 ms 0 ms
2  10.10.10.1  <static.isp.example.net> 2 ms 1 ms 2 ms
3  10.20.20.1   1 ms  5 ms  1 ms
4  10.10.10.2  <core.isp.example.net> 171 ms 186 ms 14 ms
5  10.30.30.1  <isp2.example.net> 10 ms 11 ms 10 ms
6  10.40.40.1  73 ms 74 ms 75 ms
7  192.168.1.1  79 ms 77 ms 79 ms
8  192.168.1.2 73 ms 73 ms 79 ms
9  192.168.1.10 73 ms 73 ms 79 ms
10 192.168.1.10 73 ms 73 ms 79 ms
```

Example 3

This example attempts to test connectivity between FortiNDR and example.com. However, FortiNDR cannot trace the route because the primary or secondary DNS server that FortiNDR is configured to query cannot resolve the FQDN example.com into an IP address, and so it does not know to which IP address it should connect. As a result, an error message displays.

```
execute traceroute example.com
traceroute: unknown host example.com
Command fail. Return code 1
```

To resolve the error in order to perform connectivity testing, the administrator would first configure FortiNDR with the IP addresses of DNS servers that are able to resolve the FQDN example.com.

execute update

Use this command to manually request updates or delete the downloaded cache files for updates to the FortiNDR ANN database and engine from FDS (FortiGuard Distribution Servers).

Syntax

```
execute update {now|clean-up}
```

execute vm license

In VM only, use this command to install license.

Syntax

```
execute vm license {disk|scp|ftp|tftp} <filename> <server>[:ftp port]
```

execute snifferd

Syntax

Use this command to enable or disable FortiNDR sniffer functionality.

```
execute snifferd {on|off}
```

execute ndrdr

Syntax

Use this command to enable or disable FortiNDR NDR functionality.

```
execute ndrdr {on|off}
```

execute file-size-threshold

Use this command to change FortiNDR's max file size limit for different daemons.

Syntax

```
execute file-size-threshold {ICAP|OFTP|inline-blocking|manual-upload|network-share|sniffer}
```

Variable	Description	Default
ICAP	Files sent from ICAP	
OFTP	OFTP Devices	
inline-blocking	Fabric Devices	
manual-upload	manual uploaded files	
network-share	Network share Scan	
sniffer	Network Traffic Sniffer	

execute cleanup

Use this command to clean up historical data to free disk space. Please use with caution since all historical data will be deleted.

Syntax

```
execute cleanup
```

execute backup config

Use this command to back up the configuration file.

Syntax

```
execute backup config {disk|scp|ftp|tftp} <filename-to-be-saved> <server>[:ftp port] <user-name> <password>
```

execute device

Use this command to add back a fabric device that has been removed before, or remove an existing fabric device from FortiNDR.

Syntax

```
execute device {add|remove} < Device type ID > <Serial> [VDOM]
```



www.fortinet.com

Copyright© 2022 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.