



FortiVoice - User Portal Guide

Version 6.4.0

FORTINET DOCUMENT LIBRARY

<https://docs.fortinet.com>

FORTINET VIDEO GUIDE

<https://video.fortinet.com>

FORTINET BLOG

<https://blog.fortinet.com>

CUSTOMER SERVICE & SUPPORT

<https://support.fortinet.com>

FORTINET TRAINING & CERTIFICATION PROGRAM

<https://www.fortinet.com/support-and-training/training.html>

NSE INSTITUTE

<https://training.fortinet.com>

FORTIGUARD CENTER

<https://fortiguard.com/>

END USER LICENSE AGREEMENT

<https://www.fortinet.com/doc/legal/EULA.pdf>

FEEDBACK

Email: techdoc@fortinet.com



December 8, 2020

FortiVoice 6.4.0 User Portal Guide

26-640-633864-20201208

TABLE OF CONTENTS

Change Log	5
Introduction	6
Logging in to the FortiVoice user portal	7
Call history	8
Viewing call details	8
Searching call records	8
Filtering call records	8
Saving all call records	8
Voicemail	10
Displaying your voicemails	10
Playing a voicemail	10
Deleting a voicemail	10
Sending a voicemail to another extension	10
Downloading a voicemail	11
Setting voicemail options	11
Contact	12
Calling a contact	12
Adding a contact	12
Editing a contact	12
Deleting a contact	12
Importing a list of contacts	13
Exporting a list of contacts	13
Updating a contact favorite list	13
Updating a contact speed dial list	13
Configuring a personal block list	14
Call handling	15
Quick setting	15
User's call handling	15
Quick call handling	17
Follow Me setting	17
Twinning setting	18
Customizing a sound file for an announcement	18
Call recording	20
Fax	21
Viewing a fax received on your extension	21
Sending a fax	21
Viewing a fax sent from your extension	21
Adding a fax cover page	22
Monitoring a fax extension	22
Conference	23

Reminder	25
Device	26
Programmable Key	27
Preferences	29
Operator console	32
Opening the operator console	32
Managing active calls	32
Making a call	33
Managing parked calls	33
Checking the directory	33
Managing hotel room status	33
Showing the Room Status widget	34
Editing the room settings	34
Setting up or editing a wake up call	34
Call center console	35
Logging in to the call center console	36
Logging in to a queue	36
Managing widgets	37
Widgets	38
Waiting Caller	38
Active Call	39
Recent Calls	43
Directory	44
Agent	45
Queue Stat Today	48
Queue Agent Summary	49
Queue Callback List	50
Service-level alerts	50
Monitor view	51
Accessing the Monitor view	51
Logging out of a queue	52
Logging out of the call center console	52

Change Log

Date	Change Description
2020-09-04	Initial release of the FortiVoice 6.4.0 User Portal Guide.
2020-12-08	<ul style="list-style-type: none">• Updated Call recording on page 20.• Updated Device on page 26.

Introduction

The FortiVoice user portal allows you to perform the following tasks:

- Check your call history for received, placed, or missed calls.
- Check your voicemail including playing, deleting, forwarding, or saving voicemails.
- Manage your business and personal contacts, and view the business and corporate phone directories.
- Manage how the phone system handles your phone calls.
- Check your recorded calls including playing, deleting, or saving the voicemails.
- Receive and send faxes.
- Set up reminder events and invite guests.
- Add conference call events in your calendar and invite attendees by email.
- View device details of desk phones and soft phones, and set up programmable keys.
- Configure your extension according to your preferences.
- Use the operator console to process organization calls.
- Use the call center console to process call queues.



Available functions may vary depending on the privileges assigned to your phone extension by your FortiVoice system administrator.

Logging in to the FortiVoice user portal

Use this procedure to log in to the FortiVoice user portal.

Prerequisites

- Ask your FortiVoice system administrator for the IP address of the FortiVoice phone system that is managing your extension.
- Know your phone extension on the FortiVoice phone system and user password for web access.
- Use of the recommended web browsers. For details, see the [FortiVoice Phone System Release Notes](#).

Procedure steps

1. Open a web browser and go to `https://<IP_address_or_FQDN>/voice`.
Where <IP_address_or_FQDN> is the IP address or the FQDN of the FortiVoice phone system.
If the FortiVoice system administrator has changed the access port, then you must also include the port, for example: `https://<IP_address_or_FQDN>:446/voice`.
2. In **Extension**, enter your extension.
3. In **Password**, enter the user password for your extension.
4. Click **Login**.
The main page of the FortiVoice user portal appears.
The widget selection may vary depending on the privileges that the FortiVoice system administrator has assigned to your extension.

Call history


The **Call History** menu displays all incoming and outgoing calls made to and from your extension. Your phone call records include the following details:

- Caller and receiver
- Time of the call
- Call duration
- Call status or disposition
- Call direction
- Call type

Viewing call details

1. In the call history list, double-click on an entry.
2. You can view details in the following sections:
 - Call information
 - Detail information
 - Call flow

Searching call records

1. In **Call History**, click the **Search** button .
2. Enter a search string and press Enter.

Filtering call records

You can apply additional filtering by selecting options available under the **Direction** and **Disposition** drop-down menus.

Saving all call records

1. In **Call History**, click **Download**.
2. Select **All**.

3. Depending on your web browser settings, the CSV file may download automatically or you can take action to save the file.

Voicemail


The **Voicemail** menu allows you to manage your voicemails.

Displaying your voicemails


Use this procedure to display your voicemails including urgent and old ones.

1. Go to **Voicemail**.
2. From the drop-down menu, select one of the following filter choices:
 - **All**: Shows all voicemails for your extension.
 - **Inbox**: Shows new voicemails. After you listen to a voicemail, the system moves the voicemail to the **Old** list.
 - **Urgent**: Shows voicemails marked as urgent by the caller.
 - **Old**: Shows voicemails that you have already listened to.

Playing a voicemail


1. Go to **Voicemail**.
2. In the list, locate the voicemail that you want to listen to.
3. Click **Play** .

Deleting a voicemail


1. Go to **Voicemail**.
2. In the list, locate the voicemail that you want to delete.
3. At the beginning of the row, select the checkbox for that voicemail.
4. Click  **Delete**.

Sending a voicemail to another extension


1. Go to **Voicemail**.
2. In the list, locate the voicemail that you want to forward to another extension.
3. At the beginning of the row, select the checkbox for that voicemail.

4. Click  .
5. In **Forward to**, select the extension.
6. Click **OK**.

Downloading a voicemail

1. Go to **Voicemail**.
2. In the list, locate the voicemail that you want to download.
3. At the beginning of the row, select the checkbox for that voicemail.
4. Click  .
5. To confirm the download of the WAV file, click **OK**.

Setting voicemail options

1. Go to **Voicemail**.
2. Click  .
3. Configure the following fields:

GUI field	Description
Voicemail handling	Enable to allow a caller to press 0 to talk to the operator during an announcement.
Name	<ul style="list-style-type: none"> Set to Standard to use the system default name for the voicemail (the extension number), or set to Personal to use your own name for the voicemail. If you select Personal, click Call me to record your own message using the phone, or click Upload to import a pre-existing sound file. Uploaded sound files must be WAVE files in mono 16bit PCM (8000Hz) compression format.
Greeting	<p>Select the voicemail greeting mode and greeting content. Click Audio file to record or import a sound file for various scenarios, depending upon the greeting type selected:</p> <ul style="list-style-type: none"> Standard: The default system defined greeting. Simple: The greeting that applies to any time. Scheduled: The greeting that comes with a schedule. Click New to add a system Schedule and assign a Greeting. Conditional: The greeting that applies when you are either busy or unavailable.

4. Click **OK**.

Contact

The **Contact** menu displays all of the extensions in your organization, including the extension number, display name on the phone, location of the extension, and the extension type.

You can filter contacts by **Personal Contact**, **Business Contact**, or **Directory** from the top drop-down menu.

You can sort the **Personal Contact** list, by using the following filters:

- **Sort By**: Allows you to show contacts by display name or main number.
- **Category**: Allows you to show contacts for speed dial, favorite, or all.

You can update the **Personal Contact** list but the FortiVoice system administrator manages the **Business Contact** and **Directory** lists.

Calling a contact


To call an extension, initiate the click to dial by clicking the phone icon  next to the extension number.

Adding a contact


Use this procedure to add a contact to **Personal Contact**.

1. Click .
2. Fill in the fields.
3. Click **Create**.

Editing a contact


To edit a contact in **Personal Contact**, select the checkbox at the beginning of the row for that contact, and then click .

Deleting a contact

To delete a contact from **Personal Contact**, select the checkbox at the beginning of the row for that contact, and then click .


Importing a list of contacts

Use this procedure to import contacts from a file with data represented in a comma-delimited format also referred to as comma-separated values (CSV) in **Personal Contact**.

1. Click  and select **Import**.
2. Find the CSV file to import and click **Open**.



Exporting a list of contacts

Use this procedure to export contacts from **Personal Contact** to a CSV file.

1. Click  and select **Export**.
2. Depending on your web browser settings, the CSV file may download automatically or you can take action to save the file.


Updating a contact favorite list

Use this procedure to add or delete a contact from your favorite list.

1. Go to **Contact > Personal Contact**.
2. To add a contact to a favorite list, click the star icon  next to the display name.
3. To remove a contact from a favorite list, click the star icon  next to the display name.

Updating a contact speed dial list

You can associate a phone number with a key pad number and create a contact speed dial list. Use this procedure to add or delete a number from a speed dial list.

1. Go to **Contact > Personal Contact**.
2. Next to the contact's number, click the down arrow .
3. To add a number to the speed dial list:
 - a. Select **Add to Speed Dial**.
 - b. To associate the phone number with a key pad number, click a number in the list.
 - c. Click **OK**.
4. To remove a number from the speed dial list, select **Remove from Speed Dial**.


Configuring a personal block list

Use this procedure to maintain a phone number block list to prevent those defined numbers from calling your extension.

To block a phone number (not included in the personal contact list)

1. Go to **Contact > Personal Contact** and click **Personal Block List**.
2. Click **New**.
3. Enter a **Number**, and optionally a **Display name** and **Description**.
4. Click **Create**.
5. To finish configuring your block list, click **Close**.

To block a phone number (included in the personal contact list)

1. Go to **Contact > Personal Contact**.
2. In the main number list, locate the number that you want to block.
3. Next to the contact's number, click the down arrow .
4. Select **Add to Block List**.
5. Optionally, add a **Description**.
6. To confirm, click **OK**.

Call handling

The **Call Handling** menu allows you to manage the call process. For example, you can configure the process to forward a call to another number on a specific schedule.

Quick setting

To enable the Do not disturb setting

1. Go to **Call Handling**.
2. Under **Quick setting**, set **Do not disturb** to **ON**.

To enable the Call forward setting

1. Go to **Call Handling**.
2. Under **Quick setting**, set **Call forward** to **ON**.
3. In the field provided, enter the telephone number to forward the calls.

User's call handling

To manage a call

1. Go to **Call Handling**.
2. Under **User's call handling**, select a call status from the drop-down menu. Your choices are:
 - Normal
 - No answer
 - Busy
 - Do not disturb
 - Phone not connected
 - Block list
 - Voicemail

Each status can only be used for one call management configuration.

If you select **Block list**, the call management configuration will apply to the numbers added in the **Personal Block List** configuration. See [Configuring a personal block list on page 14](#).

3. Set **Call Process** to either **System default action** or **User defined**.
The **System default action** changes depending on the status selected. As shown in the example, a **Normal** status means the system default action is **Ring Phone**.

User's call handling ▾

Configure how to handle calls when in status: Normal ▾

Call Process

☒ System default action (Ring Phone)
☐ User defined

+ New... Edit... Move ▾ Delete

Schedule	Call from	Action	Info
----------	-----------	--------	------

4. If you selected **User defined**, click **New** to define a call process according to a schedule.
 - Select a default **Schedule** for the call action. Once a schedule is assigned, you can click **View** to display the schedule details.
 - Select whether this call process applies to **Internal**, **External**, and/or **Office peer** calls.
 - Select an **Action** for the call process. Multiple user defined call process actions can be defined to process a call in a specific sequence. For example, you can create one call process with a **Play announcement** action, followed by another with an **Auto attendant** action.

The **Default action** is the same as the system default action, determined by the call handling status.

 - If you select **Follow me**, select a follow me profile. For information on configuring follow me, see [Follow Me setting on page 17](#).
 This option is only available if your administrator enables call forwarding in your extension's user privilege.
 - If you select **Play announcement**, select a sound file. For information on configuring sound files, see [Customizing a sound file for an announcement on page 18](#).
 - If you select **Auto attendant**, select a default auto attendant.
 - If you select **Forward**, enter the number to which you want to forward the call. This option is available only if your administrator enables call forwarding in your extension's user privilege.
 - Click **OK**.
5. Your call process actions are shown. If necessary, you can change the order of the actions by selecting an action's checkbox and clicking **Move > Up** or **Move > Down**.

Call Process

☐ System default action (Ring Phone)
 ☒ User defined

+ New...

Edit...

↑ Move

↓

Delete

☐ Schedule

↑ Up

↓ Down

		Action	Info
<input checked="" type="checkbox"/>	business_hour	Internal,Trunk,Office peer	Play announcement welcome_default
<input type="checkbox"/>	business_hour	Internal,Trunk,Office peer	Auto attendant auto_attendant_default

6. Click **OK**.

Quick call handling

Use Quick call handling to change your call handling settings temporarily while leaving your regular call handling settings unchanged. The quick call handling settings are tied to the settings under **Preferences > Quick Mode** (see [Preferences on page 29](#)).

You can manage Quick call handling by dialing a code to enter into a default mode and configure the call process for when your status is either **Out of office** or **Away**, or for another reason (**Other**).

To configure Quick call handling

- Go to **Call Handling**.
- Under **Quick call handling**, select a call status from the drop-down menu. Each status can only be used for one call management configuration.
- Under **Call Process**, click **New** to define a call process according to a schedule.
 - Select a default **Schedule** for the call action. Once a schedule is assigned, you can click **View** to display the schedule details.
 - Select whether this call process applies to **Internal**, **External**, and/or **Office peer** calls.
 - Select an **Action** for the call process. Multiple call process actions can be defined to process a call in a specific sequence.
 - Click **OK**.
- Click **OK**.

Follow Me setting

This feature allows a call to your extension to be transferred to another destination when you are not available.

To configure follow me

1. Go to **Call Handling**.
2. Under **Follow Me Setting**, click **New**.
3. Enter a **Name**.
4. Under **Follow Me Numbers**, click **New** to enter a phone number to which the call to your extension can be transferred.
Additionally, define the **Ring duration** in seconds. This setting defines how long to ring the Follow Me number before following the No Answer call handling setting of the extension. Click **OK**.
5. Click **OK**.
Repeat the steps to add more numbers if you want to transfer a follow me call to multiple numbers in a sequence. The numbers will be dialed according to the sequence in the follow me setting.
6. To save **Call Handling** changes, click **OK**.

Twinning setting



This option is only available if the FortiVoice system administrator has selected Twinning in a profile under Phone System > Profile > User Privilege and applied that user privilege profile to your extension.

Set to **Disabled**, or **Simple** or **Scheduled** to allow an external telephone (cell phone or home phone) to replicate your internal office extension.

- **Disabled**: Select to disable twinning.
- **Simple**: Select to configure basic twinning by adding a phone number.
- **Scheduled**: Select to configure twinning by adding phone numbers based on a schedule or multiple schedules (three maximum).

Customizing a sound file for an announcement

When configuring user-defined **Call Process** settings under **Call Handling**, you have the option to set the **Action** to **Play announcement**. You must then assign a sound file to play, or create one.

For more details about the call process configuration, see [Call handling on page 15](#).

To customize a sound file

1. Go to either **Call Handling > User's call handling** or **Call Handling > Quick call handling**.
Quick call handling is used to determine the call process for when your status is either **Out of office** or **Away**, or for another reason (**Other**).
2. In **Call Process**, click **New**.
3. Assign a **Schedule** as necessary, and determine whether this call process applies to **Internal**, **External**, and/or **Office peer** calls.

4. Set **Action** to **Play announcement**.

A **Sound file** drop-down menu appears.

5. Click **New** (the plus + icon) next to the drop-down menu.

6. Enter a **Name** for the sound file.

7. To record your own announcement:

a. Set **Action** to **Call me**.

A message appears stating that a voice recording request (or call) has been sent to your extension.

b. Answer the call and record your announcement using the phone. Click **Yes** when you have finished recording your announcement.

c. Click **Close**.

8. To import a preexisting audio file:

a. Set **Action** to **Upload**.

b. Locate and select the WAVE file.

c. Click **Open**.

d. Click **Close**, and click **OK** to finish the call process configuration.

9. To finish the call process configuration, click **OK**.

Call recording

The **Call Recording** menu displays all your recorded calls.

FortiVoice allows you to record phone calls to have a permanent record of particularly important phone calls.



FortiVoice supports two types of recordings:

- **Personal recording:** You can access your phone call recordings from the FortiVoice user portal.
 - **System recording:** With the administrator privilege, you can access phone call recordings from the FortiVoice web-based manager. For more details about this recording type, see the Call recording section in the [FortiVoice Cookbook](#).
-

Prerequisites

- **To record a phone call:** Make sure that the FortiVoice system administrator applies a user privilege, with the monitor/recording, personal recording option enabled, to your extension.
- **To access a phone call recording:** Make sure that the FortiVoice system administrator applies a user privilege, with the user portal, call recording option enabled, to your extension.


To record a phone call



Before recording a phone call, have the agreement of the person you are talking with or check your local laws regarding phone recording.

1. During a phone call, start the personal recording by pressing *30.
The recording continues until you hang up.

To manage recorded phone calls

1. Go to **Call Recording**.
2. Select a recorded call.
3. Perform one of the following actions:
 - To listen to the recorded phone call, click .
 - To remove the recorded phone call, click **Delete**.
 - To confirm the deletion, click **Yes**.
 - To send the recorded phone call to another extension, click **Forward**.
 - Select the extension and click **OK**.
 - To save the recorded phone call (WAV file format), click **Download**.
 - Select to save the file and click **OK**.

Fax

The **Fax** menu allows you to send and receive faxes. If your administrator enables you to monitor a fax extension, you can also manage all of the faxes received on that fax extension.

Viewing a fax received on your extension

1. Go to **Fax > Inbox**.
2. Locate the row for the fax that you want to view.
3. Go to the **Download** column and click the link.

Sending a fax

1. Go to **Fax > Sent** or **Fax > Inbox**.
2. Click **New**.
3. Configure the following fields:

GUI field	Description
To	Enter the fax number to which you want to send the fax.
Attach cover sheet	Select a cover sheet. For details, see Adding a fax cover page on page 22 .
Attachment (PDF and JPEG only)	Click the plus (+) icon to locate the fax that you want to send as either a PDF or JPEG attachment.
Advanced	
Fax header	Enter the fax header such as the receiver's name, subject, or number of pages.
Station ID	Enter a station ID that shows on each fax sent from the FortiVoice unit.

4. Click **Send**.

Viewing a fax sent from your extension

1. Go to **Fax > Sent**.
2. Locate the row for the fax that you want to view.
3. Go to the **Download** column and click the link.

Adding a fax cover page



The supported file types for a fax cover page are:

- JPEG
- PDF
 - If you are using a PDF file as a fax cover page, make sure that the file is one page.
- PNG

The file size can be 200 MB or less.

1. Go to **Fax > Cover Page**.
2. Click **New**.
3. Add a **Name**.
4. Optionally, add a **Description**.
5. Click **Upload**.
6. Locate and select the file.
7. Click **Open**.
8. Click **OK**.

Monitoring a fax extension

1. If the FortiVoice system administrator has enabled you to monitor incoming faxes on a fax extension, go to **Fax > Monitor**.
2. In **eFax Account**, select the fax receiving account.
3. Locate the row of the fax that you want to view, delete, resend, or forward.
4. To view a fax, go to the **Download** column and click the link.
5. To delete the fax, select the checkbox at the beginning of that row and click **Delete**.
6. To resend the fax, select the checkbox at the beginning of that row and click **Resend**.
7. To forward the fax, select the checkbox at the beginning of that row and click **Forward**.

Conference


You can add a conference call event in your calendar and invite attendees by email.



To have access to **Conference**, the FortiVoice system administrator must update the FortiVoice phone system to give you the privilege to organize conference calls by adding your extension in Call Feature > Conferencing > User Conferencing.

To add a conference call event

- 1. Go to **Conference**.
- 2. In the calendar, click a date.
- 3. Complete the following fields:

GUI field	Description
Title	Add a title for the conference call event.
Conference ID	The ID associated with the conference call. The FortiVoice system administrator defines this ID. This field is read-only.
Attendee PIN	The PIN that an attendee must enter to join the conference call. You can use the one generated by the system or change it.
Organizer PIN	The PIN that you must enter to host a conference call. Use the suggested PIN or specify your own code.
Description	Optionally, add details about this conference call event.
Location	Optionally, add information about the location of this conference call event.
Start time	<div> Both start and end times use the time zone setting available in Preferences > Display Preference.</div> <div>Select the time for the conference call event to start. If the event will last all day, do not select a start time but enable All day event below.</div>
End time	Select the time for the conference call event to end. If the event will last all day, do not select an end time but enable All day event below.
All day event	Enable if the duration of the conference call will be an entire day.
Recurrence	If you want the conference call event to be on a repeating schedule, click None , update the recurrence settings, and click OK .

GUI field	Description
Attendee	Click Add Attendee , add the attendee details, and click Create . Repeat for every attendee.

- To save the conference call event, click **OK**.

Example of an email received by an invited attendee

Juliet [redacted] has invited you to a Conference Call - Marketing meeting	
Subject:	Marketing meeting
Organizer:	Juliet [redacted] - [redacted]@gmail.com'
When:	Thu Jun 04 2020 06:30
Location:	Ottawa
Conference ID:	903903
Conference PIN:	193311
Access:	Please dial ext 7501 to attend this conference.
Attendees:	Nathalie - [redacted]@fortinet.com'
Description:	New phone models

Attending? [Accept](#) - [Tentative](#) - [Reject](#)


To set conferencing options

- Go to **Conference**.
- Click **Conferencing Options**.
- You can perform the following tasks:
 - To record your own conference announcement using the phone, click **Call me**.
 - To import a pre-existing sound file, click **Upload**. Uploaded sound files must be WAVE files in mono 16 bit PCM (8000 Hz) compression format.
 - To play an uploaded sound file, click **Play**.
 - To erase an uploaded sound file, click **Erase**.
 - To download an uploaded sound file, click **Download**.

Reminder

The **Reminder** menu allows you to add a reminder event in your calendar and set the extensions to which you want to send the event reminder calls.

1. Go to **Reminder**.
2. In the calendar, click a date.
3. Complete the following fields:

GUI field	Description
Title	Add a name for the reminder event.
Description	Optionally, add a description for the reminder event.
Location	Optionally, add a location for the reminder event.
Start time	<div><p>The start time uses the time zone setting available in Preferences > Display Preference.</p></div> <hr/> <p>Specify when the reminder event starts.</p>
Recurrence	If you want the reminder event to be on a repeating schedule, click None , update the settings, and click OK .
Guest	Select the internal and external phone numbers to which you want to send the event reminder call.
Reminder audio	<p>To send a reminder audio to the selected guest phones, select one of the following options:</p> <ul style="list-style-type: none">• Default: Select to send a beep sound as the reminder audio. To hear the beep sound, click Play, and save the GSM file.• Customized: Select to customize the reminder audio.<ol style="list-style-type: none">a. Click Create New.b. You have two options to create a customized message:<ul style="list-style-type: none">• Option 1: Select an extension and click Call me. You can then follow the prompts to create a new message.• Option 2: To upload a message that you have already recorded, click Upload. Make sure that the file meets the following requirements: 8bit, 8Khz, mono, and WAV file format.c. Click Close.

4. To save the reminder event, click **OK**.

Device

The **Device** menu allows you to perform the following tasks:



The FortiVoice user portal only shows the **Programmable Key** menu, if you are using a FortiFone device that supports programmable keys.

- Assign programmable keys (see [Programmable Key on page 27](#)).
- View details about desk phones registered with your extension:
 - Phone model
 - MAC address
 - IP address
 - Phone information
 - Registry time
 - Expiry time
- View details about soft phones registered with your extension:
 - Extension number
 - Client version
 - Phone information
 - OS platform
 - OS version
 - Revoke
 - View mobile login information.
 - Access to the QR code that you can scan with your mobile device camera to automatically configure the FortiFone softclient. For more details about how to scan the QR code, see the [FortiFone Softclient User Guide \(for Android, iOS, or Desktop\)](#).
 - View desktop login information.

Programmable Key



The FortiVoice user portal only shows the **Programmable Key** menu, if you are using a FortiFone device that supports programmable keys.

The **Programmable Key** menu allows you to program phone keys for specific functions and easier call control.

Your FortiVoice system administrator can define keys as admin-assigned (Phone System > Profile > Programmable Keys). You cannot customize these keys. However, your FortiVoice system administrator can also define other keys as user-assigned, allowing you to program them yourself from the user portal.



Keys 1 and 2 are reserved by default and you cannot edit them. Your FortiVoice system administrator may choose to reserve up to the first four lines.

To set programmable keys

1. Go to **Device > Programmable Key**.

In the list, you can see which keys are reserved, admin-assigned, and user-assigned.

In the following example, the user has one **Page** of keys. Lines 1 and 2 are designated as **Reserved**. The remaining keys are designated as **User Assigned**. If necessary, contact your administrator to get more user assigned keys, which would then be configured under **Page 2** and **Page 3**.

Set Programmable Phone Key

Page 1 ▾

Option:	Function	Resource	Label
1.	Reserved	Reserved	Reserved
2.	Reserved	Reserved	Reserved
3.	Extension appearance ▾	600 (600D) ▾	Lab
4.	Line appearance ▾	five126 (1) ▾	home
5.	Reserved for line ▾	Account 1 ▾	
6.	Intercom ▾		
7.	--User Assigned-- ▾		
8.	--User Assigned-- ▾		
9.	--User Assigned-- ▾		
10.	--User Assigned-- ▾		
11.	--User Assigned-- ▾		
12.	--User Assigned-- ▾		
13.	--User Assigned-- ▾		
14.	--User Assigned-- ▾		
15.	--User Assigned-- ▾		
16.	--User Assigned-- ▾		
17.	--User Assigned-- ▾		
18.	--User Assigned-- ▾		

✓ OK

✗ Cancel

2. For each **User Assigned** key, complete the following fields:

- In **Function**, select the type of action to occur when you press the programmable key.
- In **Resource**, select the result of the selected function. For example, if you select *Extension appearance* as the function, then you can choose which extension to monitor as the resource.
- In **Label**, enter a name that will appear beside the programmable key on the FortiFone device.



3. Click **OK**.

Preferences

The **Preferences** menu allows you to customize extension settings, including basic user settings, display preferences, incoming call options, quick mode codes, and notification and voicemail options.

To set extension preferences

1. Go to **Preferences**.
2. Configure the following fields:

GUI field	Description
User Setting	
Number	Displays your extension number (read-only).
Display name	Displays the caller ID on the extension, usually the name of the extension user (read-only).
Emergency caller ID	Displays the caller ID to display on the destination phone when the emergency number is dialed (read-only).
External caller ID	Displays a particular caller ID on a called phone instead of the FortiVoice main number or the trunk phone number (read-only). Use the <code>name<phone_number></code> format, such as <code>jdoe<2221111234></code> . If you are unsure about this feature, contact your administrator for more information.
Idle timeout	Enter the duration of time in minutes before you are logged out of the user portal. Set the value between 1 and 1440 (maximum of one day).
Picture ID	<p>You can upload a picture ID file. When you place a call, the callee's phone displays the uploaded picture ID, if the phone model supports this feature. Before uploading a picture file, make sure that the file meets the following requirements:</p> <ul style="list-style-type: none">• Supported formats: JPEG and PNG• Width and height ratio: between 0.85 and 1.2• File size: 5 MB or less <p>To upload a picture, click .</p> <p>To delete a picture, click .</p>
Change PIN number	Click to enter and confirm a new PIN for accessing your voicemail. You must enter your current PIN before choosing a new PIN.
Change User Password	Click to enter and confirm a new user password for accessing the user portal. You must enter your current password before choosing a new password.
Display Preference	

GUI field	Description
Default portal	Set the default portal to open when you log in: User portal (by default), Operator console , or Call center console . For more information about the different consoles, see Call center console on page 35 and Operator console on page 32 .
Phone language	Set the phone language for the extension.
Web language	Set the user portal language (English by default).
Theme	Set the display color theme for the user portal (Green by default).
Time zone	Set the time zone for the user portal (GMT -8:00 Pacific Time US & Canada by default).
Programmable Key	For details, see Programmable Key on page 27 .
Incoming Calls	
Retain original caller ID	Enable to display the original caller's number of an incoming call.
Call screening	Enable to request callers to state who they are and why there are calling when receiving an incoming call, allowing you to safely answer expected calls or cancel unwanted and spam calls.
Record caller name	Enable to record the names of incoming callers.
Ring duration	Specify the duration of time in seconds that incoming calls will ring for before going to voicemail.
Call waiting	Enable to allow you to answer an incoming call while on another call.
Quick Mode	
Effective mode	<p>With this temporary setting, you configure a secondary set of call handling rules that do not affect your regular call handling settings. You can configure this setting so calls can automatically follow regular call handling.</p> <p>Use this section to define convenient quick mode schedule settings. Click any of the three modes to define their respective option (and time duration or time of day, if applicable):</p> <ul style="list-style-type: none"> To enable the Out of office schedule, dial *721. To enable the Away schedule, dial *722. To enable the Other schedule, dial *723. To cancel quick mode and revert the system to its regular schedule, dial *720.
Notification Options	
Voicemail	<p>Select the email notification option to use when this extension receives a voicemail:</p> <ul style="list-style-type: none"> None: Do not send a notification. Simple: Send an email notification. With attachment: Send an email notification with the voicemail attached.

GUI field	Description
Fax	<p>Select the type of email notification option to use when this extension receives a fax:</p> <ul style="list-style-type: none"> • None: Do not send a notification. • Simple: Send an email notification. • With attachment: Send an email notification with the fax attached.
Missed call	Enable to send an email notification when you miss an incoming call.
Email address	Enter the email address(es) to which you would like email notifications for voicemails, faxes, and missed calls to be sent.

3. When you have finished customizing your preferences, click **OK**.

Operator console




To have access to the **Operator console**, the FortiVoice system administrator must update the user privilege profile assigned to your extension to enable the operator role (Phone System > Profile > User Privilege).

To manage the status of hotel rooms, the FortiVoice system administrator must update the user privilege profile assigned to your extension to enable the hotel room option under the operator role.

In the **Operator console**, you can perform the following tasks:


- Process phone calls on the web as your organization's phone operator.
- Manage the status of hotel rooms.

Opening the operator console

To open the **Operator console**, go to the top of the user portal window and click **Operator console** .

Managing active calls

When an active call appears in the **Active Call** widget, you can select the call and click one of the following icons:




- Pick up the call
- Hang up the call
- Transfer the call by dragging and dropping it to an extension (or the voicemail of an extension) in **Idle**, **In Use**, **Busy**, **Ringing**, or **On Hold** status in the **Directory** widget.
- Park the call
- Hold the call

In the **Active Call** widget, you can filter the calls by category, direction, and status. The **Call** filter has the following options:

- **All**: Displays all phone calls.
- **Short**: Displays ringing calls and calls to and from the operator extension.
- **Mine**: Displays calls to and from the operator extension.

Making a call


If you need to make a call as your organization's phone operator using the operator console, then you can do one of the following actions:

- Right-click an extension from the **Directory** widget and click **Call**.
- Click **Call**  and either enter or select an extension to call.

The **Active Call** widget shows the extension that you are calling.

Managing parked calls

Here is how the **Parked Call** widget works:

1. An extension parks a call on the system.
2. The call appears in the **Parked Call** widget of the operator console.
3. In the list of the **Parked Call** widget, one of the users of the operator console can then select the call, and click **Unpark**. The phone of that operator console user rings with the parked call.
4. To refresh the list of parked call, click Refresh .

Checking the directory

The **Directory** widget lists the extensions for your organization. You can filter the extensions by user, group, conference, location, and type.

Managing hotel room status



Prior to accessing the Room Status widget, make sure that the FortiVoice system administrator performs the following tasks on the FortiVoice phone system:

- Load the hotel management license.
- Configure the hotel management settings. For details, see the Working with Property Management System section in the [FortiVoice Phone System Administration Guide](#).
- Set the user privilege of your extension with the Operator Role - Hotel room active.

The Room Status widget shows the hotel room status which is related to the information available or updated on the FortiVoice phone system under Hotel Management > Room Status.

The Room Status widget uses dots with the following colors:

- Red - Shows that the status is disabled.
- Green - Shows that the status is enabled.

Showing the Room Status widget

If the Room Status widget is not visible, then perform this procedure to show this widget:

1. Click **Setting**.




2. Go to **Add Content > Room Status**.

Editing the room settings

1. Go to the row of the room that you want to edit.
2. In the first column, select the check box.
3. Click **Edit**.
4. Edit the settings, as required.
5. Click **OK**.

Setting up or editing a wake up call

1. Go to the row for the room that wants a wake up call.
2. In the **Wake Up** column, click wake up .
3. To create a new wake up call, click **New**.
To edit a wake up call, locate and expand the date in the Agenda list, and click on the wake up entry.
4. Edit the fields, as required.
5. Click **Create** or **OK**, as applicable.

Call center console

The call center console offers your organization an efficient way to receive, answer, and organize a large volume of phone calls.



To have access to the call center console, the FortiVoice system administrator must:

- Load the FortiVoice Call Center license on the FortiVoice phone system.
 - Complete the call center setup. For details, see the [Setting up a call center](#) section in the [FortiVoice Phone System Administration Guide](#).
 - Enable and set up the call center option for your extension.
-

Depending on your agent or manager profile, you can perform the following functions:

- Pick up a waiting call.
- Transfer a waiting call to an extension.
- Adjust caller priorities in a queue.
- Pause and resume your agent status with reason codes.
- Manage agents (coach, listen, log in, log out, and pause and resume agent statuses with reason codes).
- Initiate a callback.
- Monitor agent and queues status' in real time.
- Receive alerts by email, phone call, or pop-up window of prolonged waiting callers, too many callers (queue overflow) for the number of available agents.
- View call and agent details.
- View agent and queue statistics.


This section includes the following topics:

- [Logging in to the call center console on page 36](#)
- [Logging in to a queue on page 36](#)
- [Managing widgets on page 37](#)
- [Widgets on page 38](#)
- [Service-level alerts on page 50](#)
- [Monitor view on page 51](#)
- [Logging out of a queue on page 52](#)
- [Logging out of the call center console on page 52](#)

Logging in to the call center console

1. To log in to the call center console, use one of the following two methods:

- **Using the FortiVoice user portal:** When logged in to the portal, click **Call center console** .

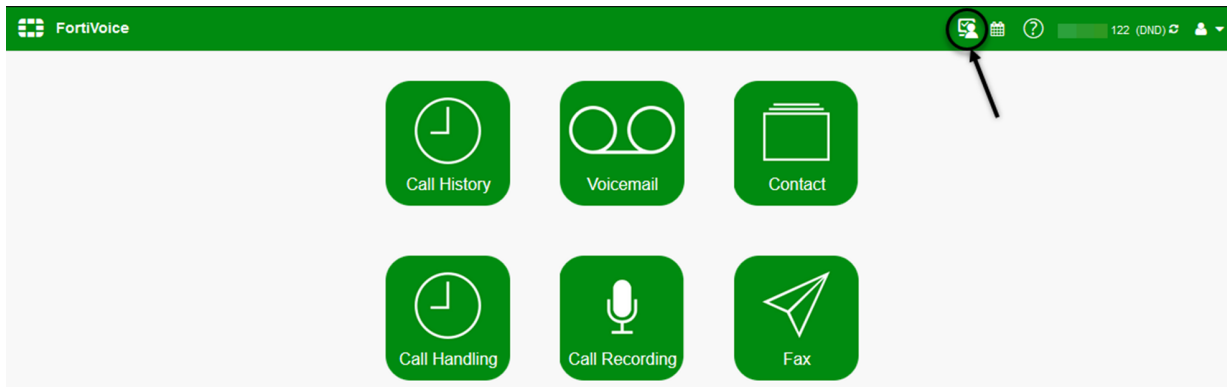

- **Using the direct access to the call center console:**

i. In a web browser, go to the following URL:

`https://<IP_address_or_FQDN>/agent`


Where <IP_address_or_FQDN> is the IP address or FQDN of the FortiVoice phone system.

If the FortiVoice system administrator has changed the access port, then you must also include the port, for example:

`https://<IP_address_or_FQDN>:446/agent`

- ii. Enter your extension and password.
- iii. Click **Login**.

Logging in to a queue

1. To log in to a queue, click  Queue Login.



2. Select queue(s) from the list.


3. In **Main/Outgoing queue**, select a queue to specify the following behaviors:

- **Main:** When you are a member of multiple queues, this selection addresses how calls are distributed to you. The queue you select is the one that rings your extension, if there is a possibility of multiple calls offered by

multiple queues.


- **Outgoing:** This queue is your default call queue used to track outbound calls such as taking a call from callback or returning a call. When the manager generates a queue report, the report includes outbound calls associated with the Main/Outgoing queue that you selected.

4. Click **OK**.

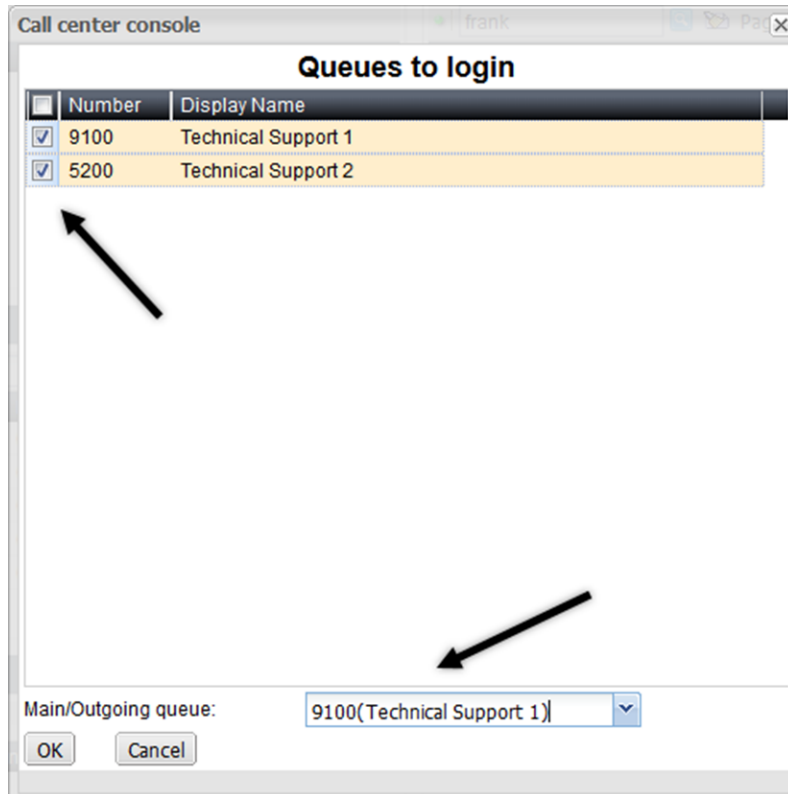

5. When you are logged in to the queue, you can see the following UI changes:

- The **Pause/Resume** icon is available instead of grayed out.
- The **Agent** icon is green.

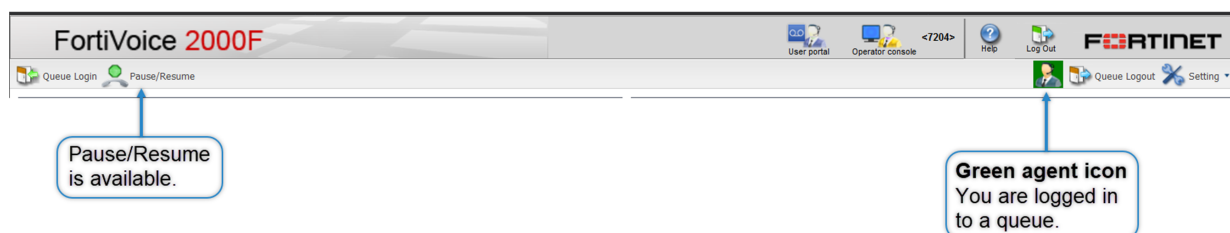


Managing widgets

You can manage widgets to perform the following tasks:

- Minimize, maximize, refresh, close, and add widgets.
- Arrange the position of widgets in the call center console window.

- Search for content in a widget.
- Check the connection of a widget to the server.

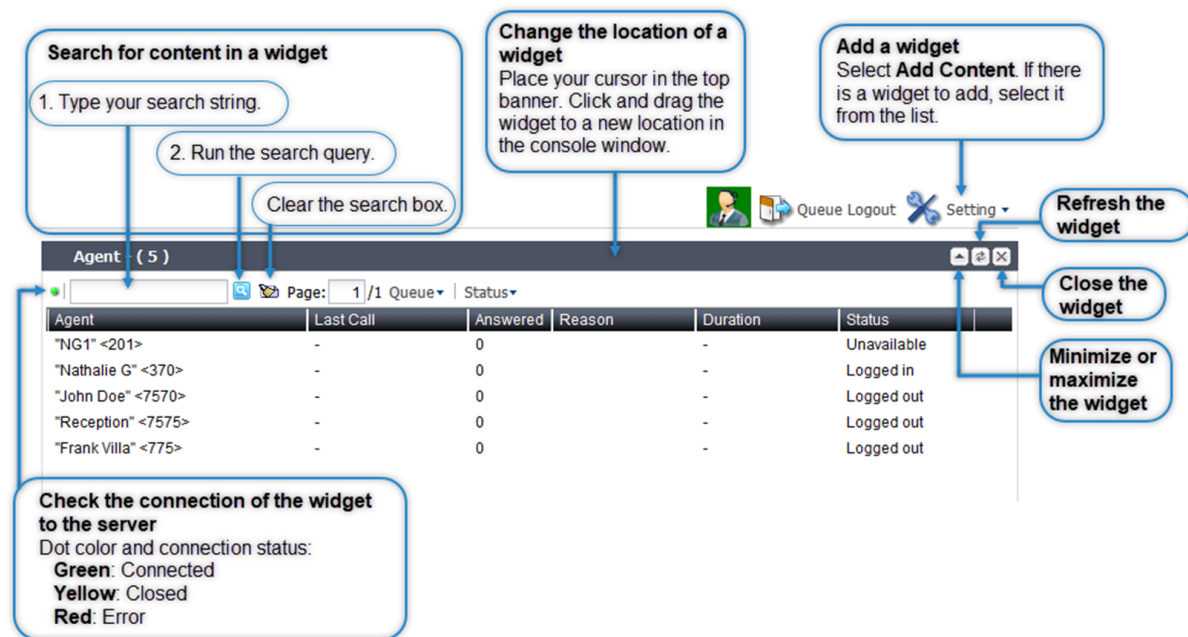

Widgets

Depending on your agent or manager profile, the call center console can display the following widgets:

- [Waiting Caller on page 38](#)
- [Active Call on page 39](#)
- [Recent Calls on page 43](#)
- [Directory on page 44](#)
- [Agent on page 45](#)
- [Queue Stat Today on page 48](#)
- [Queue Agent Summary on page 49](#)
- [Queue Callback List on page 50](#)


Waiting Caller

The **Waiting Caller** widget shows calls that are in a queue and waiting to be answered.


Depending on your profile, the **Waiting Caller** widget allows you to perform the following tasks:

- Filter callers by queue.
- Pick up the call of a selected caller.
- Transfer a call to another extension.
- Change the priority of a call.

Waiting Caller (agent profile view)

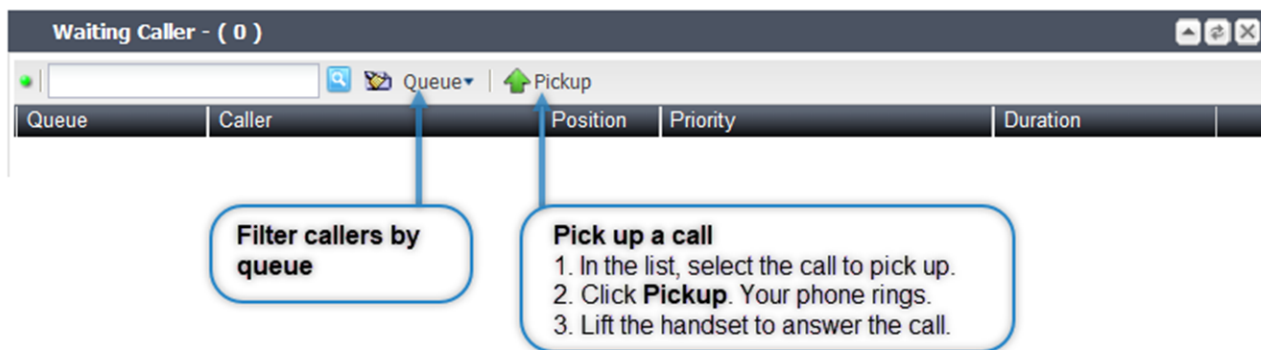

Waiting Caller (manager profile view)

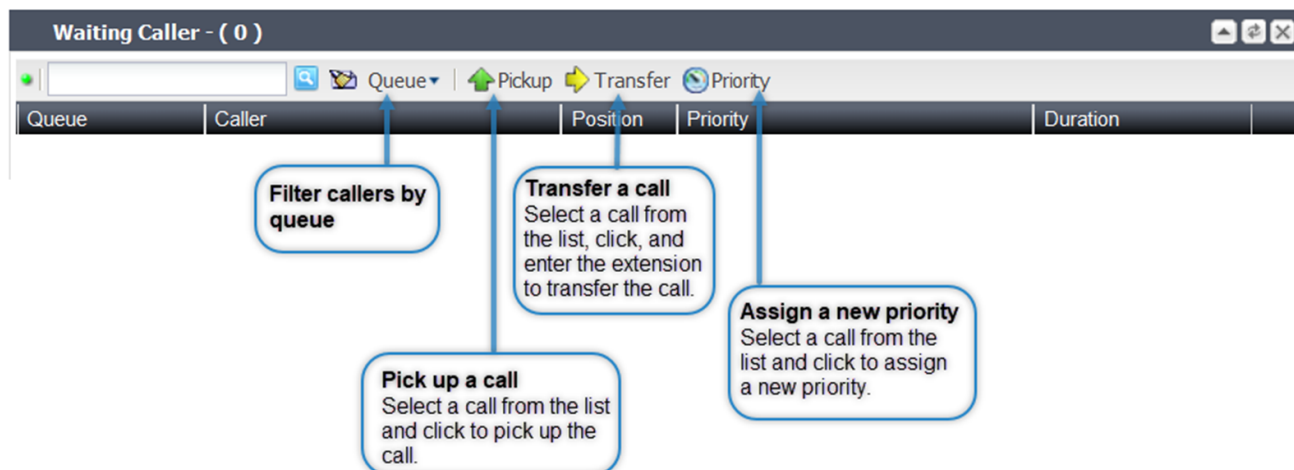

Active Call

The **Active Call** widget displays all ongoing phone calls in real time.

Active Call (agent profile view)

Filter call list

- **All:** Queued calls and answered calls.
- **Short:** Queued calls and calls that you have answered on your extension.
- **Mine:** Calls that you have answered on your extension only.

Filter active calls by status
Select all, ringing, answered, connected, voicemail, or on hold.

Filter active calls by direction
Select internal, outgoing, or incoming.

From	To	Status	Duration	Owner	Trunk
Fortinet Techno 161...	9100	Ringing	00:00:16	Q: "9100" <9100>	

Active Call (manager profile view)

Filter call list

- **All:** Queued calls and answered calls.
- **Short:** Queued calls and calls that you have answered on your extension.
- **Mine:** Calls that you have answered on your extension only.

Filter active calls by status

Select all, ringing, answered, connected, voicemail, or on hold.

Monitor call

Select a call from the list and then click to select one option:

- **Coach:** To speak to the agent only while the agent is on the call.
- **Listen:** To listen to a call.

Filter active calls by direction

Select internal, outgoing, or incoming.

From	To	Status	Duration	Owner	Trunk
UNKNOWN 161322...	Support Level 1 1100	Ringing	00:05:02	Q: "Support Level 1"...	trunk_FortiCall

Active call popup




To see the active call popup, the FortiVoice system administrator must update the agent or manager profile to enable the **Popup active call** setting.

When you answer an active call, an active call window pops up.

This window displays the following details:

- From (name and extension)
- To (name and extension)
- Queue number for the owner
- IVR (interactive voice response), if available

Here is a window example of an active call popup:

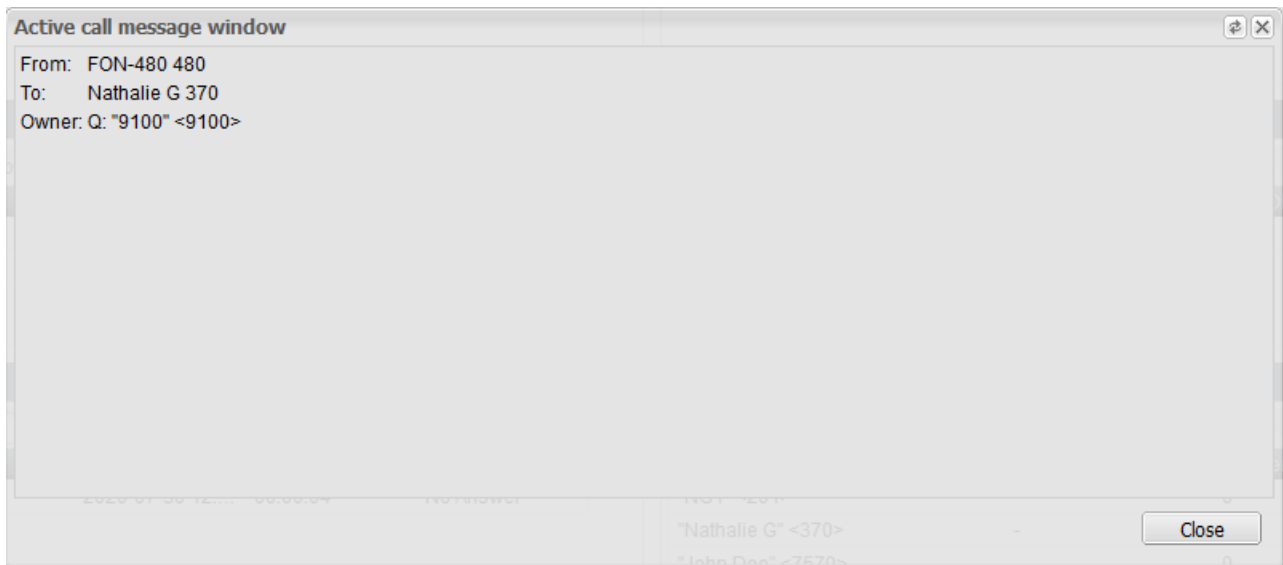

Assigning a classification label to a call

Agents can assign a classification label to a call. Managers can generate call reports using those classifications.




To get access to the classification labels, the FortiVoice system administrator must complete the following changes on the FortiVoice phone system:

- Update the call queue additional setting to add call classification labels.
- Update the agent or manager profile to enable the **Set call classification** option.

To assign a classification label to a call

1. Answer a call from a queue.
2. When the call is complete, hang up.

The call classification dialog box appears. Here is an example:

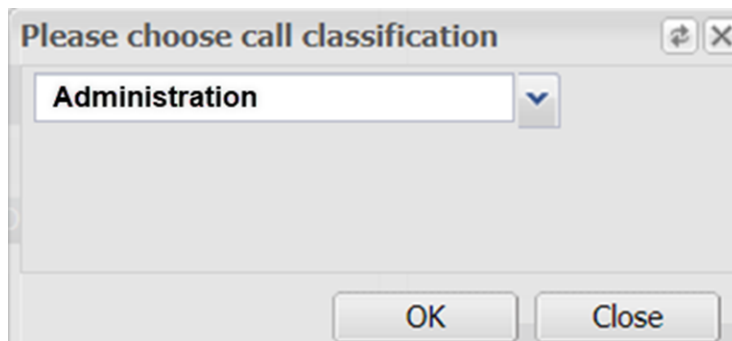

3. Select a label from the list.
4. Click **OK**.

Recent Calls

The **Recent Calls** widget shows a history of recent phone calls.

Recent Calls (agent and manager profiles view)

The screenshot shows the 'Recent Calls' widget interface. Two callout boxes provide instructions on how to filter the call list:

- Filter recent calls by direction**
Select all, internal, outgoing, or incoming.
- Filter recent calls by disposition**
Example choices are: no answer, failed, busy, answered, voicemail.

The widget header is 'Recent Calls - (17)'. Below the header, there are search and filter controls. The 'Page' is 1 of 0. The 'Direction' dropdown is set to '--All--'. The 'Disposition' dropdown is also set to '--All--'. The table below displays the call history:

From (Name)	From	To (Name)	To	Start	Duration	Disposition
Arthur Curry	7205	Diana Prince	7207	2020-03-10 08...	00:00:12	Answered
Arthur Curry	7205	Diana Prince	7207	2020-03-10 08...	00:00:01	No Answer

Viewing recent call details

1. In the **Recent Calls** widget, double-click on a recent call entry.
2. You can review the call information, detail information, and call flow. Here is an example:

The screenshot displays the 'Call center console' interface. It is divided into three main sections: 'Call Information', 'Detail Information', and 'Call Flow'.

Call Information

- From: 16132259381
- To: 370
- Start: 2020-07-30 16:30:59
- Real duration: 00:00:16 (16 seconds)
- Disposition: Answered

Detail Information

- Answer: 2020-07-30 16:30:59
- End: 2020-07-30 16:31:16
- Source: 16132259381
- Dialed number/DNIS: 13438821528
- Destination: 9100
- Trunk: 3438821528
- Bill duration: 00:00:16 (16 seconds)
- Direction: Incoming
- Department:
- Unique ID: 1596141039.30
- Call type: Voice
- Account code:


Call Flow

Page 1 / 1 | Records per page: 50 | Download | Total: 9

Time	Description
16:30:39	incoming call matched dialplan:FortiCall_Inbound on trunk:trunk_3438821528, caller:"Fortinet Techno" <16132259381>
16:30:45	enter auto attendant:auto_attendant_default
16:30:51	user input:3 through auto attendant:auto_attendant_default
16:30:51	deliver call to queue 9100 with priority 0
16:30:52	caller enter queue 9100 at position 1 with real priority 0
16:30:59	call picked up by 370
16:31:16	call hangup by agent 370
16:31:16	agent 370 start wrapup until 2020-07-30 16:31:16
16:31:16	call hangup by callee, status:NORMAL

Directory

The **Directory** widget shows the company directory and lists the extension (number) and display name for every entry.

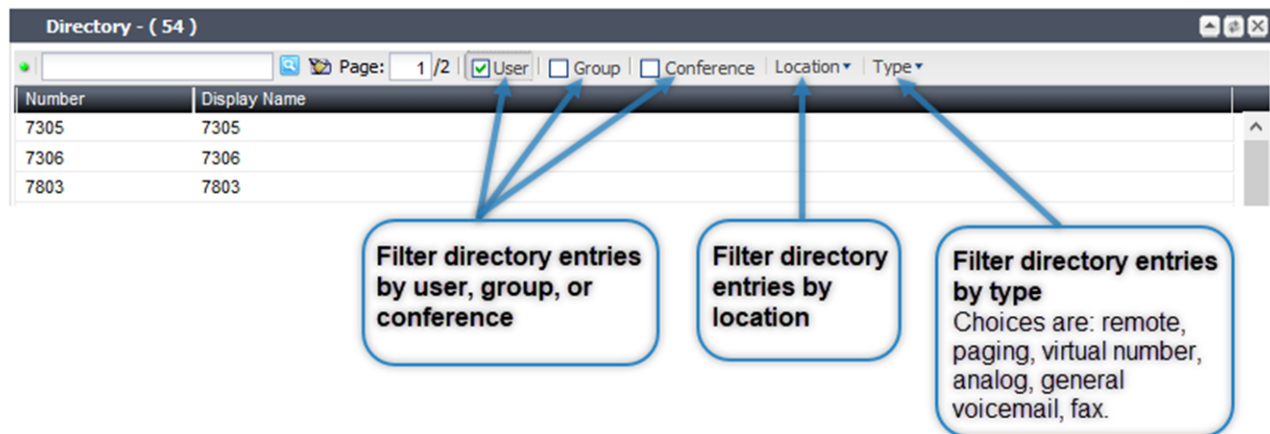

Agent

With the agent profile, you can perform the following tasks in the **Agent** widget:

- View a list of agents that are members of your queue.
- Access agent details.
- Take a pause from answering calls in a queue without logging out of a queue by assigning a pause reason code. To resume taking calls again, you unpause your status.

With the manager profile, you can perform the following additional tasks in the **Agent** widget:

- Log in or log out an agent of a queue.
- If you want a logged in agent to pause from answering calls from a queue, but you do not want to log that agent out of the queue, you can pause that agent and assign a pause reason code. The agent stops receiving calls until you unpause that agent.

Agent (agent profile view)

Pause or resume your agent status

Click to pause your logged in status for a selected queue and assign a reason code or resume your active logged in status.

FortiVoice 1000E

Queue Login Pause/Resume

Agent - (4)

Page: 1 / 1 Queue Status

Agent	Last Call	Answered	Reason	Duration	Status
"NG2" <7370>	-	0		-	Logged in
"John Doe" <7570>	-	0		-	Logged out
"Reception" <7575>	-	2		-	Logged in

Filter agents by queue

Filter agents by status

Choices are: in use, logged out, logged in, paused, wrap up, and hold off.

Agent (manager profile view)


The screenshot shows the 'Agent - (7)' interface. At the top, there is a search bar and a 'Page: 1 / 1 Queue' indicator. Below this is a table with columns: Agent, Last Call, Answered, Reason, Duration, and Status. The table lists four agents: 'Juliet Higgins' <7101> (Logged in), 'Room 1' <1001> (Logged out), 'Luke Fox' <7107> (Logged out), and 'Barry Allen' <7203> (Logged out). To the right of the table are buttons for 'Login', 'Logout', and 'Pause/Resume'. Callouts provide instructions for these actions:

- Filter agents by queue**: Points to the 'Queue' dropdown menu.
- Filter agents by status**: Points to the 'Status' dropdown menu. Choices are: in use, logged out, logged in, paused, wrap up, hold off.
- Log in an agent in a queue**: Points to the 'Login' button. Select an agent and click to log that agent in a queue.
- Log out an agent of a queue**: Points to the 'Logout' button. Select an agent and click to log that agent out of a queue.
- Pause or resume an agent status**: Points to the 'Pause/Resume' button. Select a logged in agent and click to select a queue and assign a reason code or resume normal status.

Agent	Last Call	Answered	Reason	Duration	Status
"Juliet Higgins" <7101>	-	0		-	Logged in
"Room 1" <1001>	-	0		-	Logged out
"Luke Fox" <7107>	-	0		-	Logged out
"Barry Allen" <7203>	-	0		-	Logged out

Viewing agent details

1. In the **Agent** widget, double-click on an agent.
2. You can review the agent information and queue status. Here is an example:

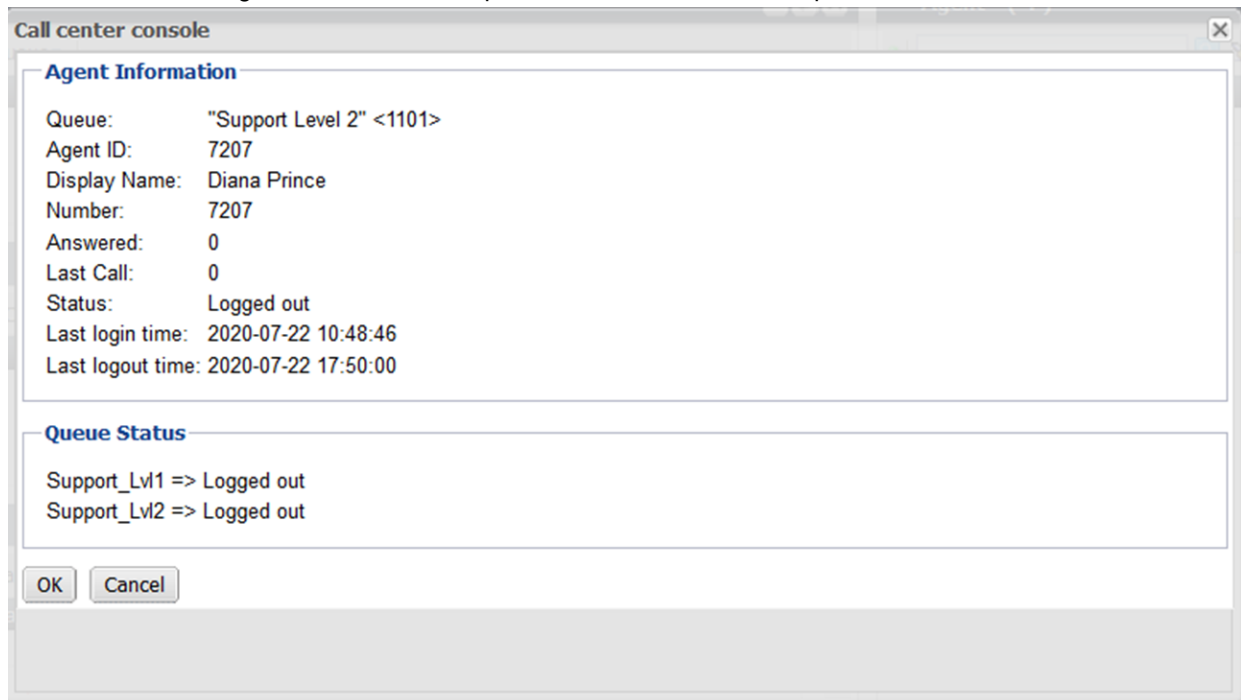

Queue Stat Today

With the **Queue Stat Today** widget, you get a statistics summary of the call activities for the day.

For more details about the abbreviations used in the column headings, see [Abbreviations used in the Queue Stat Today widget on page 48](#).

Queue Stat Today - (2)											
Queue	CT	CAn	CAb	COF	CTr	CTO	CTT	CWT	OB	OBT	
"Support Level 1" <1100>	1	0	1	0	0	0	00:00:00	00:00:13	0	00:00:00	^
"Support Level 2" <1101>	0	0	0	0	0	0	00:00:00	00:00:00	0	00:00:00	v

Abbreviations used in the Queue Stat Today widget

Abbreviation	Full name
CT	Call total
CAn	Call answered

Abbreviation	Full name
CAb	Call abandoned
COF	Call overflowed
CTr	Call transferred
CTO	Call timed out
CTT	Average talk time
CWT	Average wait time
OB	Outbound call
OBT	Outbound call average talk time

Queue Agent Summary

With the **Queue Agent Summary** widget, you get statistics of agent activities.

For more details about the abbreviations used in the column headings, see [Abbreviations used in the Queue Agent Summary widget on page 49](#).

Queue	AT	ALI	AAv	ATK	APS	AHD	LTT	LCW	CW
"Support Level 1" <1100>	4	2	2	0	0	0	00:00:00	00:00:00	0
"Support Level 2" <1101>	4	1	1	0	0	0	00:00:00	00:00:00	0

Abbreviations used in the Queue Agent Summary widget

Abbreviation	Full name
AT	Agent total
ALI	Agent logged in
AAv	Agent available
ATK	Agent talking
APS	Agent paused
AHD	Agent on hold
LTT	Longest talk time
LCW	Longest call waiting time
CW	Call waiting

Queue Callback List

With the **Queue Callback List** widget, the agent and manager get a list of callers that have requested to be called back instead of waiting for a prolonged hold time to speak with an agent.



For the **Queue Callback List** widget to display call information, the FortiVoice system administrator must complete the following changes on the FortiVoice phone system:

- In **Call Center > Call Queue > Call Queue**, edit the **Additional Setting** of a queue:
 - Enable **Callback Setting**.
 - Update the **Callback mode** to **Agent Call Back Manually**.

Queue Callback List (agent and manager profiles view)

The screenshot shows the 'Queue Callback List - (1)' widget. It includes a table with columns: Queue, Call ID, Caller Number, Caller Name, Callback Num..., Position, and Create Time. The first row shows 'Support_Lvl1' with a call ID '1595600449.1...' and a caller number '16132259381'. Annotations include:

- Initiate a callback**: Select a call in the list and click. (Points to the first row of the table)
- Change refresh setting**: Click to select an automatic refresh interval for the callback queue. (Points to the refresh icon in the top right)
- Filter callback callers by queue**: (Points to the 'Queue' dropdown menu)

Service-level alerts

When setting up a call queue, the FortiVoice system administrator can configure the FortiVoice unit to notify managers by email, phone call, or GUI pop-up window when an event occurs on the system.

The FortiVoice system administrator can configure one or more of the following events:

- **Queue overflow**: The manager receives a notification when the system reaches the maximum queue capacity. The FortiVoice system administrator configures this setting and the related overflow call handling during the queue creation.
- **Agent available ratio below**: This setting specifies a percentage for the agent available ratio. If the ratio falls below the specified percentage, the FortiVoice phone system sends an alert.
- **Caller waiting timeout**: If a call is not answered within the maximum number of minutes specified in the maximum queuing time, the FortiVoice phone system sends an alert and handles the call according to the timeout call handling setting.

- **Caller waiting over:** Specifies the maximum number of minutes that a caller can wait before the system sends an alert.
- **Number of waiting caller over:** Specifies the maximum number of waiting callers that the system can have before the system sends an alert.

Monitor view

With the **Monitor view**, you get access to a wallboard to monitor items such as queues and agent performance.



To have access to the monitoring function, the FortiVoice system administrator must update the manager profile to enable the monitoring console privilege.

Accessing the Monitor view



In the following example, the manager completed the creation of a help desk wallboard on the FortiVoice phone system to monitor the following performances:


- Queue performance


FortiVoice 200F8		Queue_Perfo...				
		Calls in Queue	Longest Waiting	Abandoned	Received Today	Answered Today
Help Desk 8500		0	0:00:00	0	1	1

- Agent performance

Help_Desk	Status	Time	Status	Time	Status	Time
Agent-1 3011	Idle	1:04:59				
Agent-2 3012	Idle	0:03:40				

Logging out of a queue

1. To log out of a queue, click  Queue Logout.
2. Select the queue(s).

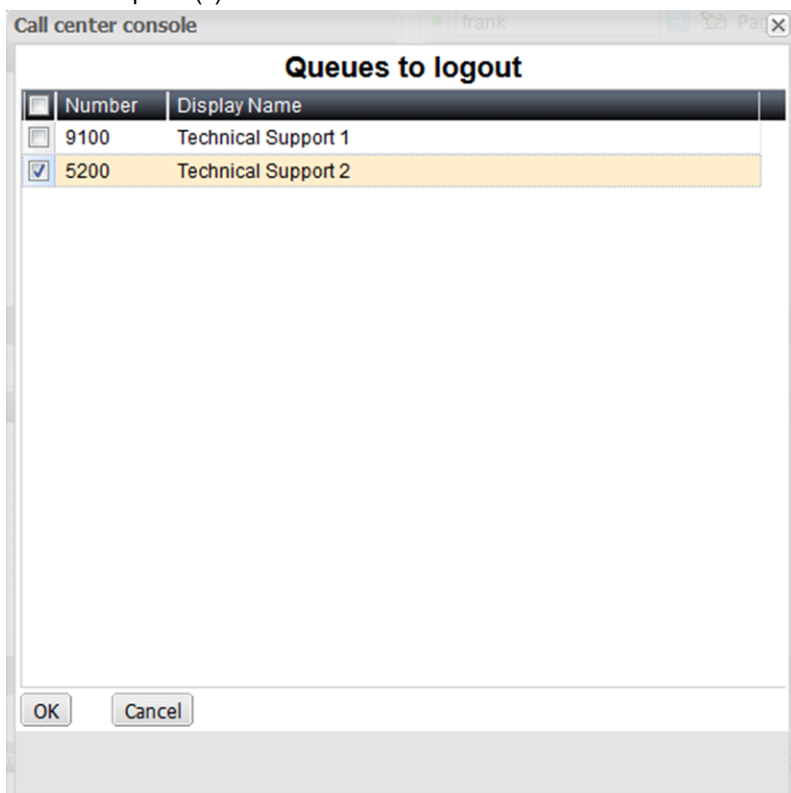

3. Click **OK**.


Logging out of the call center console

1. To log out of the call center console, click  Log Out.



2. If you are still logged in to one or more queues, follow the prompts to log out of the queues.

3. After completing the console logout, the following dialog box appears:

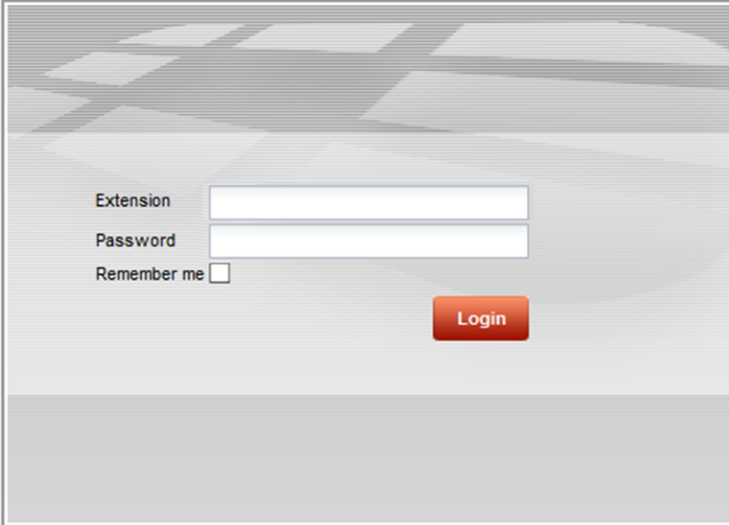A login dialog box with a light gray background and a subtle geometric pattern. It contains three input fields: "Extension" and "Password" are text boxes, and "Remember me" is a checkbox. Below these fields is a red "Login" button.

Extension

Password

Remember me ☐

Login



FORTINET®



Copyright© 2020 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., in the U.S. and other jurisdictions, and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. In no event does Fortinet make any commitment related to future deliverables, features or development, and circumstances may change such that any forward-looking statements herein are not accurate. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.