

# Release Notes

**FortiAnalyzer 7.2.1**



**FORTINET DOCUMENT LIBRARY**

<https://docs.fortinet.com>

**FORTINET VIDEO LIBRARY**

<https://video.fortinet.com>

**FORTINET BLOG**

<https://blog.fortinet.com>

**CUSTOMER SERVICE & SUPPORT**

<https://support.fortinet.com>

**FORTINET TRAINING & CERTIFICATION PROGRAM**

<https://www.fortinet.com/training-certification>

**FORTINET TRAINING INSTITUTE**

<https://training.fortinet.com>

**FORTIGUARD LABS**

<https://www.fortiguard.com>

**END USER LICENSE AGREEMENT**

<https://www.fortinet.com/doc/legal/EULA.pdf>

**FEEDBACK**

Email: [techdoc@fortinet.com](mailto:techdoc@fortinet.com)



January 5, 2024

FortiAnalyzer 7.2.1 Release Notes

05-721-806202-20240105

# TABLE OF CONTENTS

<b>Change Log</b>	<b>6</b>
<b>FortiAnalyzer 7.2.1 Release</b>	<b>7</b>
Supported models	7
FortiAnalyzer VM subscription license	7
Management extension applications	8
Supported models for MEA	8
Minimum system requirements	8
FortiRecorder	9
Supported models for FortiRecorder	9
Supported cameras	9
<b>Special Notices</b>	<b>11</b>
FortiAnalyzer 7.2.3 and later firmware on FortiGuard	11
FortiAnalyzer 7.2.1 GUI issues in Google Chrome and Microsoft Edge	11
FortiManager Features removed	11
Setup wizard requires FortiCare registration	12
Fortinet verified publisher docker image	12
Hyperscale firewall mode	13
Modifying the interface status with the CLI	14
Citrix XenServer default limits and upgrade	14
FortiAnalyzer VM upgrade requires more memory	14
Maximum ADOM limits for FortiAnalyzer	15
Port 8443 reserved	15
Hyper-V FortiAnalyzer-VM running on an AMD CPU	15
SSLv3 on FortiAnalyzer-VM64-AWS	15
<b>Upgrade Information</b>	<b>16</b>
Downgrading to previous firmware versions	16
Firmware image checksums	16
FortiAnalyzer VM firmware	16
SNMP MIB files	18
<b>Product Integration and Support</b>	<b>19</b>
Supported software	19
Web browsers	20
FortiOS and FortiOS Carrier	20
FortiADC	20
FortiNDR and FortiAI	21
FortiAnalyzer	21
FortiAuthenticator	21
FortiCache	21
FortiClient	21
FortiDDoS	21
FortiDeceptor	22
FortiFirewall and FortiFirewallCarrier	22

FortiMail .....	22
FortiManager .....	22
FortiNAC .....	22
FortiProxy .....	23
FortiSandbox .....	23
FortiSOAR .....	23
FortiSwitch ATCA .....	23
FortiWeb .....	23
Virtualization .....	24
Feature support .....	24
Language support .....	25
Supported models .....	26
FortiGate models .....	26
FortiGate special branch models .....	32
FortiCarrier models .....	35
FortiCarrier special branch models .....	37
FortiADC models .....	39
FortiNDR and FortiAI models .....	39
FortiAnalyzer models .....	40
FortiAuthenticator models .....	40
FortiCache models .....	41
FortiDDoS models .....	41
FortiDeceptor models .....	41
FortiFirewall models .....	41
FortiFirewallCarrier models .....	42
FortiMail models .....	42
FortiNAC models .....	42
FortiProxy models .....	43
FortiSandbox models .....	43
FortiSOAR models .....	43
FortiSwitch ATCA models .....	43
FortiWeb models .....	44
<b>Resolved Issues .....</b>	<b>45</b>
Device Manager .....	45
FortiSOC .....	45
FortiView .....	46
Log View .....	46
Others .....	46
Reports .....	47
System Settings .....	48
<b>Known Issues .....</b>	<b>49</b>
Device Manager .....	49
Event Management .....	49
FortiSOC .....	49
FortiView .....	50
Log View .....	50
Others .....	51

---

Reports .....	51
System Settings .....	52
<b>Appendix A - Default and maximum number of ADOMs supported .....</b>	<b>54</b>
Hardware models .....	54
Virtual Machines .....	55
FortiAnalyzer subscription license .....	55
FortiAnalyzer perpetual license .....	55

# Change Log

Date	Change Description
2022-08-09	Initial release.
2022-08-09	Updated <a href="#">Resolved Issues on page 45</a> and <a href="#">Known Issues on page 49</a> .
2022-08-11	Updated <a href="#">Special Notices on page 11</a> .
2022-09-06	Updated <a href="#">Special Notices on page 11</a> .
2022-09-30	Updated <a href="#">FortiOS and FortiOS Carrier on page 20</a> .
2022-10-28	Updated <a href="#">Appendix A - Default and maximum number of ADOMs supported on page 54</a> .
2022-11-02	Updated <a href="#">Resolved Issues on page 45</a> and <a href="#">Known Issues on page 49</a> .
2022-11-03	Updated <a href="#">FortiGate models on page 26</a> .
2022-11-10	Updated <a href="#">FortiOS and FortiOS Carrier on page 20</a> .
2022-12-01	Updated <a href="#">Management extension applications on page 8</a>
2022-12-06	Updated <a href="#">Resolved Issues on page 45</a> .
2023-01-19	Updated <a href="#">Known Issues on page 49</a> .
2023-03-16	Updated <a href="#">Resolved Issues on page 45</a> and <a href="#">Known Issues on page 49</a> .
2023-03-23	Updated <a href="#">FortiOS and FortiOS Carrier on page 20</a> .
2023-04-27	Updated <a href="#">FortiManager on page 22</a>
2023-06-01	Updated <a href="#">Special Notices on page 11</a> and <a href="#">Web browsers on page 20</a>
2023-06-05	Updated <ul style="list-style-type: none"><li>• <a href="#">Special Notices on page 11</a></li><li>• <a href="#">Web browsers on page 20</a></li><li>• <a href="#">Known Issues on page 49</a></li></ul>
2023-09-25	Updated <a href="#">FortiClient on page 21</a> .
2024-01-05	Added the <i>FortiAnalyzer 7.2.3 and later firmware on FortiGuard</i> Special Notice.

# FortiAnalyzer 7.2.1 Release

This document provides information about FortiAnalyzer version 7.2.1 build 1215.



The recommended minimum screen resolution for the FortiAnalyzer GUI is 1920 x 1080. Please adjust the screen resolution accordingly. Otherwise, the GUI may not display properly.

This section includes the following topics:

- [Supported models on page 7](#)
- [FortiAnalyzer VM subscription license on page 7](#)
- [Management extension applications on page 8](#)
- [FortiRecorder on page 9](#)

## Supported models

FortiAnalyzer version 7.2.1 supports the following models:

<b>FortiAnalyzer</b>	FAZ-150G, FAZ-300F, FAZ-300G, FAZ-400E, FAZ-800F, FAZ-800G, FAZ-1000F, FAZ-2000E, FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F, and FAZ-3700G.
<b>FortiAnalyzer VM</b>	FAZ_DOCKER, FAZ_VM64, FAZ_VM64_ALI, FAZ_VM64_AWS, FAZ_VM64_AWSOnDemand, FAZ_VM64_Azure, FAZ_VM64_GCP, FAZ_VM64_IBM, FAZ_VM64_HV (including Hyper-V 2016, 2019), FAZ_VM64_KVM, FAZ_VM64_OPC, FAZ_VM64_XEN (for both Citrix and Open Source Xen),



FAZ-300F supports the subscription license for the SOC service. However performance may be impacted because FAZ-300F has fewer resources and a smaller CPU than other FortiAnalyzer models that support the SOC service.

## FortiAnalyzer VM subscription license

The FortiAnalyzer VM subscription license supports FortiAnalyzer version 6.4.1 and later. For information about supported firmware, see [FortiAnalyzer VM firmware on page 16](#).

See also [Appendix A - Default and maximum number of ADOMs supported on page 54](#).





You can use the FortiAnalyzer VM subscription license with new FAZ-VM installations. For existing FAZ-VM installations, you can migrate to a FortiAnalyzer VM subscription license, starting with FortiAnalyzer 7.0.1. See the [FortiAnalyzer 7.0.1 VM License Migration Guide](#).

## Management extension applications

The following section describes supported models and minimum system requirements for management extension applications (MEA) in FortiAnalyzer 7.2.1.



FortiAnalyzer uses port TCP/443 or TCP/4443 to connect to the Fortinet registry and download MEAs. Ensure that the port is also open on any upstream FortiGates. For more information about incoming and outgoing ports, see the [FortiAnalyzer 7.0 Ports Guide](#).

## Supported models for MEA

You can use any of the following FortiAnalyzer models as a host for management extension applications:

<b>FortiAnalyzer</b>	FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F, and FAZ-3700G.
<b>FortiAnalyzer VM</b>	FAZ_DOCKER, FAZ_VM64, FAZ_VM64_ALI, FAZ_VM64_AWS, FAZ_VM64_AWSOnDemand, FAZ_VM64_Azure, FAZ_VM64_GCP, FAZ_VM64_IBM, FAZ_VM64_HV (including Hyper-V 2016, 2019), FAZ_VM64_KVM, FAZ_VM64_OPC, FAZ_VM64_XEN (for both Citrix and Open Source Xen),

## Minimum system requirements

By default FortiAnalyzer VMs use the following system resource settings:

- 4 vCPU
- 8 GB RAM
- 500 GB disk space

Starting with FortiAnalyzer 7.0.0, RAM and CPU is capped at 50% for MEAs. (Use the `config system docker` command to view the setting.) If FortiAnalyzer has 8 CPUs and 16 GB RAM, then only 4 CPUs and 8 GB RAM are available to MEAs by default, and the 4 CPUs and 8 GB RAM are used for all enabled MEAs.

Some MEAs have minimum system requirements that require you to increase system resources. The following table identifies the minimum requirements for each MEA as well as the recommended system resources to function well in a production environment.

MEA minimum system requirements apply only to the individual MEA and do not take into consideration any system requirements for resource-sensitive FortiAnalyzer features or multiple, enabled MEAs.



Management Extension Application	Minimum system requirements	Recommended system resources for production*
<b>FortiSIEM</b>	<ul style="list-style-type: none"> <li>• 4 vCPU</li> <li>• 4 GB RAM</li> <li>• No change for disk storage</li> </ul>	<ul style="list-style-type: none"> <li>• 12 vCPU</li> <li>• 16 GB RAM</li> <li>• 500 GB</li> </ul>
<b>FortiSOAR</b>	<ul style="list-style-type: none"> <li>• 4 vCPU</li> <li>• 8 GB RAM</li> <li>• 500 GB disk storage</li> </ul>	<ul style="list-style-type: none"> <li>• 16 vCPU</li> <li>• 64 GB RAM</li> <li>• No change for disk storage</li> </ul>

\*The numbers in the *Recommended system resources for production* column are a combination of the default system resource settings for FortiAnalyzer plus the recommended system requirements for the MEA.

## FortiRecorder

This section identifies what FortiAnalyzer models support the FortiRecorder module and what FortiCamera models are supported.

### Supported models for FortiRecorder

Below is a list of the FortiAnalyzer appliances that support the FortiRecorder module.

Platform	Maximum number of cameras
FAZ-300F	6
FAZ-400E	12
FAZ-800F	16
FAZ-1000F	50
FAZ-2000E	40
FAZ-3000F	50
FAZ-3500G	50
FAZ-3700F	60

### Supported cameras

The FortiRecorder module supports the following FortiCamera models:

- FCM-CB20
- FCM-FD20
- FCM-FD20B
- FCM-FD40

- FCM-MB40
- FCM-MD20
- FCM-MD40
- FCM-OB30

# Special Notices

This section highlights some of the operational changes that administrators should be aware of in FortiAnalyzer version 7.2.1.

## FortiAnalyzer 7.2.3 and later firmware on FortiGuard

Starting in FortiAnalyzer 7.2.1, a setup wizard executes to prompt the user for various configuration steps and registration with FortiCare. During the execution, the FortiAnalyzer unit attempts to communicate with FortiGuard for a list of FortiAnalyzer firmware images currently available on FortiGuard – older and newer.

In the case of FortiAnalyzer 7.2.2, a bug in the GUI prevents the wizard from completing and prevents the user from accessing the FortiAnalyzer unit. The issue has been fixed in 7.2.3 and later and a CLI command has been added to bypass the setup wizard at login time.

```
config system admin setting
    set firmware-upgrade-check disable
end
```

Fortinet has not uploaded FortiAnalyzer 7.2.3 and later firmware to FortiGuard in order to work around the GUI bug, however, the firmware is available for download from the [Fortinet Support website](#).

## FortiAnalyzer 7.2.1 GUI issues in Google Chrome and Microsoft Edge

The FortiAnalyzer 7.2.1 GUI may not work properly in Google Chrome version 114 (114.0.5735.91) and Microsoft Edge version 114 (114.0.1823.37).

For information about supported web browsers, see [Web browsers on page 20](#).

## FortiManager Features removed

FortiAnalyzer 7.2.1 and later no longer supports FortiManager Features. If you have FortiManager Features enabled before upgrading to FortiAnalyzer 7.2.1, FortiManager Features will be permanently disabled after upgrading to FortiAnalyzer 7.2.1.

## Setup wizard requires FortiCare registration

Starting in FortiAnalyzer 7.2.1, the FortiAnalyzer Setup wizard requires you to complete the *Register with FortiCare* step before you can access the FortiAnalyzer appliance or VM. Previously the step was optional.

For FortiAnalyzer units operating in a closed environment, contact customer service to receive an entitlement file, and then load the entitlement file to FortiAnalyzer by using the CLI.


When FortiManager is managing FortiAnalyzer in a closed environment, FortiManager contains the FortiAnalyzer contract information, and you can point FortiAnalyzer to FortiManager.

## Fortinet verified publisher docker image


FortiAnalyzer 7.0.1 docker image is available for download from Fortinet's Verified Publisher public repository on dockerhub.

### To download the FortiAnalyzer image from dockerhub:

1. Go to dockerhub at <https://hub.docker.com/>.  
The dockerhub home page is displayed.

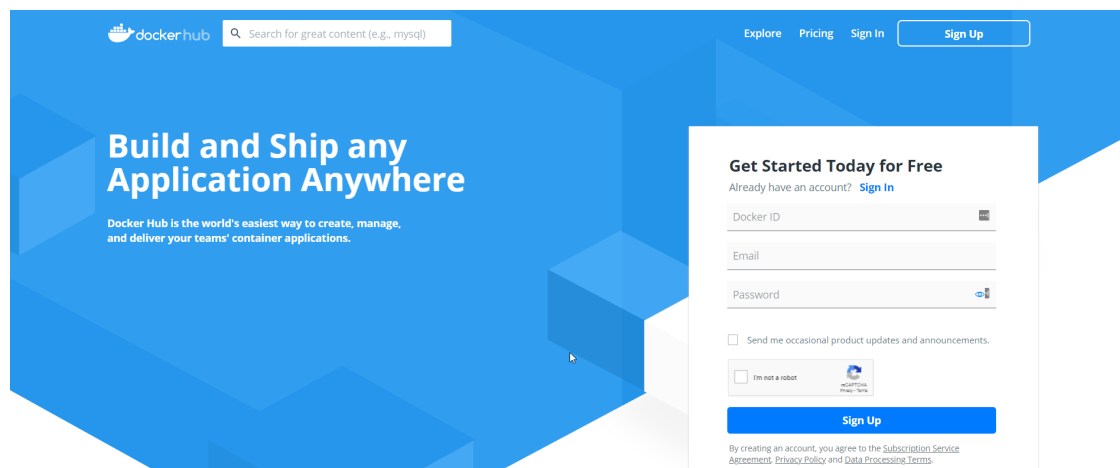


2. In the banner, click *Explore*.
3. In the search box, type *Fortinet*, and press *Enter*.  
The *fortinet/fortimanager* and *fortinet/fortianalyzer* options are displayed.

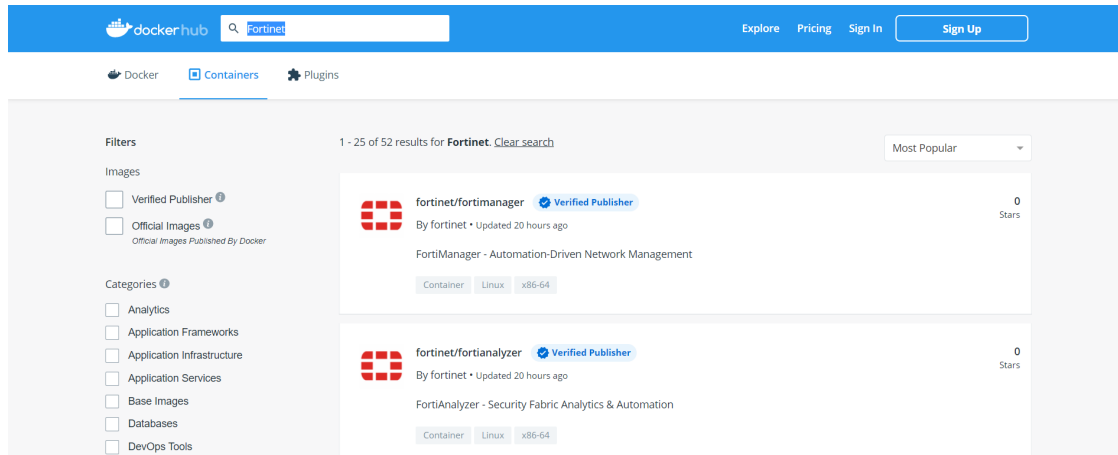

4. Click *fortinet/fortianalyzer*.

The *fortinet/fortianalyzer* page is displayed, and two tabs are available: *Overview* and *Tags*. The *Overview* tab is selected by default.

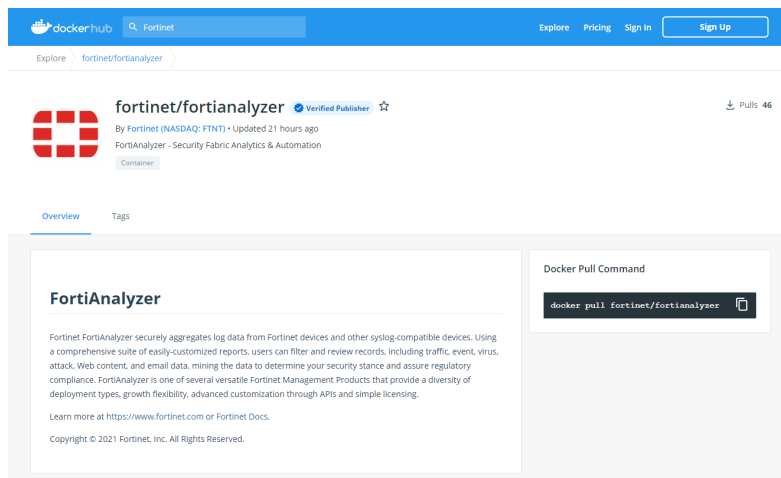

5. On the *Overview* tab, copy the docker pull command, and use it to download the image.

The CLI command from the *Overview* tab points to the latest available image. Use the *Tags* tab to access different versions when available.

## Hyperscale firewall mode

FortiAnalyzer does not support logs from the following models when they have hyperscale firewall mode and netflow enabled:

- FortiGate-1800F
- FortiGate-1801F
- FortiGate-2600F
- FortiGate-2601F
- FortiGate-4200F
- FortiGate-4201F

- FortiGate-4400F
- FortiGate-4401F

FortiAnalyzer only supports logs when the normal firewall mode with standard FortiGate logging are enabled.

## Modifying the interface status with the CLI

Starting in version 7.0.1, the CLI to modify the interface status has been changed from `up/down` to `enable/disable`.

For example:

```
config system interface
  edit port2
    set status <enable/disable>
  next
end
```

## Citrix XenServer default limits and upgrade

Citrix XenServer limits ramdisk to 128M by default. However the FAZ-VM64-XEN image is larger than 128M. Before updating to FortiAnalyzer 6.4, increase the size of the ramdisk setting on Citrix XenServer.

**To increase the size of the ramdisk setting:**

1. On Citrix XenServer, run the following command:

```
xenstore-write /mh/limits/pv-ramdisk-max-size 536,870,912
```

2. Confirm the setting is in effect by running `xenstore-ls`.

```
-----
limits = ""
pv-kernel-max-size = "33554432"
pv-ramdisk-max-size = "536,870,912"
boot-time = ""
-----
```

3. Remove the pending files left in `/run/xen/pygrub`.



The ramdisk setting returns to the default value after rebooting.

---

## FortiAnalyzer VM upgrade requires more memory

When upgrading FortiAnalyzer VM units from FortiAnalyzer 6.2.x to FortiAnalyzer 6.4.0 and later, the upgrade may fail because of memory allocation.

**Workaround:** Before upgrading FortiAnalyzer VM to FortiAnalyzer 6.4.0 and later, change the memory allocation to 8 GB of RAM.

## Maximum ADOM limits for FortiAnalyzer

FortiAnalyzer hardware devices and VMs display a warning when the maximum number of ADOMs is reached or exceeded. The platform does not enforce the limit; however, adding more ADOMs may affect the performance of the unit. For more details, see [Appendix A - Default and maximum number of ADOMs supported on page 54](#).

## Port 8443 reserved

Port 8443 is reserved for https-logging from FortiClient EMS for Chromebooks. See also [FortiAnalyzer 7.0 Ports Reference](#) on the Docs Library.

## Hyper-V FortiAnalyzer-VM running on an AMD CPU

A Hyper-V FAZ-VM running on a PC with an AMD CPU may experience a kernel panic. Fortinet recommends running VMs on an Intel-based PC.

## SSLv3 on FortiAnalyzer-VM64-AWS

Due to known vulnerabilities in the SSLv3 protocol, FortiAnalyzer-VM64-AWS only enables TLSv1 by default. All other models enable both TLSv1 and SSLv3. If you wish to disable SSLv3 support, please run:

```
config system global
    set ssl-protocol tlsv1
end
```



# Upgrade Information



Prior to upgrading your FortiAnalyzer, please review the FortiAnalyzer Upgrade Guide in detail as it includes all of the necessary steps and associated details required to upgrade your FortiAnalyzer device or VM.

See [FortiAnalyzer 7.2.1 Upgrade Guide](#).

You can upgrade FortiAnalyzer 7.0.0 or later directly to 7.2.1.

This section contains the following topics:

- [Downgrading to previous firmware versions on page 16](#)
- [Firmware image checksums on page 16](#)
- [FortiAnalyzer VM firmware on page 16](#)
- [SNMP MIB files on page 18](#)

## Downgrading to previous firmware versions

FortiAnalyzer does not provide a full downgrade path. You can downgrade to a previous firmware release by using the GUI or CLI, but doing so results in configuration loss. A system reset is required after the firmware downgrade process has completed. To reset the system, use the following CLI commands via a console port connection:

```
execute reset {all-settings | all-except-ip}  
execute format {disk | disk-ext4 | disk-ext3}
```

## Firmware image checksums

The MD5 checksums for all Fortinet software and firmware releases are available at the Customer Service & Support portal, <https://support.fortinet.com>. After logging in, go to *Download > Firmware Image Checksums*, enter the image file name including the extension, and select *Get Checksum Code*.

## FortiAnalyzer VM firmware

Fortinet provides FortiAnalyzer VM firmware images for Amazon AWS, Amazon AWSOnDemand, Citrix and Open Source XenServer, Linux KVM, Microsoft Hyper-V Server, and VMware ESX/ESXi virtualization environments.

### Amazon Web Services

- The 64-bit Amazon Machine Image (AMI) is available on the AWS marketplace.

### Citrix XenServer and Open Source XenServer

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.OpenXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the QCOW2 file for the Open Source Xen Server.
- `.out.CitrixXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the Citrix XenServer Virtual Appliance (XVA), Virtual Hard Disk (VHD), and OVF files.

### Google Cloud Platform

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.gcp.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

### Linux KVM

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.kvm.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains QCOW2 that can be used by qemu.

### Microsoft Azure

The files for Microsoft Azure have AZURE in the filenames, for example `<product>_VM64_AZURE-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.

### Microsoft Hyper-V Server

The files for Microsoft Hyper-V Server have HV in the filenames, for example, `<product>_VM64_HV-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.hyperv.zip`: Download the package for a new FortiAnalyzer VM installation. This package contains a Virtual Hard Disk (VHD) file for Microsoft Hyper-V Server.



Microsoft Hyper-V 2016 is supported.

---

### Oracle Private Cloud

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.opc.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

### VMware ESX/ESXi

- `.out`: Download the 64-bit firmware image to upgrade your existing VM installation.
- `.ovf.zip`: Download either the 64-bit package for a new VM installation. This package contains an Open Virtualization Format (OVF) file for VMware and two Virtual Machine Disk Format (VMDK) files used by the OVF file during deployment.



For more information, see the [FortiAnalyzer Data Sheet](#) available on the Fortinet web site. VM installation guides are available in the [Fortinet Document Library](#).

---

## SNMP MIB files

You can download the *FORTINET-FORTIMANAGER-FORTIANALYZER.mib* MIB file in the firmware image file folder. The Fortinet Core MIB file is located in the main FortiAnalyzer version 5.00 file folder.

# Product Integration and Support

This section lists FortiAnalyzer 7.2.1 support of other Fortinet products. It also identifies what FortiAnalyzer features are supported for managed platforms and what languages FortiAnalyzer supports. It also lists which Fortinet models can be managed by FortiAnalyzer.

The section contains the following topics:

- [Supported software on page 19](#)
- [Feature support on page 24](#)
- [Language support on page 25](#)
- [Supported models on page 26](#)

## Supported software

FortiAnalyzer 7.2.1 supports the following software:

- [Web browsers on page 20](#)
- [FortiOS and FortiOS Carrier on page 20](#)
- [FortiADC on page 20](#)
- [FortiNDR and FortiAI on page 21](#)
- [FortiAnalyzer on page 21](#)
- [FortiAuthenticator on page 21](#)
- [FortiCache on page 21](#)
- [FortiClient on page 21](#)
- [FortiDDoS on page 21](#)
- [FortiDeceptor on page 22](#)
- [FortiFirewall and FortiFirewallCarrier on page 22](#)
- [FortiMail on page 22](#)
- [FortiManager on page 22](#)
- [FortiNAC on page 22](#)
- [FortiProxy on page 23](#)
- [FortiSandbox on page 23](#)
- [FortiSOAR on page 23](#)
- [FortiSwitch ATCA on page 23](#)
- [FortiWeb on page 23](#)
- [Virtualization on page 24](#)



To confirm that a device model or firmware version is supported by the current firmware version running on FortiAnalyzer, run the following CLI command:

```
diagnose dvm supported-platforms list
```

---



Always review the Release Notes of the supported platform firmware version before upgrading your device.

---

## Web browsers

FortiAnalyzer 7.2.1 supports the following web browsers:

- Microsoft Edge 80 (80.0.361 or later)
- Mozilla Firefox version 96
- Google Chrome version 113



Please note the GUI may not work properly in Google Chrome version 114 (114.0.5735.91) and Microsoft Edge version 114 (114.0.1823.37).

---

Other web browsers may function correctly, but are not supported by Fortinet.

## FortiOS and FortiOS Carrier



The *FortiAnalyzer Release Notes* communicate support for FortiOS versions that are available at the time of the FortiAnalyzer 7.2.1 release. For additional information about other supported FortiOS versions, please refer to the FortiAnalyzer compatibility chart in the [Fortinet Document Library](#).

See [FortiAnalyzer compatibility with FortiOS](#).

---

FortiAnalyzer 7.2.1 supports the following versions of FortiOS and FortiOS Carrier:

- 7.2.0 to 7.2.3
- 7.0.0 to 7.0.11
- 6.4.0 to 6.4.12
- 6.2.0 to 6.2.11
- 6.0.0 to 6.0.15
- 5.6.0 to 5.6.14

## FortiADC

FortiAnalyzer 7.2.1 supports the following versions of FortiADC:

- 7.0.0 and later
- 6.2.0 and later
- 6.1.0 and later

## FortiNDR and FortiAI

FortiAnalyzer 7.2.1 supports the following versions of FortiNDR (formerly FortiAI):

- 7.0.0 and later
- 1.5 and later

## FortiAnalyzer

FortiAnalyzer 7.2.1 supports the following versions of FortiAnalyzer:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

## FortiAuthenticator

FortiAnalyzer 7.2.1 supports the following versions of FortiAuthenticator:

- 6.4.0 and later
- 6.3.0 and later
- 6.2.0 and later

## FortiCache

FortiAnalyzer 7.2.1 supports the following versions of FortiCache:

- 4.2.0 and later
- 4.1.0 and later
- 4.0.0 and later

## FortiClient

FortiAnalyzer 7.2.1 supports the following versions of FortiClient:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later
- 6.2.1 and later

When using FortiClient with FortiAnalyzer, it is recommended to upgrade both to their latest versions. The versions between the two products should match. For example, if using FortiAnalyzer 7.2.0, use FortiClient 7.2.0.

## FortiDDoS

FortiAnalyzer 7.2.1 supports the following versions of FortiDDoS:

- 6.3.0 and later
- 6.2.0 and later
- 6.1.0 and later

Limited support. For more information, see [Feature support on page 24](#).

## FortiDeceptor

FortiAnalyzer 7.2.1 supports the following versions of FortiDeceptor:

- 4.2.0 and later
- 4.1.0 and later
- 4.0.0 and later

## FortiFirewall and FortiFirewallCarrier

FortiAnalyzer 7.2.1 supports the following versions of FortiFirewall and FortiFirewallCarrier:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later
- 6.2.0 and later
- 6.0.0 and later
- 5.6.0 and later

## FortiMail

FortiAnalyzer 7.2.1 supports the following versions of FortiMail:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

## FortiManager

FortiAnalyzer 7.2.1 supports the following versions of FortiManager:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

## FortiNAC

FortiAnalyzer 7.2.1 supports the following versions of FortiNAC:

- 9.4.0 and later
- 9.2.0 and later



- 9.1.0 and later

## FortiProxy

FortiAnalyzer 7.2.1 supports the following versions of FortiProxy:

- 7.0.0 to 7.0.5
- 2.0.0 to 2.0.5
- 1.2.0 to 1.2.13
- 1.1.0 to 1.1.6
- 1.0.0 to 1.0.7

## FortiSandbox

FortiAnalyzer 7.2.1 supports the following versions of FortiSandbox:

- 4.2.0 and later
- 4.0.0 and later
- 3.2.0 and later

## FortiSOAR

FortiAnalyzer 7.2.1 supports the following versions of FortiSOAR:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

## FortiSwitch ATCA

FortiAnalyzer 7.2.1 supports the following versions of FortiSwitch ATCA:

- 5.2.0 and later
- 5.0.0 and later
- 4.3.0 and later

## FortiWeb

FortiAnalyzer 7.2.1 supports the following versions of FortiWeb:

- 7.0.0 and later
- 6.4.0 and later
- 6.3.0 and later

## Virtualization

FortiAnalyzer 7.2.1 supports the following virtualization software:

- Amazon Web Service AMI, Amazon EC2, Amazon EBS
- Citrix XenServer 7.2
- Google Cloud Platform
- Linux KVM Redhat 7.1
- Microsoft Azure
- Microsoft Hyper-V Server 2012, 2016, and 2019
- Nutanix AHV (AOS 5.10.5)
- OpenSource XenServer 4.2.5
- Oracle Private Cloud
- VMware ESXi versions 5.0, 5.5, 6.0, 6.5 , 6.7, and 7.0

## Feature support

The following table lists FortiAnalyzer feature support for log devices.

Platform	Log View	FortiView	Event Management	Reports
FortiGate	✓	✓	✓	✓
FortiCarrier	✓	✓	✓	✓
FortiADC	✓		✓	
FortiAI	✓	✓	✓	✓
FortiAnalyzer	✓		✓	
FortiAuthenticator	✓			
FortiCache	✓		✓	✓
FortiClient registered to FortiGate	✓	✓		✓
FortiClient registered to FortiClient EMS	✓	✓		✓
FortiDDoS	✓	✓	✓	✓
FortiDeceptor	✓			
FortiFirewall	✓	✓	✓	✓
FortiMail	✓		✓	✓
FortiManager	✓		✓	

Platform	Log View	FortiView	Event Management	Reports
FortiNAC	✓			
FortiProxy	✓		✓	✓
FortiSandbox	✓		✓	✓
FortiSOAR	✓		✓	✓
FortiWeb	✓		✓	✓
Syslog	✓		✓	✓

## Language support

The following table lists FortiAnalyzer language support information.

Language	GUI	Reports
English	✓	✓
Chinese (Simplified)	✓	✓
Chinese (Traditional)	✓	✓
French	✓	✓
Hebrew		✓
Hungarian		✓
Japanese	✓	✓
Korean	✓	✓
Portuguese		✓
Russian		✓
Spanish		✓

To change the FortiAnalyzer language setting, go to *System Settings > Admin > Admin Settings*, in *Administrative Settings > Language* select the desired language on the drop-down menu. The default value is *Auto Detect*.

Russian, Hebrew, and Hungarian are not included in the default report languages. You can create your own language translation files for these languages by exporting a predefined language from FortiAnalyzer, modifying the text to a different language, saving the file as a different language name, and then importing the file into FortiAnalyzer. For more information, see the *FortiAnalyzer Administration Guide*.

## Supported models

The following tables list which FortiGate, FortiCarrier, FortiDDoS, FortiAnalyzer, FortiMail, FortiSandbox, FortiSwitch ATCA, FortiWeb, FortiCache, FortiProxy, and FortiAuthenticator models and firmware versions that can be managed by a FortiManager or send logs to a FortiManager running version 7.2.1.



Software license activated LENC devices are supported, if their platforms are in the supported models list. For example, support of FG-3200D indicates support of FG-3200D-LENC.

---

This section contains the following topics:

- [FortiGate models on page 26](#)
- [FortiGate special branch models on page 32](#)
- [FortiCarrier models on page 35](#)
- [FortiCarrier special branch models on page 37](#)
- [FortiADC models on page 39](#)
- [FortiNDR and FortiAI models on page 39](#)
- [FortiAnalyzer models on page 40](#)
- [FortiAuthenticator models on page 40](#)
- [FortiCache models on page 41](#)
- [FortiDDoS models on page 41](#)
- [FortiDeceptor models on page 41](#)
- [FortiFirewall models on page 41](#)
- [FortiFirewallCarrier models on page 42](#)
- [FortiMail models on page 42](#)
- [FortiNAC models on page 42](#)
- [FortiProxy models on page 43](#)
- [FortiSandbox models on page 43](#)
- [FortiSOAR models on page 43](#)
- [FortiSwitch ATCA models on page 43](#)
- [FortiWeb models on page 44](#)

## FortiGate models

The following FortiGate models are released with FortiOS firmware. For information about supported FortiGate models on special branch releases of FortiOS firmware, see [FortiGate special branch models on page 32](#).

Model	Firmware Version
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3500F, FortiGate-3501F, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F <b>FortiGate 5000 Series:</b> FortiGate-5001E, FortiGate-5001E1 <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC <b>FortiWiFi:</b> FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-ARM64-AWS, FortiGate-ARM64-KVM, FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G	7.2

Model	Firmware Version
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3500F, FortiGate-3501F, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F,	7.0
<b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1	
<b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC	
<b>FortiWiFi:</b> FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE	
<b>FortiGate VM:</b> FortiGate-ARM64-KVM, FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager	
<b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen	
<b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G	

Model	Firmware Version
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F,	6.4
<b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1	
<b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC	
<b>FortiGate Hardware Low Encryption:</b> FortiGate-100D-LENC	
<b>FortiWiFi:</b> FWF-40F, FWF-40F-3G4G, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE	
<b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager	
<b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen	
<b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G	



Model	Firmware Version
<b>FortiGate:</b> FortiGate-30E, FortiGate-30E-3G4G-GBL, FortiGate-30E-3G4G-INTL, FortiGate-30E-3G4G-NAM, FortiGate-40F, FortiGate-40F-3G4G, FortiGate-50E, FortiGate-51E, FortiGate-52E, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-92D, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140D, FortiGate-140D-POE, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E <b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-2201E-ACDC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC <b>FortiGate Hardware Low Encryption:</b> FortiGate-100D-LENC <b>FortiWiFi:</b> FWF-30E, FWF-30E-3G4G-INTL, FWF-30E-3G4G-NAM, FWF-40F, FWF-40F-3G4G, FWF-50E, FWF-50E-2R, FWF-51E, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FortiWiFi-80F-2R-3G4G-DSL, FWF-81F-2R, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AWSONDEMAND, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-30D, FGR-35D, FGR-60F, FGR-60F-3G4G, FGR-90D	6.2

Model	Firmware Version
<b>FortiGate:</b> FortiGate-30D, FortiGate-30D-POE, FortiGate-30E, FortiGate-30E-3G4G-GBL, FortiGate-30E-3G4G-INTL, FortiGate-30E-3G4G-NAM, FortiGate-50E, FortiGate-51E, FortiGate-52E, FortiGate-60D, FortiGate-60D-POE, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-70D, FortiGate-70D-POE, FortiGate-80C, FortiGate-80CM, FortiGate-80D, FortiGate-80E, FortiGate-80E-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-90D, FortiGate-90D-POE, FortiGate-90E, FortiGate-91E, FortiGate-92D, FortiGate-94D-POE, FortiGate-98D-POE, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-101E, FortiGate-140D, FortiGate-140D-POE, FortiGate-140E, FortiGate-140E-POE, FortiGate-200D, FortiGate-200D-POE, FortiGate-200E, FortiGate-201E, FortiGate-240D, FortiGate-240D-POE, FortiGate-280D-POE, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600C, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800C, FortiGate-800D, FortiGate-900D, FortiGate-1000C, FortiGate-1000D, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3400E, FortiGate-3401E, FortiGate-3600C, FortiGate-3600E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E <b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 <b>FortiGate 6000 Series:</b> FortiGate-6000F, FortiGate-6300F, FortiGate-6301F, FortiGate-6500F, FortiGate-6501F <b>FortiGate 7000 Series:</b> FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E <b>FortiGate DC:</b> FortiGate-80C-DC, FortiGate-401E-DC, FortiGate-600C-DC, FortiGate-800C-DC, FortiGate-1000C-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600C-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-6000F-DC, FortiGate-6300F-DC, FortiGate-6301F-DC, FortiGate-6500F-DC, FortiGate-6501F-DC, FortiGate-7060E-8-DC <b>FortiGate Hardware Low Encryption:</b> FortiGate-80C-LENC, FortiGate-100D-LENC, FortiGate-600C-LENC, FortiGate-1000C-LENC <b>Note:</b> All license-based LENC is supported based on the FortiGate support list. <b>FortiWiFi:</b> FWF-30D, FWF-30D-POE, FWF-30E, FWF-30E-3G4G-INTL, FWF-30E-3G4G-NAM, FWF-50E, FWF-50E-2R, FWF-51E, FWF-60D, FWF-60D-POE, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-61E, FWF-80CM, FWF-81CM, FWF-90D, FWF-90D-POE, FWF-92D <b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AWSONDEMAND, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-30D, FGR-30D-ADSL-A, FGR-35D, FGR-60D, FGR-90D	6.0

Model	Firmware Version
<b>FortiGate:</b> FortiGate-30D, FortiGate-30D-POE, FortiGate-30E, FortiGate-30E-3G4G-INTL, FortiGate-30E-3G4G-NAM, FortiGate-50E, FortiGate-51E, FortiGate-52E, FortiGate-60D, FortiGate-60D-POE, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-61E, FortiGate-70D, FortiGate-70D-POE, FortiGate-80C, FortiGate-80CM, FortiGate-80D, FortiGate-80E, FortiGate-80E-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-90D, FortiGate-90D-POE, FortiGate-90E, FortiGate-91E, FortiGate-92D, FortiGate-94D-POE, FortiGate-98D-POE, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-101E, FortiGate-140D, FortiGate-140D-POE, FortiGate-140E, FortiGate-140E-POE, FortiGate-200D, FortiGate-200D-POE, FortiGate-200E, FortiGate-201E, FortiGate-240D, FortiGate-240D-POE, FortiGate-280D-POE, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600C, FortiGate-600D, FortiGate-800C, FortiGate-800D, FortiGate-900D, FortiGate-1000C, FortiGate-1000D, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3240C, FortiGate-3600C, FortiGate-3700D, FortiGate-3700DX, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E <b>FortiGate 5000 Series:</b> FortiGate-5001C, FortiGate-5001D, FortiGate-5001E <b>FortiGate DC:</b> FortiGate-80C-DC, FortiGate-600C-DC, FortiGate-800C-DC, FortiGate-800D-DC, FortiGate-1000C-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3240C-DC, FortiGate-3600C-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC <b>FortiGate Hardware Low Encryption:</b> FortiGate-80C-LENC, FortiGate-100D-LENC, FortiGate-600C-LENC, FortiGate-1000C-LENC <b>Note:</b> All license-based LENC is supported based on the FortiGate support list. <b>FortiWiFi:</b> FWF-30D, FWF-30D-POE, FWF-30E, FWF-30E-3G4G-INTL, FWF-30E-3G4G-NAM, FWF-50E, FWF-50E-2R, FWF-51E, FWF-60D, FWF-60D-POE, FWF-60E, FWF-61E, FWF-80CM, FWF-81CM, FWF-90D, FWF-90D-POE, FWF-92D <b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-AWS, FortiGate-VM64-AWSONDEMAND, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-30D, FGR-35D, FGR-60D, FGR-90D	5.6

## FortiGate special branch models

The following FortiGate models are released on special branches of FortiOS. FortiAnalyzer version 7.2.1 supports these models on the identified FortiOS version and build number.

For information about supported FortiGate models released with FortiOS firmware, see [FortiGate models on page 26](#).

## FortiOS 7.0

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-70F, FortiGate-71F	7.0.5	4530
FortiGate-3700F, FortiGate-3701F	7.0.6	6118
FortiGate-3000F	7.0.5	4451
FortiGate-3001F	7.0.5	4436

## FortiOS 6.4

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-400F, FortiGate-401F	6.4.8	5206
FortiGate-600F	6.4.8	5306
FortiGate-601F	6.4.8	5301
FortiGate-3500F	6.4.6	5886
FortiGate-3501F	6.4.6	6132
FortiGate-6000F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	6.4.8	1823
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC FortiGate-7000F, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC	6.4.8	1823
FortiWiFi-80F-2R-3G4G-DSL FortiWiFi-81F-2R-3G4G-DSL	6.4.7	5003

## FortiOS 6.2

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-80D	6.2.10	5168
FortiGate-200F, FortiGate-201F	6.2.8	7128
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.2.9	7197

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	6.2.9	7197
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	6.2.9	7197
FortiGate-4400F, FortiGate-4400F-DC FortiGate-4401F, FortiGate-4401F-DC	6.2.9	7197
FortiGate-6000F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	6.2.10	1211
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC FortiGate-7000F, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC	6.2.10	1211
FortiWiFi-81F-2R-3G4G-DSL	6.2.6	7219

## FortiOS 6.0

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-30E-3G4G-GBL	6.0	5486
FortiGate-40F, FortiGate-40F-3G4G	6.0	6887
FortiGate-41F	6.0.6	6445
FortiGate-41F-3G4G	6.0.6	6674
FortiGate-60F, FortiGate-61F	6.0	6890
FortiGate-100F, FortiGate-101F	6.0	6890
FortiGate-1100E, FortiGate-1100E-DC, FortiGate-1101E	6.0	6886
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.0	6889
FortiGate-2200E, FortiGate-2201E, FortiGate-2201E-ACDC	6.0	6888
FortiGate-3300E, FortiGate-3301E	6.0	6888
FortiWiFi-40F, FortiWiFi-40F-3G4G	6.0	6887

FortiGate Model	FortiOS Version	FortiOS Build
FortiWiFi-41F	6.0.6	6674
FortiWiFi-41F-3G4G	6.0.6	6445
FortiWiFi-60F, FortiWiFi-61F	6.0	6890

## FortiOS 5.6

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-5001E1	5.6	7796
FortiGate-6000F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	5.6.12	4286
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC	5.6.12	4286
FWF-60E-DSL, FWF-60E-DSLJ	5.6.8	4211
FortiOS-VM64-KVM	5.6	4081

## FortiCarrier models

The following FortiCarrier models are released with FortiCarrier firmware.

For information about supported FortiCarrier models on special branch releases of FortiCarrier firmware, see [FortiCarrier special branch models on page 37](#).

Model	Firmware Version
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-4200F, FortiCarrier-4201F, FortiCarrier-4400F, FortiCarrier-4401F, FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC, FortiCarrier-4200F-DC, FortiCarrier-4201F-DC, FortiCarrier-4400F-DC, FortiCarrier-4401F-DC <b>FortiCarrier-VM:</b> FortiCarrier-ARM64-AWS, FortiCarrier-ARM64-KVM, FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	7.2

Model	Firmware Version
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC <b>FortiCarrier-VM:</b> FortiCarrier-ARM64-KVM, FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen, FortiCarrier-ARM64-KVM	7.0
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC <b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	6.4
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC <b>FortiCarrier 6K and 7K:</b> FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6301F, FortiCarrier-6500F, FortiCarrier-6501F, FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7000F, FortiCarrier-7121F, FortiCarrier-7121F-2 <b>FortiCarrier 6K and 7K DC:</b> FortiCarrier-6000F-DC, FortiCarrier-6300F-DC, FortiCarrier-6301F-DC, FortiCarrier-6500F-DC, FortiCarrier-6501F-DC, FortiCarrier-7060E-8-DC, FortiCarrier-7121F-DC, FortiCarrier-7121F-2-DC <b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	6.2



Model	Firmware Version
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC <b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-AWSONDEMAND, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	6.0
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3240C, FortiCarrier-3600C, FortiCarrier-3700D, FortiCarrier-3700DX, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001C, FortiCarrier-5001D, FortiCarrier-5001E <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3240C-DC, FortiCarrier-3600C-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC <b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-AWSONDEMAND, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	5.6

## FortiCarrier special branch models

The following FortiCarrier models are released on special branches of FortiOS Carrier. FortiAnalyzer version 7.2.1 supports these models on the identified FortiOS Carrier version and build number.

For information about supported FortiCarrier models released with FortiOS Carrier firmware, see [FortiCarrier models on page 35](#).

### FortiCarrier 7.0

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-3700F FortiCarrier-3701F	7.0.6	6118
FortiCarrier-3000F	7.0.5	4451
FortiCarrier-3001F	7.0.5	4436

## FortiCarrier 6.4

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC FortiCarrier-7000F, , FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier- 7121F-DC	6.4.8	1823

## FortiCarrier 6.2

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-4200F, FortiCarrier-4200F-DC FortiCarrier-4201F, FortiCarrier-4201F-DC FortiCarrier-4400F, FortiCarrier-4400F-DC, FortiCarrier-4401F, FortiCarrier-4401F-DC	6.2.9	7197
FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC FortiCarrier-7000F, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2- DC, FortiCarrier-7121F-DC	6.2.10	1211

## FortiCarrier 6.0

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-VM64-Azure	6.0	5485

## FortiCarrier 5.6

FortiCarrier Model	FortiCarrier Version	FortiCarrier Build
FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC	5.6.12	4286

## FortiADC models

Model	Firmware Version
<b>FortiADC:</b> FortiADC-100F, FortiADC-120F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F <b>FortiADC VM:</b> FortiADC-VM	7.0
<b>FortiADC:</b> FortiADC-100F, FortiADC-120F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F <b>FortiADC VM:</b> FortiADC-VM	6.2
<b>FortiADC:</b> FortiADC-100F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F <b>FortiADC VM:</b> FortiADC-VM	6.0, 6.1

## FortiNDR and FortiAI models

Model	Firmware Version
<b>FortiAI:</b> FAI-3500F <b>FortiAI-VM:</b> FAI-VM, FAI-KVM	7.0
<b>FortiAI:</b> FAI-3500F <b>FortiAI-VM:</b> FAI-VM, FAI-KVM	1.5

## FortiAnalyzer models

Model	Firmware Version
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FAZ-3700G. <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWS-OnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.2
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.0
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000E, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-ALI-OnDemand, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWSOnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-GCP-OnDemand, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	6.4

## FortiAuthenticator models

Model	Firmware Version
<b>FortiAuthenticator:</b> FAC-200D, FAC-200E, FAC-300F, FAC-400C, FAC-400E, FAC-800F, FAC-1000C, FAC-1000D, FAC-2000E, FAC-3000D, FAC-3000E <b>FortiAuthenticator VM:</b> FAC-VM	6.2, 6.3, 6.4

## FortiCache models

Model	Firmware Version
<b>FortiCache:</b> FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3000E, FCH-3900E <b>FortiCache VM:</b> FCH-KVM, FCH-VM64	4.1, 4.2
<b>FortiCache:</b> FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3900E <b>FortiCache VM:</b> FCH-VM64	4.0

## FortiDDoS models

Model	Firmware Version
<b>FortiDDoS:</b> FortiDDoS-2000F	6.3
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F, <b>FortiDDoS VM:</b> FortiDDoS-VM	6.1, 6.2, 6.3

## FortiDeceptor models

Model	Firmware Version
<b>FortiDeceptor:</b> FDC-1000F, FDC-1000G <b>FortiDeceptor Rugged:</b> FDCR-100G <b>FortiDeceptor VM:</b> FDC-VM	4.2
<b>FortiDeceptor:</b> FDC-1000F, FDC-1000G <b>FortiDeceptor Rugged:</b> FDCR-100G <b>FortiDeceptor VM:</b> FDC-VM	4.1
<b>FortiDeceptor:</b> FDC-1000F, FDC-1000G <b>FortiDeceptor Rugged:</b> FDCR-100G <b>FortiDeceptor VM:</b> FDC-VM	4.0

## FortiFirewall models

Some of the following FortiFirewall models are released on special branches of FortiFirewall firmware. FortiAnalyzer version 7.2.1 supports these models on the identified FortiFirewall firmware version and build number.

Model	Firmware Version	Firmware Build
<b>FortiFirewall:</b> FortiFirewall-3980E <b>FortiFirewall DC:</b> FortiFirewall-3980E-DC	6.2	1262

Model	Firmware Version	Firmware Build
<b>FortiFirewall:</b> FortiFirewall-4200F	6.2.7	5141
<b>FortiFirewall:</b> FortiFirewall-4400F	6.2.7	5148

## FortiFirewallCarrier models

The following FortiFirewallCarrier models are released on special branches of FortiFirewallCarrier firmware. FortiAnalyzer version 7.2.1 supports these models on the identified FortiFirewallCarrier firmware version and build number.

Model	Firmware Version	Firmware Build
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-4200F, FortiFirewallCarrier-4400F	6.2.7	5148

## FortiMail models

Model	Firmware Version
<b>FortiMail:</b> FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-2000F, FE-3000F	7.2
<b>FortiMail:</b> FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-2000F, FE-3000D, FE-3000E, FE-3000F, FE-3200E <b>FortiMail VM:</b> FML-VM	7.0
<b>FortiMail:</b> FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-3000D, FE-3000E, FE-3200E <b>FortiMail VM:</b> FML-VM	6.4

## FortiNAC models

Model	Firmware Version
<b>FortiNAC:</b> FortiNAC-500, FortiNAC-600, FortiNAC-700, FortiNAC-C-1000C, FortiNAC-C-2000C, FortiNAC-Manager-550 <b>FortiNAC VM:</b> FortiNAC-C-VM, FortiNAC-M-VM	9.4
<b>FortiNAC:</b> FortiNAC-500, FortiNAC-600, FortiNAC-700, FortiNAC-C-1000C, FortiNAC-C-2000C, FortiNAC-Manager-550 <b>FortiNAC VM:</b> FortiNAC-C-VM, FortiNAC-CA-VM, FortiNAC-M-VM	9.1, 9.2

## FortiProxy models

Model	Firmware Version
<b>FortiProxy:</b> FPX-400E, FPX-2000E, FPX-4000E	7.0
<b>FortiProxy VM:</b> FortiProxy-AWS, FortiProxy-Azure, FortiProxy-GCP, FortiProxy-HyperV, FortiProxy-KVM, FortiProxy-VM64	
<b>FortiProxy:</b> FPX-400E, FPX-2000E, FPX-4000E	1.2, 2.0
<b>FortiProxy VM:</b> FortiProxy-KVM, FortiProxy-VM64	

## FortiSandbox models

Model	Firmware Version
<b>FortiSandbox:</b> FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3000F, FSA-3500D	4.2
<b>FortiSandbox DC:</b> FSA-1000F-DC	
<b>FortiSandbox-VM:</b> FortiSandbox-AWS, FortiSandbox-Cloud, FSA-VM	
<b>FortiSandbox:</b> FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3000F, FSA-3500D	4.0
<b>FortiSandbox DC:</b> FSA-1000F-DC	
<b>FortiSandbox-VM:</b> FortiSandbox-AWS, FortiSandbox-Cloud, FSA-VM	
<b>FortiSandbox:</b> FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3500D	3.2
<b>FortiSandbox DC:</b> FSA-1000F-DC	
<b>FortiSandbox-VM:</b> FortiSandbox-AWS, FSA-VM	

## FortiSOAR models

Model	Firmware Version
<b>FortiSOAR VM:</b> FortiSOAR-VM	6.4, 7.0, 7.2

## FortiSwitch ATCA models

Model	Firmware Version
<b>FortiController:</b> FTCL-5103B, FTCL-5903C, FTCL-5913C	5.2
<b>FortiSwitch-ATCA:</b> FS-5003A, FS-5003B	5.0
<b>FortiController:</b> FTCL-5103B	
<b>FortiSwitch-ATCA:</b> FS-5003A, FS-5003B	4.3

## FortiWeb models

Model	Firmware Version
<b>FortiWeb:</b> FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-2000E, FortiWeb-2000F, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3000F, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E, FortiWeb-4000F <b>FortiWeb VM:</b> FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	6.4, 7.0
<b>FortiWeb:</b> FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-2000E, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E <b>FortiWeb VM:</b> FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	6.3



# Resolved Issues

The following issues have been fixed in FortiAnalyzer version 7.2.1. To inquire about a particular bug, please contact [Customer Service & Support](#).

## Device Manager

Bug ID	Description
798197	In <i>Device Manager</i> , FortiAnalyzer does not show the color of the logging devices properly (red or green).
811627	FortiWeb FlexVM is not supported by FortiAnalyzer.
816072	In <i>Device Manager</i> , model device configured with pre-shared key is not auto authorized.
819664	In <i>Device Manager</i> , Average Log Rate is displayed zero for FortiGates HA Cluster.

## FortiSOC

Bug ID	Description
701751	FortiGate Connectors were disappearing from FortiSOC Connectors List.
769793	Incidents cannot be modified.
773382	Running AV scan playbook takes a long time to load for all the endpoints, and users cannot see any progress bar.
777901	EMS cloud playbooks failed due to the error connecting to EMS FortiClient Cloud.
783212	Error Message <i>403 Client Error</i> is seen when configuring FML connector under the <i>Connectors</i> .
814419	When creating or configuring a playbook from scratch for an incident, the task status failed because of a missing category.
821135	EMS connector status is inconsistent.

## FortiView

Bug ID	Description
754733	The <i>No entry found.</i> error is displayed when checking the <i>Top Cloud Applications</i> logs under <i>FortiView</i> .
754781	<i>FortiView</i> Widgets log out even if the auto-refresh feature is being used.
760228	<i>FortiView</i> displays higher bandwidth value than <i>Report</i> .
794491	SD-WAN widgets do not display data properly.
798471	<i>Top SD-WAN Device Throughput</i> widget is displaying wrong numbers.
818065	<i>FortiView Top Applications</i> view does not show any data.
818077	Top application axis labels are not displayed correctly in <i>Monitor</i> section.
822462	<i>Secure SD-WAN Monitor</i> devices are not sorted alphabetically like other widgets.
822471	<i>SD-WAN Performance Status</i> widget under the <i>Secure Monitor</i> displays gray intervals, even when data is available.

## Log View

Bug ID	Description
682584	FCT logging for Chromebook stops intermittently and can only be resumed by restarting FortiAnalyzer.
742643	Traffic logs for more than one day cannot be downloaded.
769430	The log browse device list does not display all devices.
779893	The <code>dstowner</code> field is not allowed for filter in traffic logs.
787988	Downloading high volume of logs takes a long time and fails at the end.
817761	Downloading the traffic logs with custom time in text format displays error 500.

## Others

Bug ID	Description
719298	FortiAnalyzer failed to provide data in API response to FortiPortal request.
750709	Policy Analyzer application exists on the MEA of FortiAnalyzer.

Bug ID	Description
773745	FortiAnalyzer should try to connect to FortiClient or <i>forticlient-emsproxy.forticloud.com</i> when enabling EMS Cloud.
798630	Typo in widget name <i>Top SD-WAN Device Throughout</i> .
804868	FortiAnalyzer log and logs-only backup do not work if using server-name instead of server IP address.
804934	Type mismatch error is displayed for the column <i>dstuuid</i> .
805509	FortiGates cannot display logs from FortiAnalyzer.
812730	There is an issue on HA member Synchronization on Azure Platform.
817639	FortiAnalyzer archive logs caused unexpected increase in the disk quota usage.
823294	SSH connection between FortiGate and FortiAnalyzer/FortiManager v7.0.4/7.2.1 or later fails due to <i>server_host_key_algorithms</i> mismatch.

## Reports

Bug ID	Description
754265	Scheduled reports are not generated as configured.
766123	The <i>Selected data binding is invalid</i> error is shown for <i>Data Binding</i> in the chart details for <i>Traffic statistic</i> .
769473	FortiAnalyzer displays the error message <i>At least one column is required</i> . when creating a join statement from temporary tables and mapping it to a chart.
770191	The SD-WAN internal and external throughput values are displayed incorrectly.
783172	Reports may only show 64 device report details after upgrade.
806284	FortiAnalyzer wrongly mixes and displays multiple device or customer info in the same report.
816975	Unable to upload the report to server by output profile.
817871	Session data is displayed improperly on predefined chart <i>Top 30 users by bandwidth and sessions</i> .
821794	Predefined dataset ( <i>fml-History-Top-Sender</i> ) result is not right with nested count.
824260	Failed to create reports using API request in FortiAnalyzer.

## System Settings

Bug ID	Description
669478	Several dev-type mismatches have been observed between CLI and GUI under log-forwarding configuration.
695968	In the local event logs, <i>Device Name</i> doesn't match the FortiAnalyzer's hostname.
734407	HA status does not display the DB inserting issue on the secondary member.
741288	SSO users cannot connect to the map server.
745468	Enabling the SNMP event <code>raid-changed</code> in CLI does not enable it on the GUI.
784290	Primary FortiAnalyzer shows the secondary FortiAnalyzer hostname incorrectly.
784345	FortiAnalyzer connects to map server and GeoIP server directly even when the web-proxy is enabled.
793006	When <i>Forward</i> server is disabled, user has no visibility on the log forwarding servers setting.
801936	FGFM access cannot be set for IPv6 interface when FortiAnalyzer has FIPS mode enabled.
804897	The Log forward configuration with IPv6 address destination cannot be set from the GUI.
813243	FortiAnalyzer log-forwarding unable to forward FortiManager events with Log-ID filter to syslog.
815644	In FortiAnalyzer, cannot configure log forwarding exclusions for FortiClient.

# Known Issues

The following issues have been identified in FortiAnalyzer version 7.2.1. To inquire about a particular bug or to report a bug, please contact [Fortinet Customer Service & Support](#).

## Device Manager

Bug ID	Description
814008	Sort function for logs and average log rate(logs/sec) does not work in <i>Device Manager</i> .
824296	FortiAnalyzer does not show the "root VDOM" under its <i>Device Manager</i> .
827276	FortiAnalyzer does not let all VDOMs to be added to the <i>Device Manager</i> if FortiGates has more than 10 VDOMs.
833448	The device SYSLOG-00000000 appears repeatedly even after being removed from the unregistered devices.
835653	The FortiGate's IP address and firmware version are not updated when FortiGates are added manually to a non-root ADOM.
837310	FortiAnalyzer does not show the correct IP addresses and firmware versions for its registered FortiGates.
838727	Log Status of the Devices are displayed red when the Primary has a zero lograte.
846904	Under the <i>Device Manager</i> , the Average Log Rates are not displayed.

## Event Management

Bug ID	Description
825422	FortiAnalyzer Event Handler does not trigger any alerts when "Log Field" has been set to "Virtual Domain (vd)".

## FortiSOC

Bug ID	Description
757650	Wrong device name (devname) is filled in event email notification.

Bug ID	Description
775589	FortiAnalyzer does not provide any details on status of Fabric Connectors.
833991	FortiOS connector does not display health status of the Security Fabric members.
848284	Despite having relevant event logs, the created playbook does not get triggered.
849070	Playbook run successfully on the FortiAnalyzer but there is not any stitches triggered on the FortiGate.

## FortiView

Bug ID	Description
744791	"Failed Authentication Attempts" logs under the <i>System</i> tab of <i>FortiView</i> are blanks.
841717	The Data displayed on <i>FortiView</i> is inconsistent with the exported " <i>Top Website Domains</i> " PDF report.
856094	Browsing time displays "0s" for 'streaming media and download' category for the <i>Top Website Categories</i> under the <i>FortiView's Applications &amp; Websites</i> tab.

## Log View

Bug ID	Description
696451	Detected files by Content Disarm and Reconstruction (CDR) cannot be stored/quarantined to FortiAnalyzer despite quarantine destination is set to FAZ.
712711	Under the <i>Log View</i> , the query result is incorrect when the value for the filter is empty.
816490	In <i>Log Browse</i> , for HA devices, only primary device's log files are displayed.
836777	When admin profile is set as <i>Read-Only</i> , <i>Add Filter</i> under the <i>Log View/FortiView</i> displays no fields.
837554	The Fabric log contains ": :ffff:" prefix in front of the value of any IPv4 related fields.
839350	Devices' entries under the <i>Log Group</i> of the <i>Log View</i> are not displayed.
858682	The data icon under the <i>Log View</i> for ADOM FortiMail/FortiWeb do not properly display the log details.

## Others

Bug ID	Description
779943	High memory usage has been observed when creating dataset or running reports on FortiAnalyzer.
809133	Several process crashes (logfwd/filefwd/clusterd), which have been observed when loading the devices from <i>Device Manager</i> , made FortiAnalyzer unable to show any logs.
818118	Logs between HA members are not synched.
822619	Missing values when retrieving logstats using the JSON API requests.
825927	FortiAnalyzer does not provide access to all available tiles under the FortiAuthenticator ADOM.
827787	The CPU and Disk I/O usage of the FortiAnalyzer appear to be constantly high.
829869	When FortiAnalyzer is working on Collector Mode, system storage size increases over time; hence, FortiAnalyzer might stop receiving new logs.
837657	Creating ADOMs using JSON API, default ADOM configs like report, datasets, charts, etc. are not created.
838031	FortiAnalyzer GUI does not display the "Rebuilding ADOM DB" in progress anymore.
839191	The HA <code>config-sync status</code> issue creates the sync failure frequently.
839910	The <code>diagnose test application oftpd</code> command does not display any outputs for some FortiGate devices registered on FortiAnalyzer.
841622	FortiAnalyzer does not download the IOC DB updates when FortiManager acts as the local FortiGuard Server.
846315	FortiAnalyzer does not display ADOM FortiNAC.
860113	The primary FortiAnalyzer can show the logs in <i>Log View</i> . The synchronization between primary and secondary fails and the secondary doesn't show the last logs.
919088	GUI may not work properly in Google Chrome and Microsoft Edge version 114.

## Reports

Bug ID	Description
704187	" <i>Bandwidth and Application</i> " Report's data does not match with the Top Application data on <i>FortiView</i> .
722233	The generated report does not display data but its dataset query contains data.

Bug ID	Description
764194	Playbooks <code>run_report</code> fails with <i>missing device(s)</i> if <i>Playbook Starter</i> as device filter is selected.
768843	FortiAnalyzer does not support importing outbreak alert reports to ADOM type FortiGate.
771072	Secure SD-WAN CSV report does not show device names for charts.
788801	" <i>Throughput utilization billing report</i> " does not display the complete data for the "yesterday" time-period.
835422	FortiAnalyzer does not display any data on its report when group filter and LDAP query is being used.
837395	"Show Top" & "Drilldown Top" preview features under the " <i>Edit Chart</i> " do not display the chart based on the selected values.
841750	The report does not display any data for its tables.
844563	Hodex Time shown on table chart does not match with the configured time period for the previous XX days in report.
844975	The command <code>execute remove reports</code> does not remove the reports.
848573	When specifying FortiWiFi as devices, " <i>SD-WAN Device Link Bandwidth</i> " and " <i>SD-WAN Device Rules Donut Bandwidth</i> " charts do not display any data.

## System Settings

Bug ID	Description
478401	FortiAnalyzer shows an unnecessary warning message "Analytic is using 0% of allocated disk space", which can be very confusing.
630654	Imported logs may not sync to slave.
752111	Traffic, Security, and Event logs section under the Logview tab are missing for Primary HA.
759601	FortiAnalyzer using Azure AD SAML SSO may show 'invalid_logout_response_error' after logout.
782431	SNMPv3 stopped working after upgrading.
803074	The sorting feature does not work correctly for storage info columns under the <i>System Settings</i> .
829015	"Privacy Masking" feature does not work properly for admins whose admin type utilizes "Remote Authentication Server".
832973	Analytics and Archive details are missing from "Edit Log Storage Policy".
837203	Unable to fetch logs between FortiAnalyzer devices due to Invalid cross-device link error.
842943	After upgrading FortiAnalyzer, "fortinet-ca2" is missing under the CA Certificates; this



Bug ID	Description
	prevents devices to establish connections to FortiAnalyzer.
849824	Under the Event's System logs, Adding Filter "Fortiguard web filter services are NOT reachable" does not display any logs.
853855	The log forwarding filter does not seem to work properly as expected on FortiAnalyzer.

# Appendix A - Default and maximum number of ADOMs supported

This section identifies the supported number of ADOMs for FortiAnalyzer hardware models and virtual machines.

See also the [FortiAnalyzer Data Sheet](#).

## Hardware models



For ADOM subscription licenses, FortiAnalyzer enforces the ADOM limits.

For hardware models that do not support the ADOM subscription license, ADOM limits are recommended, but not enforced.

FortiAnalyzer supports a default number of ADOMs based on hardware model.

Some hardware models support an ADOM subscription license. When you purchase an ADOM subscription license, you increase the number of supported ADOMs. For example, you can purchase an ADOM subscription license for the FAZ-3000G series, which allows you to use up to a maximum of 1200 ADOMs.

Other hardware models do not support the ADOM subscription license. For hardware models that do not support the ADOM subscription license, the default and maximum number of ADOMs is the same.

FortiAnalyzer Platform	Default number of ADOMs	ADOM license support?	Maximum number of ADOMs
Desktop models	1		1
150G Series	3		3
300F/300G and 400E Series	25		25
800F/800G and 1000F Series	50		50
2000E Series	250		250
3000F Series	500		500
3000G Series	500	✓	1200
3500F/3500G	500		500
3700F Series	1200		1200
3700G Series	1200	✓	10,000

## Virtual Machines



For subscription licenses, FortiAnalyzer enforces the ADOM limits.  
For perpetual licenses, ADOM limits are recommended, but not enforced.

### FortiAnalyzer subscription license

Five (5) ADOMs are included with FortiAnalyzer VM subscription licenses. Additional ADOMs can be purchased with an ADOM subscription license.

### FortiAnalyzer perpetual license

Recommended maximum number of ADOMs supported:

FortiAnalyzer Platform	Default number of ADOMs
1 GB/Day < License <= 5 GB/Day	10
5 GB/Day < License <= 25 GB/Day	25
25 GB/Day < License <= 100 GB/Day	50
100 GB/Day < License <= 500 GB/Day	250
500 GB/Day < License <= 1000 GB/Day	500
1000 GB/Day < License <= 5000 GB/Day	800
License > 5000 GB/Day	1200



FortiAnalyzer VM subscription and perpetual licenses are stackable.



[www.fortinet.com](http://www.fortinet.com)

Copyright© 2024 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.