

Release Notes

FortiAnalyzer 7.2.0



FORTINET DOCUMENT LIBRARY

<https://docs.fortinet.com>

FORTINET VIDEO LIBRARY

<https://video.fortinet.com>

FORTINET BLOG

<https://blog.fortinet.com>

CUSTOMER SERVICE & SUPPORT

<https://support.fortinet.com>

FORTINET TRAINING & CERTIFICATION PROGRAM

<https://www.fortinet.com/training-certification>

FORTINET TRAINING INSTITUTE

<https://training.fortinet.com>

FORTIGUARD LABS

<https://www.fortiguard.com>

END USER LICENSE AGREEMENT

<https://www.fortinet.com/doc/legal/EULA.pdf>

FEEDBACK

Email: techdoc@fortinet.com



January 5th, 2024

FortiAnalyzer 7.2.0 Release Notes

05-720-783052-20240105

TABLE OF CONTENTS

Change Log	5
FortiAnalyzer 7.2.0 Release	6
Supported models	6
FortiAnalyzer VM subscription license	6
Management extension applications	7
Supported models for MEA	7
Minimum system requirements	7
FortiRecorder	8
Supported models for FortiRecorder	8
Supported cameras	8
Special Notices	10
FortiAnalyzer 7.2.3 and later firmware on FortiGuard	10
Fortinet verified publisher docker image	10
Hyperscale firewall mode	12
Modifying the interface status with the CLI	12
Citrix XenServer default limits and upgrade	12
FortiAnalyzer VM upgrade requires more memory	13
Maximum ADOM limits for FortiAnalyzer	13
Port 8443 reserved	13
Hyper-V FortiAnalyzer-VM running on an AMD CPU	13
SSLv3 on FortiAnalyzer-VM64-AWS	13
Upgrade Information	15
Downgrading to previous firmware versions	15
Firmware image checksums	15
FortiAnalyzer VM firmware	15
SNMP MIB files	17
Product Integration and Support	18
Supported software	18
Web browsers	19
FortiOS and FortiOS Carrier	19
FortiADC	19
FortiNDR and FortiAI	19
FortiAnalyzer	19
FortiAuthenticator	20
FortiCache	20
FortiClient	20
FortiDDoS	20
FortiDeceptor	20
FortiFirewall and FortiFirewallCarrier	21
FortiMail	21
FortiManager	21
FortiNAC	21
FortiProxy	21

FortiSandbox	22
FortiSOAR	22
FortiSwitch ATCA	22
FortiWeb	22
Virtualization	22
Feature support	23
Language support	24
Supported models	24
FortiGate models	25
FortiGate special branch models	27
FortiCarrier models	29
FortiADC models	30
FortiNDR and FortiAI models	31
FortiAnalyzer models	31
FortiAuthenticator models	32
FortiCache models	32
FortiDDoS models	32
FortiDeceptor models	33
FortiFirewall models	33
FortiFirewallCarrier models	33
FortiMail models	33
FortiNAC models	34
FortiProxy models	34
FortiSandbox models	34
FortiSOAR models	34
FortiSwitch ATCA models	35
FortiWeb models	35
Resolved Issues	36
FortiView	36
Log View	36
Others	36
Reports	37
System Settings	37
Known Issues	38
Event Management	38
FortiView	38
Log View	38
Others	39
Reports	39
System Settings	39
Appendix A - Default and maximum number of ADOMs supported	40
Hardware models	40
Virtual Machines	41
FortiAnalyzer subscription license	41
FortiAnalyzer perpetual license	41

Change Log

Date	Change Description
2022-04-11	Initial release.
2022-04-14	Updated Known Issues on page 38.
2022-04-28	Updated Known Issues on page 38.
2022-05-04	Updated FortiAnalyzer models on page 31.
2022-07-19	Updated Upgrade Information on page 15.
2022-09-06	Updated Known Issues on page 38.
2022-10-28	Updated Appendix A - Default and maximum number of ADOMs supported on page 40.
2022-11-03	Updated FortiGate models on page 25.
2022-11-23	Updated FortiGate special branch models on page 27.
2022-12-01	Updated Management extension applications on page 7.
2023-03-23	Updated FortiOS and FortiOS Carrier on page 19.
2023-04-27	Updated FortiManager on page 21.
2023-09-25	Updated FortiClient on page 20.
2024-01-05	Added the <i>FortiAnalyzer 7.2.3 and later firmware on FortiGuard</i> Special Notice.

FortiAnalyzer 7.2.0 Release

This document provides information about FortiAnalyzer version 7.2.0 build 1124.



The recommended minimum screen resolution for the FortiAnalyzer GUI is 1920 x 1080. Please adjust the screen resolution accordingly. Otherwise, the GUI may not display properly.

This section includes the following topics:

- [Supported models on page 6](#)
- [FortiAnalyzer VM subscription license on page 6](#)
- [Management extension applications on page 7](#)
- [FortiRecorder on page 8](#)

Supported models

FortiAnalyzer version 7.2.0 supports the following models:

FortiAnalyzer	FAZ-150G, FAZ-300F, FAZ-300G, FAZ-400E, FAZ-800F, FAZ-800G, FAZ-1000F, FAZ-2000E, FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F, and FAZ-3700G.
FortiAnalyzer VM	FAZ_DOCKER, FAZ-VM64, FAZ-VM64-AWS, FAZ-VM64-AWSOnDemand, FAZ-VM64-Azure, FAZ-VM64-GCP, FAZ-VM64-IBM, FAZ-VM64-HV (including Hyper-V 2016, 2019), FAZ-VM64-KVM, FAZ-VM64-OPC, FAZ-VM64-Xen (for both Citrix and Open Source Xen),



FAZ-300F supports the subscription license for the SOC service. However performance may be impacted because FAZ-300F has fewer resources and a smaller CPU than other FortiAnalyzer models that support the SOC service.

FortiAnalyzer VM subscription license

The FortiAnalyzer VM subscription license supports FortiAnalyzer version 6.4.1 and later. For information about supported firmware, see [FortiAnalyzer VM firmware on page 15](#).

See also [Appendix A - Default and maximum number of ADOMs supported on page 40](#).



You can use the FortiAnalyzer VM subscription license with new FAZ-VM installations. For existing FAZ-VM installations, you can migrate to a FortiAnalyzer VM subscription license, starting with FortiAnalyzer 7.0.1. See the [FortiAnalyzer 7.0.1 VM License Migration Guide](#).

Management extension applications

The following section describes supported models and minimum system requirements for management extension applications (MEA) in FortiAnalyzer 7.2.0.



FortiAnalyzer uses port TCP/443 or TCP/4443 to connect to the Fortinet registry and download MEAs. Ensure that the port is also open on any upstream FortiGates. For more information about incoming and outgoing ports, see the [FortiAnalyzer 7.0 Ports Guide](#).

Supported models for MEA

You can use any of the following FortiAnalyzer models as a host for management extension applications:

FortiAnalyzer	FAZ-3000F, FAZ-3000G, FAZ-3500E, FAZ-3500F, FAZ-3500G, FAZ-3700F, and FAZ-3700G.
FortiAnalyzer VM	FAZ_DOCKER, FAZ-VM64, FAZ-VM64-AWS, FAZ-VM64-AWSOnDemand, FAZ-VM64-Azure, FAZ-VM64-GCP, FAZ-VM64-IBM, FAZ-VM64-HV (including Hyper-V 2016, 2019), FAZ-VM64-KVM, FAZ-VM64-OPC, FAZ-VM64-Xen (for both Citrix and Open Source Xen),

Minimum system requirements

By default FortiAnalyzer VMs use the following system resource settings:

- 4 vCPU
- 8 GB RAM
- 500 GB disk space

Starting with FortiAnalyzer 7.0.0, RAM and CPU is capped at 50% for MEAs. (Use the `config system docker` command to view the setting.) If FortiAnalyzer has 8 CPUs and 16 GB RAM, then only 4 CPUs and 8 GB RAM are available to MEAs by default, and the 4 CPUs and 8 GB RAM are used for all enabled MEAs.

Some MEAs have minimum system requirements that require you to increase system resources. The following table identifies the minimum requirements for each MEA as well as the recommended system resources to function well in a production environment.

MEA minimum system requirements apply only to the individual MEA and do not take into consideration any system requirements for resource-sensitive FortiAnalyzer features or multiple, enabled MEAs.

Management Extension Application	Minimum system requirements	Recommended system resources for production*
FortiSIEM	<ul style="list-style-type: none"> • 4 vCPU • 4 GB RAM • No change for disk storage 	<ul style="list-style-type: none"> • 12 vCPU • 16 GB RAM • 500 GB
FortiSOAR	<ul style="list-style-type: none"> • 4 vCPU • 8 GB RAM • 500 GB disk storage 	<ul style="list-style-type: none"> • 16 vCPU • 64 GB RAM • No change for disk storage

*The numbers in the *Recommended system resources for production* column are a combination of the default system resource settings for FortiAnalyzer plus the recommended system requirements for the MEA.

FortiRecorder

This section identifies what FortiAnalyzer models support the FortiRecorder module and what FortiCamera models are supported.

Supported models for FortiRecorder

Below is a list of the FortiAnalyzer appliances that support the FortiRecorder module.

Platform	Maximum number of cameras
FAZ-300F	6
FAZ-400E	12
FAZ-800F	16
FAZ-1000F	50
FAZ-2000E	40
FAZ-3000F	50
FAZ-3500G	50
FAZ-3700F	60

Supported cameras

The FortiRecorder module supports the following FortiCamera models:

- FCM-CB20
- FCM-FD20
- FCM-FD20B
- FCM-FD40

- FCM-MB40
- FCM-MD20
- FCM-MD40
- FCM-OB30

Special Notices

This section highlights some of the operational changes that administrators should be aware of in FortiAnalyzer version 7.2.0.

FortiAnalyzer 7.2.3 and later firmware on FortiGuard

Starting in FortiAnalyzer 7.2.1, a setup wizard executes to prompt the user for various configuration steps and registration with FortiCare. During the execution, the FortiAnalyzer unit attempts to communicate with FortiGuard for a list of FortiAnalyzer firmware images currently available on FortiGuard – older and newer.

In the case of FortiAnalyzer 7.2.2, a bug in the GUI prevents the wizard from completing and prevents the user from accessing the FortiAnalyzer unit. The issue has been fixed in 7.2.3 and later and a CLI command has been added to bypass the setup wizard at login time.

```
config system admin setting
    set firmware-upgrade-check disable
end
```


Fortinet has not uploaded FortiAnalyzer 7.2.3 and later firmware to FortiGuard in order to work around the GUI bug, however, the firmware is available for download from the [Fortinet Support website](#).

Fortinet verified publisher docker image


FortiAnalyzer 7.0.1 docker image is available for download from Fortinet's Verified Publisher public repository on dockerhub.

To download the FortiAnalyzer image from dockerhub:


1. Go to dockerhub at <https://hub.docker.com/>.
The dockerhub home page is displayed.

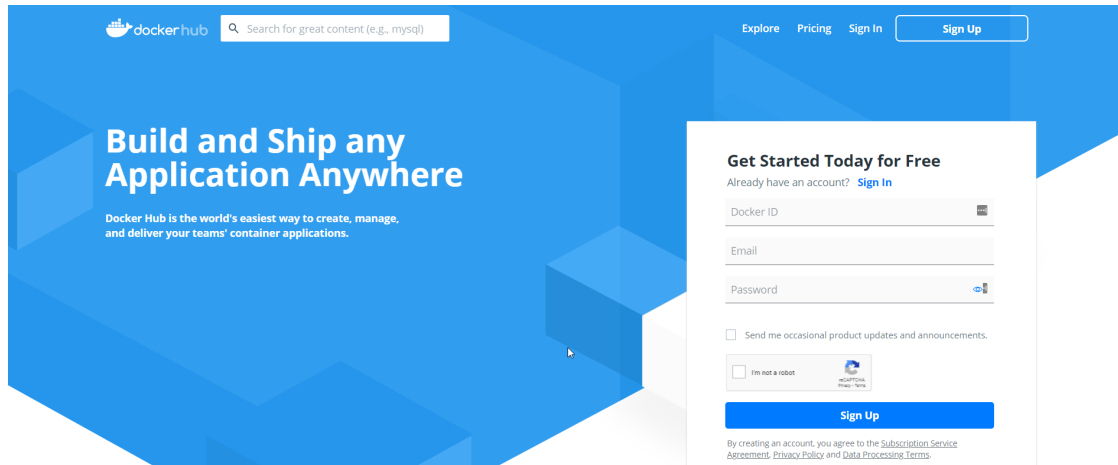

2. In the banner, click *Explore*.
3. In the search box, type *Fortinet*, and press *Enter*.
The *fortinet/fortimanager* and *fortinet/fortianalyzer* options are displayed.

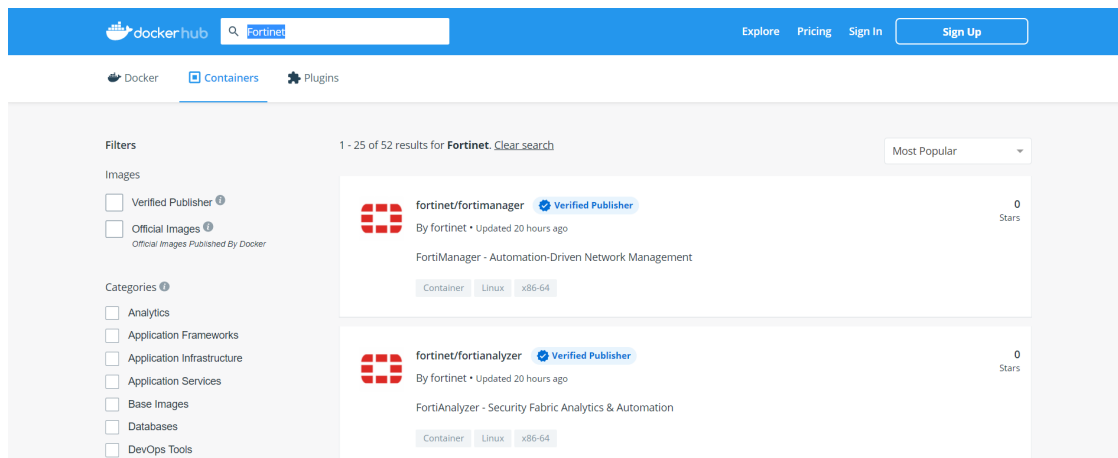

4. Click *fortinet/fortianalyzer*.
The *fortinet/fortianalyzer* page is displayed, and two tabs are available: *Overview* and *Tags*. The *Overview* tab is selected by default.

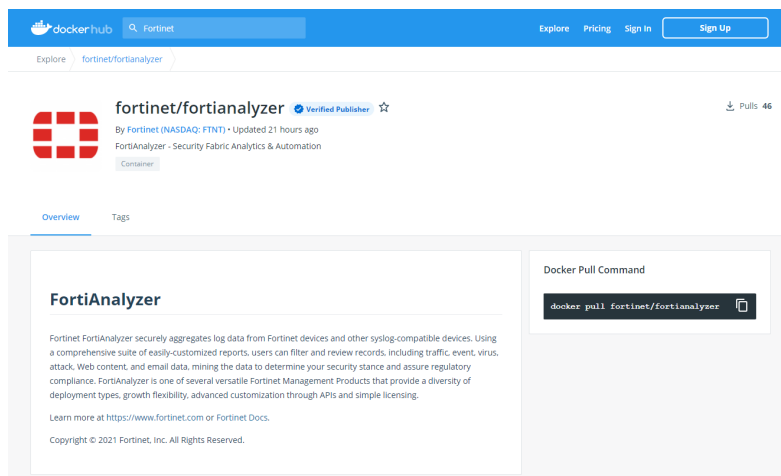

5. On the *Overview* tab, copy the docker pull command, and use it to download the image.
The CLI command from the *Overview* tab points to the latest available image. Use the *Tags* tab to access different versions when available.

Hyperscale firewall mode

FortiAnalyzer does not support logs from the following models when they have hyperscale firewall mode and netflow enabled:

- FortiGate-1800F
- FortiGate-1801F
- FortiGate-2600F
- FortiGate-2601F
- FortiGate-4200F
- FortiGate-4201F
- FortiGate-4400F
- FortiGate-4401F

FortiAnalyzer only supports logs when the normal firewall mode with standard FortiGate logging are enabled.

Modifying the interface status with the CLI

Starting in version 7.0.1, the CLI to modify the interface status has been changed from `up/down` to `enable/disable`.

For example:

```
config system interface
  edit port2
    set status <enable/disable>
  next
end
```

Citrix XenServer default limits and upgrade

Citrix XenServer limits ramdisk to 128M by default. However the FAZ-VM64-XEN image is larger than 128M. Before updating to FortiAnalyzer 6.4, increase the size of the ramdisk setting on Citrix XenServer.

To increase the size of the ramdisk setting:

1. On Citrix XenServer, run the following command:
`xenstore-write /mh/limits/pv-ramdisk-max-size 536,870,912`
2. Confirm the setting is in effect by running `xenstore-ls`.

`limits = ""`
`pv-kernel-max-size = "33554432"`

```
pv-ramdisk-max-size = "536,870,912"  
boot-time = ""  
-----
```

3. Remove the pending files left in `/run/xen/pygrub`.



The ramdisk setting returns to the default value after rebooting.

FortiAnalyzer VM upgrade requires more memory

When upgrading FortiAnalyzer VM units from FortiAnalyzer 6.2.x to FortiAnalyzer 6.4.0 and later, the upgrade may fail because of memory allocation.

Workaround: Before upgrading FortiAnalyzer VM to FortiAnalyzer 6.4.0 and later, change the memory allocation to 8 GB of RAM.

Maximum ADOM limits for FortiAnalyzer

FortiAnalyzer hardware devices and VMs display a warning when the maximum number of ADOMs is reached or exceeded. The platform does not enforce the limit; however, adding more ADOMs may affect the performance of the unit. For more details, see [Appendix A - Default and maximum number of ADOMs supported on page 40](#).

Port 8443 reserved

Port 8443 is reserved for https-logging from FortiClient EMS for Chromebooks. See also [FortiAnalyzer 7.0 Ports Reference](#) on the Docs Library.

Hyper-V FortiAnalyzer-VM running on an AMD CPU

A Hyper-V FAZ-VM running on a PC with an AMD CPU may experience a kernel panic. Fortinet recommends running VMs on an Intel-based PC.

SSLv3 on FortiAnalyzer-VM64-AWS

Due to known vulnerabilities in the SSLv3 protocol, FortiAnalyzer-VM64-AWS only enables TLSv1 by default. All other models enable both TLSv1 and SSLv3. If you wish to disable SSLv3 support, please run:

```
config system global
    set ssl-protocol tlsv1
end
```

Upgrade Information



Prior to upgrading your FortiAnalyzer, please review the FortiAnalyzer Upgrade Guide in detail as it includes all of the necessary steps and associated details required to upgrade your FortiAnalyzer device or VM.

See [FortiAnalyzer 7.2.0 Upgrade Guide](#).

You can upgrade FortiAnalyzer 7.0.0 or later to 7.2.0.

This section contains the following topics:

- [Downgrading to previous firmware versions on page 15](#)
- [Firmware image checksums on page 15](#)
- [FortiAnalyzer VM firmware on page 15](#)
- [SNMP MIB files on page 17](#)

Downgrading to previous firmware versions

FortiAnalyzer does not provide a full downgrade path. You can downgrade to a previous firmware release by using the GUI or CLI, but doing so results in configuration loss. A system reset is required after the firmware downgrade process has completed. To reset the system, use the following CLI commands via a console port connection:

```
execute reset {all-settings | all-except-ip}  
execute format {disk | disk-ext4 | disk-ext3}
```

Firmware image checksums

The MD5 checksums for all Fortinet software and firmware releases are available at the Customer Service & Support portal, <https://support.fortinet.com>. After logging in, go to *Download > Firmware Image Checksums*, enter the image file name including the extension, and select *Get Checksum Code*.

FortiAnalyzer VM firmware

Fortinet provides FortiAnalyzer VM firmware images for Amazon AWS, Amazon AWSOnDemand, Citrix and Open Source XenServer, Linux KVM, Microsoft Hyper-V Server, and VMware ESX/ESXi virtualization environments.

Amazon Web Services

- The 64-bit Amazon Machine Image (AMI) is available on the AWS marketplace.

Citrix XenServer and Open Source XenServer

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.OpenXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the QCOW2 file for the Open Source Xen Server.
- `.out.CitrixXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the Citrix XenServer Virtual Appliance (XVA), Virtual Hard Disk (VHD), and OVF files.

Google Cloud Platform

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.gcp.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

Linux KVM

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.kvm.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains QCOW2 that can be used by qemu.

Microsoft Azure

The files for Microsoft Azure have AZURE in the filenames, for example `<product>_VM64_AZURE-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.

Microsoft Hyper-V Server

The files for Microsoft Hyper-V Server have HV in the filenames, for example, `<product>_VM64_HV-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.hyperv.zip`: Download the package for a new FortiAnalyzer VM installation. This package contains a Virtual Hard Disk (VHD) file for Microsoft Hyper-V Server.



Microsoft Hyper-V 2016 is supported.

Oracle Private Cloud

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.opc.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

VMware ESX/ESXi

- `.out`: Download the 64-bit firmware image to upgrade your existing VM installation.
- `.ovf.zip`: Download either the 64-bit package for a new VM installation. This package contains an Open Virtualization Format (OVF) file for VMware and two Virtual Machine Disk Format (VMDK) files used by the OVF file during deployment.



For more information, see the [FortiAnalyzer Data Sheet](#) available on the Fortinet web site. VM installation guides are available in the [Fortinet Document Library](#).

SNMP MIB files

You can download the *FORTINET-FORTIMANAGER-FORTIANALYZER.mib* MIB file in the firmware image file folder. The Fortinet Core MIB file is located in the main FortiAnalyzer version 5.00 file folder.

Product Integration and Support

This section lists FortiAnalyzer 7.2.0 support of other Fortinet products. It also identifies what FortiAnalyzer features are supported for managed platforms and what languages FortiAnalyzer supports. It also lists which Fortinet models can be managed by FortiAnalyzer.

The section contains the following topics:

- [Supported software on page 18](#)
- [Feature support on page 23](#)
- [Language support on page 24](#)
- [Supported models on page 24](#)

Supported software

FortiAnalyzer 7.2.0 supports the following software:

- [Web browsers on page 19](#)
- [FortiOS and FortiOS Carrier on page 19](#)
- [FortiADC on page 19](#)
- [FortiNDR and FortiAI on page 19](#)
- [FortiAnalyzer on page 19](#)
- [FortiAuthenticator on page 20](#)
- [FortiCache on page 20](#)
- [FortiClient on page 20](#)
- [FortiDDoS on page 20](#)
- [FortiDeceptor on page 20](#)
- [FortiFirewall and FortiFirewallCarrier on page 21](#)
- [FortiMail on page 21](#)
- [FortiManager on page 21](#)
- [FortiNAC on page 21](#)
- [FortiProxy on page 21](#)
- [FortiSandbox on page 22](#)
- [FortiSOAR on page 22](#)
- [FortiSwitch ATCA on page 22](#)
- [FortiWeb on page 22](#)
- [Virtualization on page 22](#)



To confirm that a device model or firmware version is supported by the current firmware version running on FortiAnalyzer, run the following CLI command:

```
diagnose dvm supported-platforms list
```



Always review the Release Notes of the supported platform firmware version before upgrading your device.

Web browsers

FortiAnalyzer 7.2.0 supports the following web browsers:

- Microsoft Edge 80 (80.0.361 or later)
- Mozilla Firefox version 96
- Google Chrome version 97

Other web browsers may function correctly, but are not supported by Fortinet.

FortiOS and FortiOS Carrier



The *FortiAnalyzer Release Notes* communicate support for FortiOS versions that are available at the time of the FortiAnalyzer 7.2.0 release. For additional information about other supported FortiOS versions, please refer to the FortiAnalyzer compatibility chart in the [Fortinet Document Library](#).

See [FortiAnalyzer compatibility with FortiOS](#).

FortiAnalyzer 7.2.0 supports the following versions of FortiOS and FortiOS Carrier:

- 7.2.0
- 7.0.0 to 7.0.11
- 6.4.0 to 6.4.12

FortiADC

FortiAnalyzer 7.2.0 supports the following versions of FortiADC:

- 7.0.0 and later
- 6.2.0 and later
- 6.1.0 and later

FortiNDR and FortiAI

FortiAnalyzer 7.2.0 supports the following versions of FortiNDR (formerly FortiAI):

- 1.5 and later

FortiAnalyzer

FortiAnalyzer 7.2.0 supports the following versions of FortiAnalyzer:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

FortiAuthenticator

FortiAnalyzer 7.2.0 supports the following versions of FortiAuthenticator:

- 6.4.0 and later
- 6.3.0 and later
- 6.2.0 and later

FortiCache

FortiAnalyzer 7.2.0 supports the following versions of FortiCache:

- 4.2.0 and later
- 4.1.0 and later
- 4.0.0 and later

FortiClient

FortiAnalyzer 7.2.0 supports the following versions of FortiClient:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later
- 6.2.1 and later

When using FortiClient with FortiAnalyzer, it is recommended to upgrade both to their latest versions. The versions between the two products should match. For example, if using FortiAnalyzer 7.2.0, use FortiClient 7.2.0.

FortiDDoS

FortiAnalyzer 7.2.0 supports the following versions of FortiDDoS:

- 6.3.0 and later
- 6.2.0 and later
- 6.1.0 and later

Limited support. For more information, see [Feature support on page 23](#).

FortiDeceptor

FortiAnalyzer 7.2.0 supports the following versions of FortiDeceptor:

- 4.1 and later
- 4.0 and later

- 3.3 and later

FortiFirewall and FortiFirewallCarrier

FortiAnalyzer 7.2.0 supports the following versions of FortiFirewall and FortiFirewallCarrier:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

FortiMail

FortiAnalyzer 7.2.0 supports the following versions of FortiMail:

- 7.0.0 and later
- 6.4.0 and later
- 6.2.0 and later

FortiManager

FortiAnalyzer 7.2.0 supports the following versions of FortiManager:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

FortiNAC

FortiAnalyzer 7.2.0 supports the following versions of FortiNAC:

- 9.2.0 and later
- 9.1.0 and later
- 8.8.0 and later

FortiProxy

FortiAnalyzer 7.2.0 supports the following versions of FortiProxy:

- 7.0.0 to 7.0.5
- 2.0.0 to 2.0.5
- 1.2.0 to 1.2.13
- 1.1.0 to 1.1.6
- 1.0.0 to 1.0.7

FortiSandbox

FortiAnalyzer 7.2.0 supports the following versions of FortiSandbox:

- 4.2.0 and later
- 4.0.0 and later
- 3.2.0 and later
- 3.1.0 and later

FortiSOAR

FortiAnalyzer 7.2.0 supports the following versions of FortiSOAR:

- 7.0.0 and later
- 6.4.0 and later
- 6.0.0 and later

FortiSwitch ATCA

FortiAnalyzer 7.2.0 supports the following versions of FortiSwitch ATCA:

- 5.2.0 and later
- 5.0.0 and later
- 4.3.0 and later

FortiWeb

FortiAnalyzer 7.2.0 supports the following versions of FortiWeb:

- 7.0.0 and later
- 6.4.0 and later
- 6.3.0 and later

Virtualization

FortiAnalyzer 7.2.0 supports the following virtualization software:

- Amazon Web Service AMI, Amazon EC2, Amazon EBS
- Citrix XenServer 7.2
- Google Cloud Platform
- Linux KVM Redhat 7.1
- Microsoft Azure
- Microsoft Hyper-V Server 2012, 2016, and 2019
- Nutanix AHV (AOS 5.10.5)
- OpenSource XenServer 4.2.5

- Oracle Private Cloud
- VMware ESXi versions 5.0, 5.5, 6.0, 6.5 , 6.7, and 7.0

Feature support

The following table lists FortiAnalyzer feature support for log devices.

Platform	Log View	FortiView	Event Management	Reports
FortiGate	✓	✓	✓	✓
FortiCarrier	✓	✓	✓	✓
FortiADC	✓		✓	
FortiAI	✓	✓	✓	✓
FortiAnalyzer	✓		✓	
FortiAuthenticator	✓			
FortiCache	✓		✓	✓
FortiClient registered to FortiGate	✓	✓		✓
FortiClient registered to FortiClient EMS	✓	✓		✓
FortiDDoS	✓	✓	✓	✓
FortiDeceptor	✓			
FortiFirewall	✓	✓	✓	✓
FortiMail	✓		✓	✓
FortiManager	✓		✓	
FortiNAC	✓			
FortiProxy	✓		✓	✓
FortiSandbox	✓		✓	✓
FortiSOAR	✓		✓	✓
FortiWeb	✓		✓	✓
Syslog	✓		✓	✓

Language support

The following table lists FortiAnalyzer language support information.

Language	GUI	Reports
English	✓	✓
Chinese (Simplified)	✓	✓
Chinese (Traditional)	✓	✓
French	✓	✓
Hebrew		✓
Hungarian		✓
Japanese	✓	✓
Korean	✓	✓
Portuguese		✓
Russian		✓
Spanish		✓

To change the FortiAnalyzer language setting, go to *System Settings > Admin > Admin Settings*, in *Administrative Settings > Language* select the desired language on the drop-down menu. The default value is *Auto Detect*.

Russian, Hebrew, and Hungarian are not included in the default report languages. You can create your own language translation files for these languages by exporting a predefined language from FortiAnalyzer, modifying the text to a different language, saving the file as a different language name, and then importing the file into FortiAnalyzer. For more information, see the *FortiAnalyzer Administration Guide*.

Supported models

The following tables list which FortiGate, FortiCarrier, FortiDDoS, FortiAnalyzer, FortiMail, FortiSandbox, FortiSwitch ATCA, FortiWeb, FortiCache, FortiProxy, and FortiAuthenticator models and firmware versions that can be managed by a FortiManager or send logs to a FortiManager running version 7.2.0.



Software license activated LENC devices are supported, if their platforms are in the supported models list. For example, support of FG-3200D indicates support of FG-3200D-LENC.

This section contains the following topics:

- [FortiGate models on page 25](#)
- [FortiGate special branch models on page 27](#)
- [FortiCarrier models on page 29](#)
- [FortiADC models on page 30](#)

- [FortiNDR and FortiAI models on page 31](#)
- [FortiAnalyzer models on page 31](#)
- [FortiAuthenticator models on page 32](#)
- [FortiCache models on page 32](#)
- [FortiDDoS models on page 32](#)
- [FortiDeceptor models on page 33](#)
- [FortiFirewall models on page 33](#)
- [FortiFirewallCarrier models on page 33](#)
- [FortiMail models on page 33](#)
- [FortiNAC models on page 34](#)
- [FortiProxy models on page 34](#)
- [FortiSandbox models on page 34](#)
- [FortiSOAR models on page 34](#)
- [FortiSwitch ATCA models on page 35](#)
- [FortiWeb models on page 35](#)

FortiGate models

The following FortiGate models are released with FortiOS firmware. For information about supported FortiGate models on special branch releases of FortiOS firmware, see [FortiGate special branch models on page 27](#).

Model	Firmware Version
FortiGate: FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60EDSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300E, FortiGate301E, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500E, FortiGate-501E, FortiGate600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate3960E, FortiGate-3980E FortiGate 5000 Series: FortiGate-5001E, FortiGate-5001E1 FortiGate DC: FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3960E-DC, FortiGate-3980E-DC FortiWiFi: FortiWiFi-40F, FortiWiFi-40F-3G4G, FortiWiFi-60E, FortiWiFi-60E-DSL, FortiWiFi-60E-DSLJ, FortiWiFi-60F, FortiWiFi-61E, FortiWiFi-61F, FortiWiFi-80F-2R, FortiWiFi-81F-2R, FortiWiFi-81F-2R-3G4G-POE, FortiWiFi-81F-2R-POE	7.2

Model	Firmware Version
FortiGate VM: FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-AZURE, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-ARM64-KVM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGateVM64-Xen, FortiGate-VMX-Service-Manager, FortiGate-VM64-IBM FortiOS: FortiOS-VM64, FortiOS-VM64-HV, FortiOS-VM64-KVM, FortiOS-VM64-Xen FortiGateRugged: FortiGateRugged-60F, FortiGateRugged-60F-3G4G	
FortiGate: FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60EDSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate3960E, FortiGate-3980E FortiGate 5000 Series: FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 FortiGate DC: FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-DC, FortiGate-3980E-DC FortiWiFi: FortiWiFi-40F, FortiWiFi-40F-3G4G, FortiWiFi-60E, FortiWiFi-60E-DSL, FortiWiFi-60E-DSLJ, FortiWiFi-60F, FortiWiFi-61E, FortiWiFi-61F, FortiWiFi-80F-2R, FortiWiFi-81F-2R, FortiWiFi-81F-2R-3G4G-POE, FortiWiFi-81F-2R-POE FortiGate VM: FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-AZURE, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-ARM64-KVM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGateVM64-Xen, FortiGate-VMX, FortiGate-VMX-Service-Manager, FortiGate-VM64-IBM FortiOS: FortiOS-VM64, FortiOS-VM64-HV, FortiOS-VM64-KVM, FortiOS-VM64-Xen FortiGateRugged: FortiGateRugged-60F, FortiGateRugged-60F-3G4G	7.0

Model	Firmware Version
FortiGate: FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-90E, FortiGate-91E, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E FortiGate 5000 Series: FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 FortiGate DC: FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-DC, FortiGate-3980E-DC FortiGate Hardware Low Encryption: FortiGate-100D-LENC FortiWiFi: FortiWiFi-40F, FortiWiFi-40F-3G4G, FortiWiFi-60E, FortiWiFi-60E-DSL, FortiWiFi-60E-DSLJ, FortiWiFi-60F, FortiWiFi-61E, FortiWiFi-61F, FortiGate VM: FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-AZURE, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-GCP, FortiGate-VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-Xen, FortiGate-VMX, FortiGate-VMX-Service-Manager, FortiGate-VM64-IBM FortiOS: FortiOS-VM64, FortiOS-VM64-HV, FortiOS-VM64-KVM, FortiOS-VM64-Xen FortiGateRugged: FortiGateRugged-60F, FortiGateRugged-60F-3G4G	6.4

FortiGate special branch models

The following FortiGate models are released on special branches of FortiOS. FortiAnalyzer version 7.2.0 supports these models on the identified FortiOS version and build number.

For information about supported FortiGate models released with FortiOS firmware, see [FortiGate models on page 25](#).

FortiOS 7.0

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	7.0	Build 291 and special branch 4334

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-3500F FortiGate-3501F	7.0	Build 294 and special branch 4344
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	7.0	Build 291 and special branch 4334
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	7.0	Build 291 and special branch 4334
FortiGate-4400F, FortiGate-4400F-DC FortiGate-4401F, FortiGate-4401F-DC	7.0	Build 291 and special branch 4334

FortiOS 6.4

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.4.8	6165
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	6.4.8	6165
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	6.4.8	6165
FortiGate-80F-POE, FortiGate-81F-POE	6.4.7	5944
FortiWiFi-80F-2R FortiWiFi-81F-2R FortiWiFi-81F-2R-3G4G-POE FortiWiFi-81F-2R-POE	6.4.7	5944
FortiGate-3500F	6.4.6	5886
FortiGate-3501F	6.4.6	6132
FortiGate-4400F, FortiGate-4400F-DC FortiGate-4401F, FortiGate-4401F-DC	6.4.6	5868
FortiGate-6000F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	6.4.6	1766
FortiGate-7000E, FortiGate-7000F	6.4.6	1766

FortiOS 6.2

FortiGate Model	FortiOS Version	FortiOS Build
FortiGate-80D	6.2.10	5168
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.2.9	7197
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	6.2.9	7197
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	6.2.9	7197
FortiGate-4400F, FortiGate-4400F-DC	6.2.9	7197
FortiGate-4401F, FortiGate-4401F-DC	6.2.9	7197
FortiWiFi-80F-2R-3G4G-DSL FortiWiFi-81F-2R-3G4G-DSL	6.2.6	7219
FortiWiFi-81F-2R-3G4G-POE	6.2.6	7099
FortiWiFi-81F-2R-3G4G-POE	6.2.6	7099

FortiCarrier models

Model	Firmware Version
FortiCarrier: FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001E, FortiCarrier-5001E1 FortiCarrier-DC: FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC FortiCarrier-VM: FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	7.2
FortiCarrier: FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 FortiCarrier-DC: FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC	7.0

Model	Firmware Version
FortiCarrier-VM: FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen, FortiCarrier-ARM64-KVM	
FortiCarrier: FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 FortiCarrier-DC: FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC FortiCarrier-VM: FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	6.4
FortiCarrier: FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 FortiCarrier-DC: FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC FortiCarrier 6K and 7K: FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6301F, FortiCarrier-6500F, FortiCarrier-6501F, FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7000F, FortiCarrier-7121F, FortiCarrier-7121F-2 FortiCarrier 6K and 7K DC: FortiCarrier-6000F-DC, FortiCarrier-6300F-DC, FortiCarrier-6301F-DC, FortiCarrier-6500F-DC, FortiCarrier-6501F-DC, FortiCarrier-7060E-8-DC, FortiCarrier-7121F-DC, FortiCarrier-7121F-2-DC FortiCarrier-VM: FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	6.2

FortiADC models

Model	Firmware Version
FortiADC: FortiADC-100F, FortiADC-120F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F FortiADC VM: FortiADC-VM	7.0

Model	Firmware Version
FortiADC: FortiADC-100F, FortiADC-120F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F FortiADC VM: FortiADC-VM	6.2
FortiADC: FortiADC-100F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F FortiADC VM: FortiADC-VM	6.0, 6.1

FortiNDR and FortiAI models

Model	Firmware Version
FortiAI: FAI-3500F FortiAI-VM: FAI-VM, FAI-KVM	1.5

FortiAnalyzer models

Model	Firmware Version
FortiAnalyzer: FortiAnalyzer-150G, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FAZ-3700G. FortiAnalyzer VM: FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWS-OnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.2
FortiAnalyzer: FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E FortiAnalyzer VM: FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.0

Model	Firmware Version
FortiAnalyzer: FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-1000E, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E FortiAnalyzer VM: FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-ALI-OnDemand, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWSOnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-GCP-OnDemand, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	6.4

FortiAuthenticator models

Model	Firmware Version
FortiAuthenticator: FAC-200D, FAC-200E, FAC-300F, FAC-400C, FAC-400E, FAC-800F, FAC-1000C, FAC-1000D, FAC-2000E, FAC-3000D, FAC-3000E FortiAuthenticator VM: FAC-VM	6.2, 6.3, 6.4

FortiCache models

Model	Firmware Version
FortiCache: FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3000E, FCH-3900E FortiCache VM: FCH-KVM, FCH-VM64	4.1, 4.2
FortiCache: FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3900E FortiCache VM: FCH-VM64	4.0

FortiDDoS models

Model	Firmware Version
FortiDDoS: FortiDDoS-2000F	6.3
FortiDDoS: FortiDDoS-200F, FortiDDoS-1500F, FortiDDoS VM: FortiDDoS-VM	6.1, 6.2, 6.3

FortiDeceptor models

Model	Firmware Version
FortiDeceptor: FDC-1000F, FDC-1000G FortiDeceptor Rugged: FDCR-100G FortiDeceptor VM: FDC-VM	4.1
FortiDeceptor: FDC-1000F, FDC-1000G FortiDeceptor Rugged: FDCR-100G FortiDeceptor VM: FDC-VM	4.0
FortiDeceptor: FDC-1000F, FDC-3000D FortiDeceptor VM: FDC-VM	3.3

FortiFirewall models

Some of the following FortiFirewall models are released on special branches of FortiFirewall firmware. FortiAnalyzer version 7.2.0 supports these models on the identified FortiFirewall firmware version and build number.

Model	Firmware Version	Firmware Build
FortiFirewall: FortiFirewall-3980E FortiFirewall DC: FortiFirewall-3980E-DC	6.2	1262
FortiFirewall: FortiFirewall-4200F	6.2.7	5141
FortiFirewall: FortiFirewall-4400F	6.2.7	5148

FortiFirewallCarrier models

The following FortiFirewallCarrier models are released on special branches of FortiFirewallCarrier firmware. FortiAnalyzer version 7.2.0 supports these models on the identified FortiFirewallCarrier firmware version and build number.

Model	Firmware Version	Firmware Build
FortiFirewallCarrier: FortiFirewallCarrier-4200F, FortiFirewallCarrier-4400F	6.2.7	5148

FortiMail models

Model	Firmware Version
FortiMail: FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-2000F, FE-3000D, FE-3000E, FE-3000F, FE-3200E FortiMail VM: FML-VM	7.0

Model	Firmware Version
FortiMail: FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-3000D, FE-3000E, FE-3200E FortiMail VM: FML-VM	6.2, 6.4

FortiNAC models

Model	Firmware Version
FortiNAC: FortiNAC-500, FortiNAC-600, FortiNAC-700, FortiNAC-C-1000C, FortiNAC-C-2000C, FortiNAC-Manager-550 FortiNAC VM: FortiNAC-C-VM, FortiNAC-CA-VM, FortiNAC-M-VM	8.8, 9.1, 9.2

FortiProxy models

Model	Firmware Version
FortiProxy: FPX-400E, FPX-2000E, FPX-4000E FortiProxy VM: FortiProxy-AWS, FortiProxy-Azure, FortiProxy-GCP, FortiProxy-HyperV, FortiProxy-KVM, FortiProxy-VM64	7.0
FortiProxy: FPX-400E, FPX-2000E, FPX-4000E FortiProxy VM: FortiProxy-KVM, FortiProxy-VM64	1.2, 2.0

FortiSandbox models

Model	Firmware Version
FortiSandbox: FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3000F, FSA-3500D FortiSandbox DC: FSA-1000F-DC FortiSandbox-VM: FortiSandbox-AWS, FortiSandbox-Cloud, FSA-VM	4.0
FortiSandbox: FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3500D FortiSandbox DC: FSA-1000F-DC FortiSandbox-VM: FortiSandbox-AWS, FSA-VM	3.1, 3.2

FortiSOAR models

Model	Firmware Version
FortiSOAR VM: FortiSOAR-VM	6.0, 6.4, 7.0

FortiSwitch ATCA models

Model	Firmware Version
FortiController: FTCL-5103B, FTCL-5903C, FTCL-5913C	5.2
FortiSwitch-ATCA: FS-5003A, FS-5003B FortiController: FTCL-5103B	5.0
FortiSwitch-ATCA: FS-5003A, FS-5003B	4.3

FortiWeb models

Model	Firmware Version
FortiWeb: FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-2000E, FortiWeb-2000F, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3000F, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E, FortiWeb-4000F FortiWeb VM: FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	6.4, 7.0
FortiWeb: FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-2000E, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E FortiWeb VM: FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	6.3

Resolved Issues

The following issues have been fixed in FortiAnalyzer version 7.2.0. To inquire about a particular bug, please contact [Customer Service & Support](#).

FortiView

Bug ID	Description
720908	FortiAnalyzer does not display DOS related logs under FortiView.
778978	The "Device filter" under the <i>FortiView > Secure SD-WAN Monitor</i> does not show the proper data.
792161	Permission error dispute of having write access is displayed when creating subnet on Fabric View.

Log View

Bug ID	Description
708842	FortiAnalyzer fails to complete FortiGate log query when filter is set using drop down menu with value entered manually.
752407	FortiAnalyzer <i>Log View</i> filter vanishes after displaying log details and returns to the log page with filter.
781113	The custom view should list all the used filters.

Others

Bug ID	Description
766485	FortiAnalyzer frequently generates error log with message "service:geoip, fgd server 'gip.fortinet.net' was unreachable."
778841	Users should be able to trim or clear kernel logs.
756833	FortiAnalyzer's HA is not supported on OCI (Oracle Cloud).

Reports

Bug ID	Description
759572	The default WiFi report does not display the WiFi clients when APs are in the bridged mode.
766505	Report's header may not be repositioned.
774764	The exported report chart should not return error for "Top Resource Usage Drilldown".
779945	Report cover page date color may not change according to setting.
781238	Default font setting change is not reflected in the portrait report cover title.
781240	SSL VPN Web Mode duration predefined dataset is incorrectly there are multiple sessions.
794020	Unable delete an incident if the attached report was deleted from Shell.

System Settings

Bug ID	Description
693584	Syslog server can only send via UDP, and not TCP with TLS option configured.
752979	When changing the unit of allocated disk utilization to GB or TB, FortiAnalyzer always displays the unit in MB.
759809	FortiAnalyzer should have Time zone information for local logs.
771397	The information/notification popups do not close automatically after the completion of any task.
774553	FortiAnalyzer's GUI login "Force to change password upon next log on" feature not working.

Known Issues

The following issues have been identified in FortiAnalyzer version 7.2.0. To inquire about a particular bug or to report a bug, please contact [Fortinet Customer Service & Support](#).

Event Management

Bug ID	Description
803225	FortiAnalyzer may generate duplicate events on blacklist logs which are found after IOC rescan.

FortiView

Big ID	Description
641596	FortiAnalyzer may show "No Data" in "User Vulnerabilities Summary" widget.
768270	Secure SD-WAN Monitor shows 'No Data' if only HA member having the SD-WAN logs.
781460	Adding filters and drill down return an error, "Invalid params:" will show for chart or list for <i>Top Threats</i> .

Log View

Bug ID	Description
771086	FortiAnalyzer displays <i>Invalid log file format</i> error message when importing log backup to FortiAnalyzer.
779893	"dstowner" field is not allowed for filter in traffic logs.
799928	FortiAnalyzer is not able to receive Chromebook FortiClient logs.

Others

Bug ID	Description
773745	FortiAnalyzer should try to connect to FortiClient or forticlient-emsproxy.forticloud.com when enabling EMS cloud.

Reports

Bug ID	Description
764194	Playbooks run_report fails with "missing device(s)" if "Playbook Starter" as devices filter is selected.
766123	"Selected data binding is invalid" is shown for "Data Binding" in the chart details for "Traffic statistic".
771072	Secure SD-WAN CSV report does not show device names for charts.
779952	Cyber Threat Assessment should show IPS attack Count 0 when there are no IPS logs.
783172	Reports may only show 64 devices report details after upgrade.

System Settings

Bug ID	Description
734001	FortiAnalyzer HA may randomly fail-over.
748107	Additional timestamp, tz field, is being added to forwarded logs from FortiAnalyzer.

Appendix A - Default and maximum number of ADOMs supported

This section identifies the supported number of ADOMs for FortiAnalyzer hardware models and virtual machines.

See also the [FortiAnalyzer Data Sheet](#).

Hardware models



For ADOM subscription licenses, FortiAnalyzer enforces the ADOM limits.

For hardware models that do not support the ADOM subscription license, ADOM limits are recommended, but not enforced.

FortiAnalyzer supports a default number of ADOMs based on hardware model.

Some hardware models support an ADOM subscription license. When you purchase an ADOM subscription license, you increase the number of supported ADOMs. For example, you can purchase an ADOM subscription license for the FAZ-3000G series, which allows you to use up to a maximum of 1200 ADOMs.

Other hardware models do not support the ADOM subscription license. For hardware models that do not support the ADOM subscription license, the default and maximum number of ADOMs is the same.

FortiAnalyzer Platform	Default number of ADOMs	ADOM license support?	Maximum number of ADOMs
Desktop models	1		1
150G Series	3		3
300F/300G and 400E Series	25		25
800F/800G and 1000F Series	50		50
2000E Series	250		250
3000F Series	500		500
3000G Series	500	✓	1200
3500F/3500G	500		500
3700F Series	1200		1200
3700G Series	1200	✓	10,000

Virtual Machines



For subscription licenses, FortiAnalyzer enforces the ADOM limits.
For perpetual licenses, ADOM limits are recommended, but not enforced.

FortiAnalyzer subscription license

Five (5) ADOMs are included with FortiAnalyzer VM subscription licenses. Additional ADOMs can be purchased with an ADOM subscription license.

FortiAnalyzer perpetual license

Recommended maximum number of ADOMs supported:

FortiAnalyzer Platform	Default number of ADOMs
1 GB/Day < License <= 5 GB/Day	10
5 GB/Day < License <= 25 GB/Day	25
25 GB/Day < License <= 100 GB/Day	50
100 GB/Day < License <= 500 GB/Day	250
500 GB/Day < License <= 1000 GB/Day	500
1000 GB/Day < License <= 5000 GB/Day	800
License > 5000 GB/Day	1200



FortiAnalyzer VM subscription and perpetual licenses are stackable.



www.fortinet.com

Copyright© 2024 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.