


Hyper-V Installation Guide

FortiSIEM 7.3.4

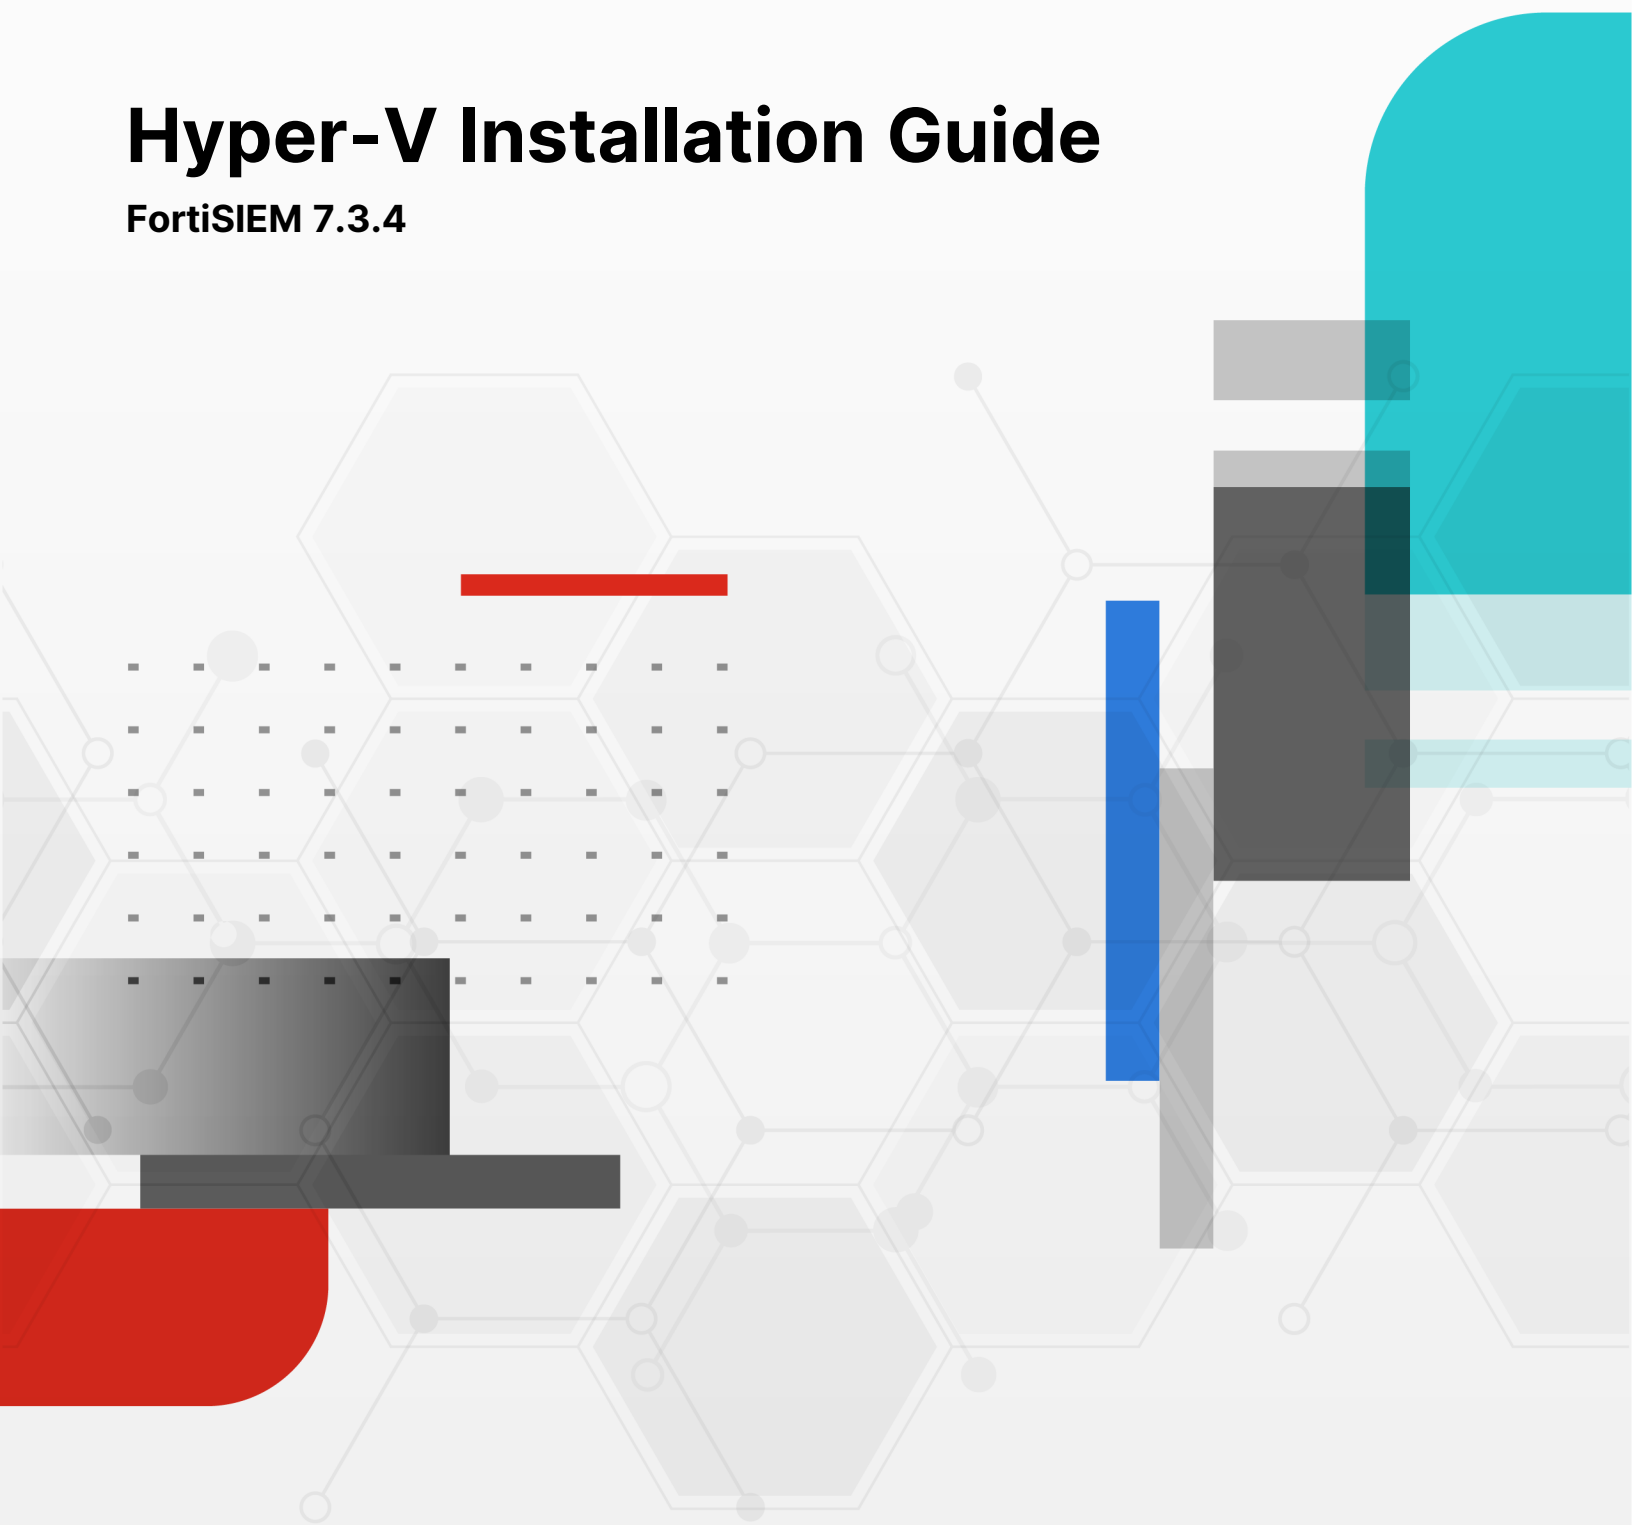

FORTINET DOCUMENT LIBRARY

<https://docs.fortinet.com>

FORTINET VIDEO LIBRARY

<https://video.fortinet.com>

FORTINET BLOG

<https://blog.fortinet.com>

CUSTOMER SERVICE & SUPPORT

<https://support.fortinet.com>

FORTINET TRAINING & CERTIFICATION PROGRAM

<https://www.fortinet.com/training-certification>

FORTINET TRAINING INSTITUTE

<https://training.fortinet.com>

FORTIGUARD LABS

<https://www.fortiguard.com>

END USER LICENSE AGREEMENT

<https://www.fortinet.com/doc/legal/EULA.pdf>

FEEDBACK

Email: techdoc@fortinet.com



01/27/2026

FortiSIEM 7.3.4 Hyper-V Installation Guide

TABLE OF CONTENTS

Change Log	4
Fresh Installation	5
Pre-Installation Checklist	5
All-in-one Installation	6
Download Compressed FortiSIEM VHDX File	7
Create FortiSIEM VM in Hyper-V	7
Start FortiSIEM from Hyper-V Manager	16
Configure FortiSIEM	17
Upload the FortiSIEM License	25
Configure an Event Database	25
Final Check	26
Cluster Installation	27
Install Supervisor	28
Install Workers	30
Register Workers	31
Create ClickHouse Topology (Optional)	32
Install Collectors	33
Register Collectors	33
Install Manager	37
Register Instances to Manager	37
Install Log	40

Change Log

Date	Change Description
12/16/2024	Release of FortiSIEM - Hyper-V Installation Guide for 7.3.0.
03/04/2025	Release of FortiSIEM - Hyper-V Installation Guide for 7.3.1.
03/21/2025	Release of FortiSIEM - Hyper-V Installation Guide for 7.3.2.
07/15/2025	Release of FortiSIEM - Hyper-V Installation Guide for 7.3.3.
07/29/2025	Release of FortiSIEM - Hyper-V Installation Guide for 7.3.4.
09/30/2025	Release of FortiSIEM - Hyper-V Installation Guide for 7.3.5.

Fresh Installation

- [Pre-Installation Checklist](#)
- [All-in-one Installation](#)
- [Cluster Installation](#)

Pre-Installation Checklist

Before you begin, check the following:

- Ensure that your system can connect to the network. You will be asked to provide a DNS Server and a host that can be resolved by the DNS Server and can respond to a ping. The host can either be an internal host or a public domain host like google.com.
- Choose deployment type – Enterprise or Service Provider. The Service Provider deployment provides multi-tenancy.
- Determine whether FIPS should be enabled
- Choose install type:
 - All-in-one with FortiSIEM Manager
 - Cluster with Manager, Supervisor and Workers
 - All-in-one with Supervisor only, or
 - Cluster with Supervisor and Workers
- Choose storage type for Supervisor, Worker, and/or Collector
 - Online storage - There are 4 choices
 - ClickHouse - Recommended for most deployments. Please see [ClickHouse Reference Architecture](#) for more information.



If you plan to use ClickHouse cluster, the Worker nodes will be defined as Keeper, Data or Query nodes. The Supervisor and Worker nodes can operate as a Keeper, Data or Query nodes. This is discussed in the [ClickHouse Reference Architecture](#), [Supervisor/Worker Nodes Running ClickHouse Functions](#) and [Configuring ClickHouse Topology](#).

- EventDB on local disk
 - EventDB on NFS
 - Elasticsearch
- Archive storage – There are 2 choices
 - EventDB on NFS
 - HDFS
- Determine hardware requirements:

Node	vCPU	RAM	Local Disks (Minimum Requirements)
Manager	Minimum – 16 Recommended - 32	Minimum • 24GB Recommended • 32GB	OS – 25GB OPT – 200GB CMDDB – 100GB SVN – 60GB
Supervisor (All in one)	Minimum – 12 Recommended - 32	Minimum • without UEBA – 24GB • with UEBA - 32GB Recommended • without UEBA – 32GB • with UEBA - 64GB	OS – 25GB OPT – 100GB CMDDB – 60GB SVN – 60GB Local Event database – based on need
Supervisor (Cluster)	Minimum – 12 Recommended - 32	Minimum • without UEBA – 24GB • with UEBA - 32GB Recommended • without UEBA – 32GB • with UEBA - 64GB	OS – 25GB OPT – 100GB CMDDB – 60GB SVN – 60GB
Workers	Minimum – 8 Recommended - 16	Minimum – 16GB Recommended – 24GB	OS – 25GB OPT – 100GB
Collector	Minimum – 4 Recommended – 8 (based on load)	Minimum – 4GB Recommended – 8GB	OS – 25GB OPT – 100GB

- If your Online event database is external (e.g. EventDB on NFS or Elasticsearch), then you must configure external storage before proceeding to FortiSIEM deployment.
 - For NFS deployment, see [here](#).
 - For Elasticsearch deployment, see [here](#).
- If your Online event database is internal, that is, inside Supervisor or Worker nodes, then you need to determine the size of the disks based on your EPS and event retention needs.
 - For EventDB on local disk, see [here](#).
 - For ClickHouse, see [here](#).
- For OPT - 100GB, the 100GB disk for /opt will consist of a single disk that will split into 2 partitions, /OPT and swap. The partitions will be created and managed by FortiSIEM when `configFSM.sh` runs.

All-in-one Installation

This is the simplest installation with a single Virtual Appliance. If storage is external, then you must configure external storage before proceeding with installation.

- [Download Compressed FortiSIEM VHDX File](#)
- [Create FortiSIEM VM in Hyper-V](#)


- Start FortiSIEM from Hyper-V Manager
- Configure FortiSIEM
- Upload the FortiSIEM License
- Configure an Event Database
- Final Check

Download Compressed FortiSIEM VHDX File


1. Go to the Fortinet Support website <https://support.fortinet.com> to download the Hyper-V package `FSM_Full_All_HYPERV_7.3.4_build0387.zip`. See [Downloading FortiSIEM Products](#) for more information on downloading products from the support website.
2. Download and uncompress the all-in-one package used for Super/Worker and Collector (using [7-Zip tool](#)) to the location where you want to install the image.

Create FortiSIEM VM in Hyper-V


1. Launch Hyper-V Manager on your Microsoft Windows 2012 R2, 2016, 2019 or 2022 Server with Hyper-V installed.
2. Click **Action > New > Virtual Machine**, then Click **Next**.

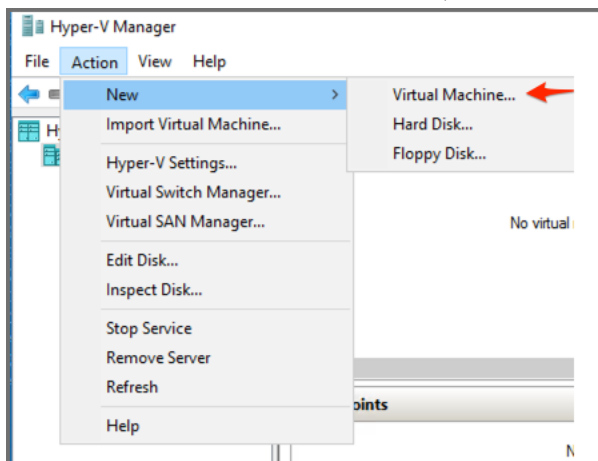


3. In the Before You Begin screen, click **Next**.

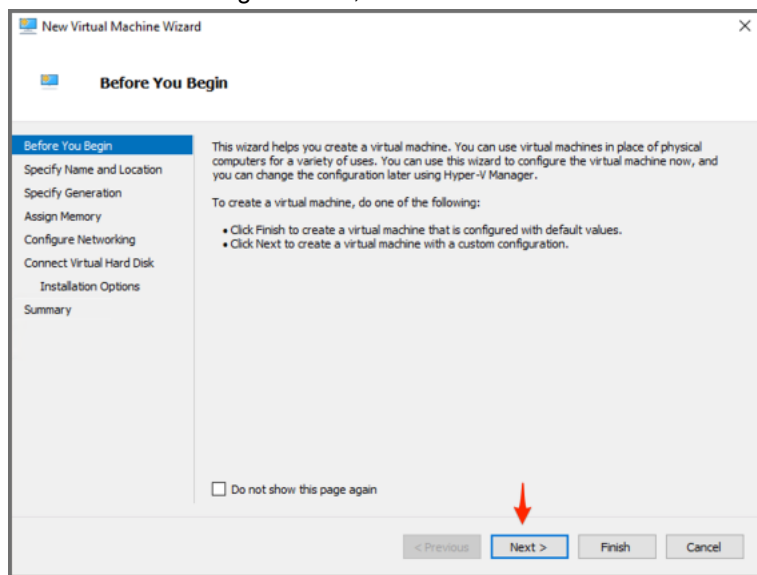


4. Specify the **Name** of the Virtual Machine, for example:

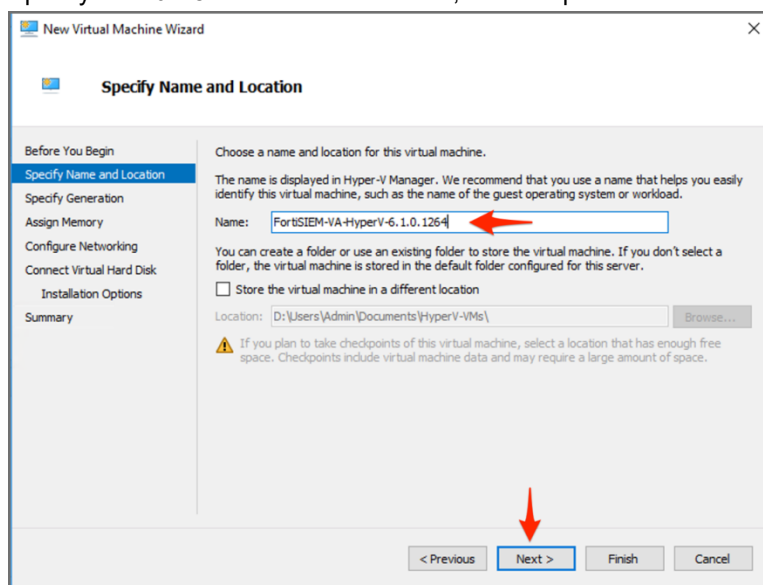


5. Specify the **Generation** type (choose **Generation 1**), for example:

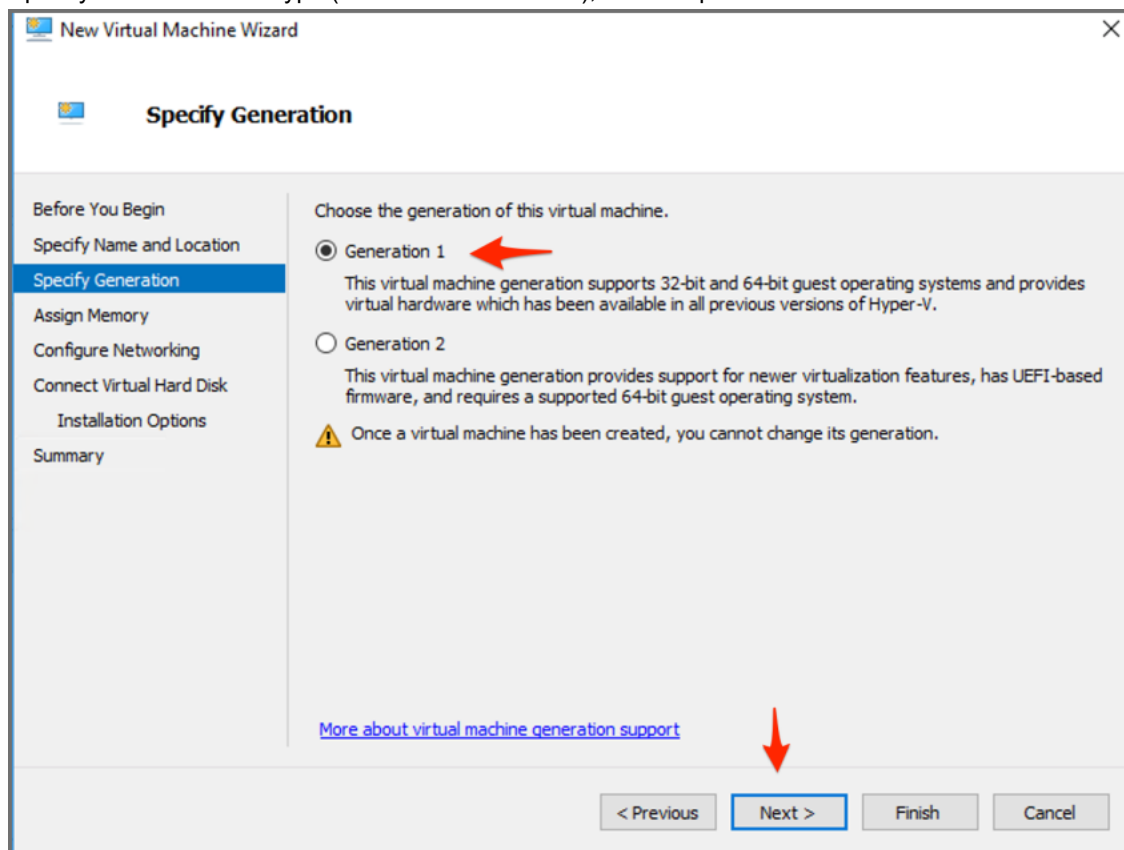


6. Add the amount of memory as per hardware requirements, then click **Next**.

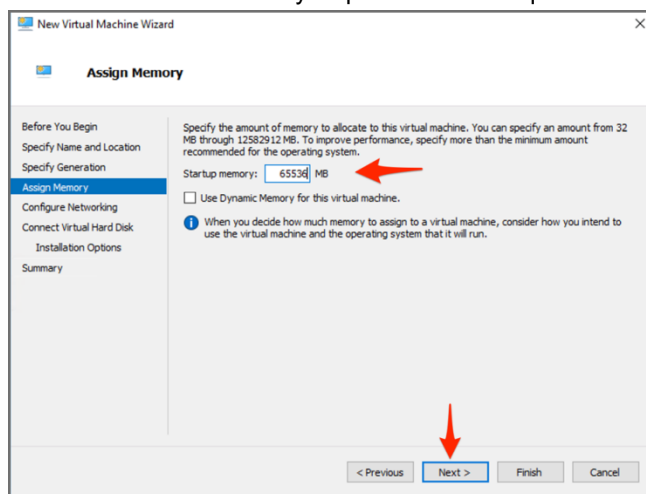


7. Configure Networking and select the virtual switch in your Hyper-V environment. Click **Next**.

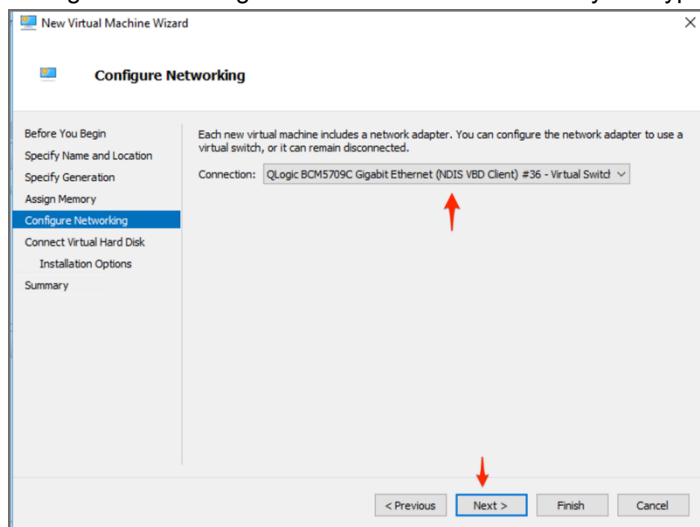


8. In Connect Virtual Hard Disk, select **Use an existing hard disk**, and choose the FortiSIEM VHDX you downloaded earlier, click **Next**:

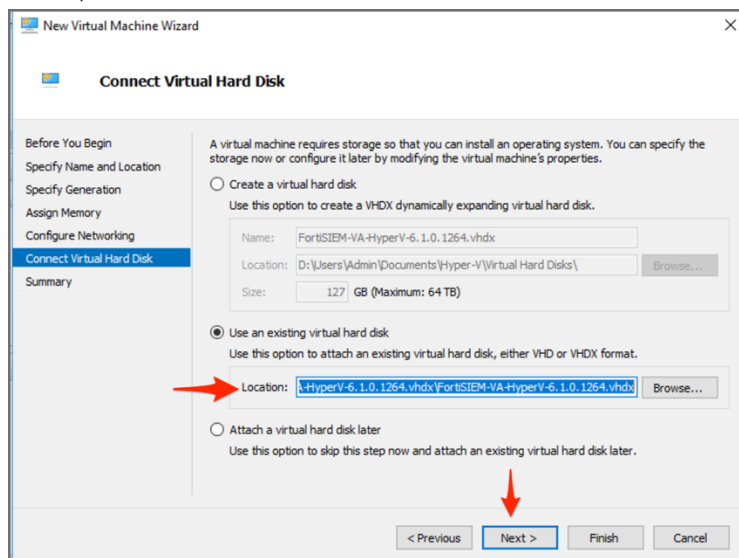


9. In Completing the New Virtual Machine Wizard, click **Finish**, for example:

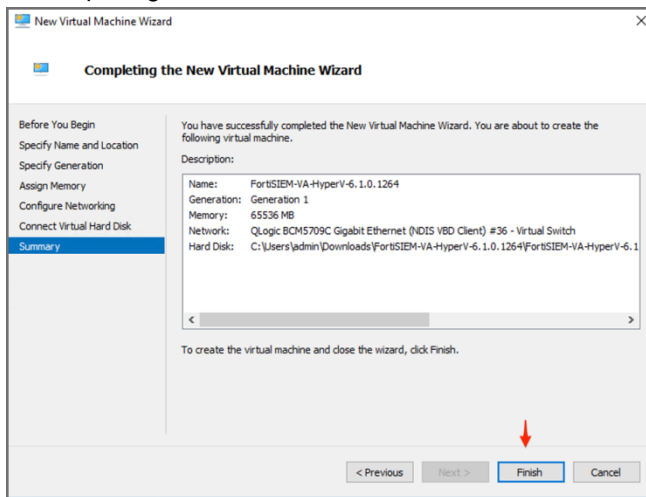


10. In Hyper-V Manager, select the virtual machine that you just created and click **Settings**, for example:

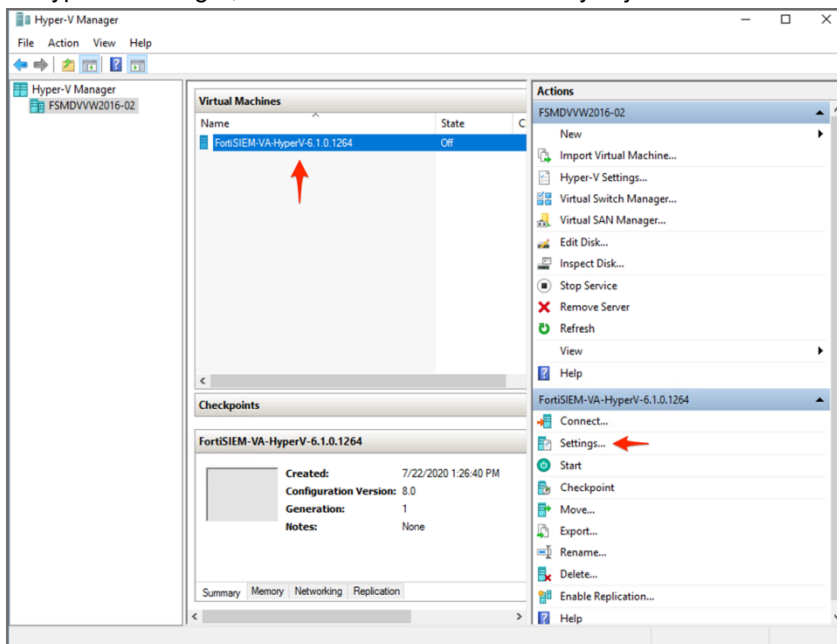


11. In Settings, select the **Processor** line in the navigation panel. Increase the number of virtual processors to **16**.

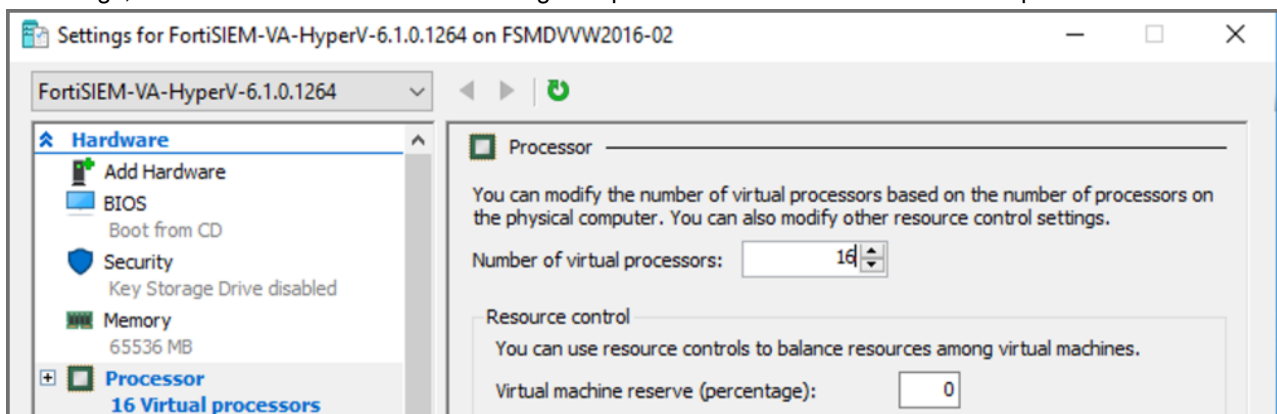

12. Navigate to **IDE Controller 0**, click on **Hard Drive**, then click **Add**, for example:

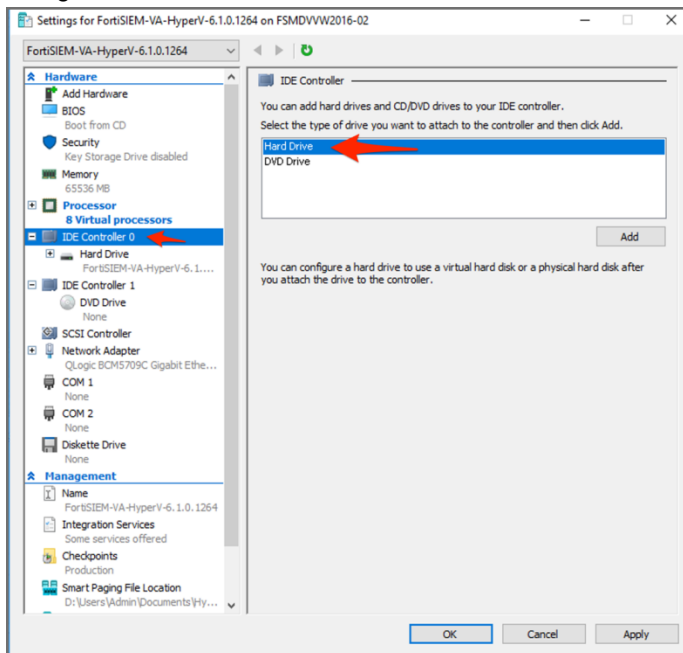

13. Select the Hard Drive you just created, Click **New**.

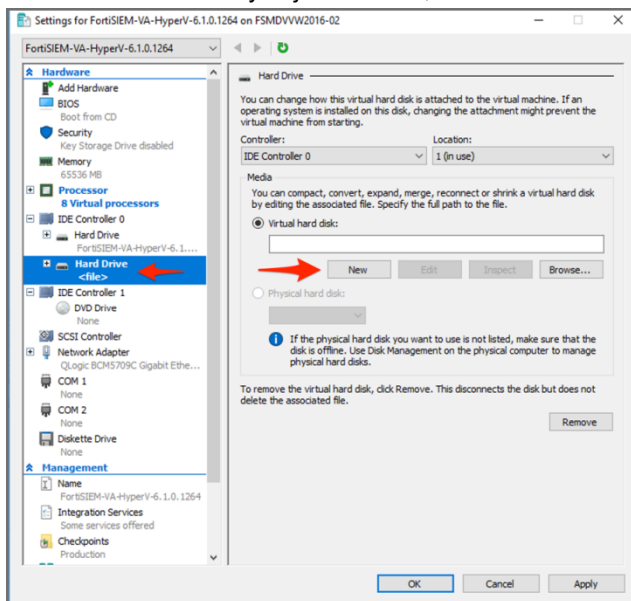

14. Click **Next** on the Before You Begin screen. You will add new hard disks using this method. The following is the list of disks you will need to add:


Disk	Size	Disk Name
Hard Disk 2	100GB	/opt

Disk	Size	Disk Name
		For OPT - 100GB, the 100GB disk for /opt will consist of a single disk that will split into 2 partitions, /OPT and swap. The partitions will be created and managed by FortiSIEM when <code>configFSM.sh</code> runs.
Hard Disk 3	60GB	/svn
Hard Disk 4	60GB	/cmdb
Hard Disk 5	60GB+	/data (see the following note)


The **60GB CMDDB disk** and **60GB SVN disk** should be assigned to **IDE Controller 1**.

Note on Hard Disk 5:


- Add the 5th disk only if using EventDB on local storage or ClickHouse. In all other cases, this disk is not required. ClickHouse is recommended for most deployments. Please see [ClickHouse Reference Architecture](#) for more information.
- For EventDB on local disk, choose a disk based on your EPS and event retention policy. See [EventDB Sizing Guide](#) for guidance. 60GB is the minimum.
- For ClickHouse, choose disks based on the number of Tiers and disks on each Tier. These depend on your EPS and event retention policy. See [ClickHouse Sizing Guide](#) for guidance. For example, you can choose 1 large disk for Hot Tier. Or you can choose 2 Tiers - Hot Tier comprised of one or more SSD disks and Warm Tier comprised of one or more magnetic hard disks.

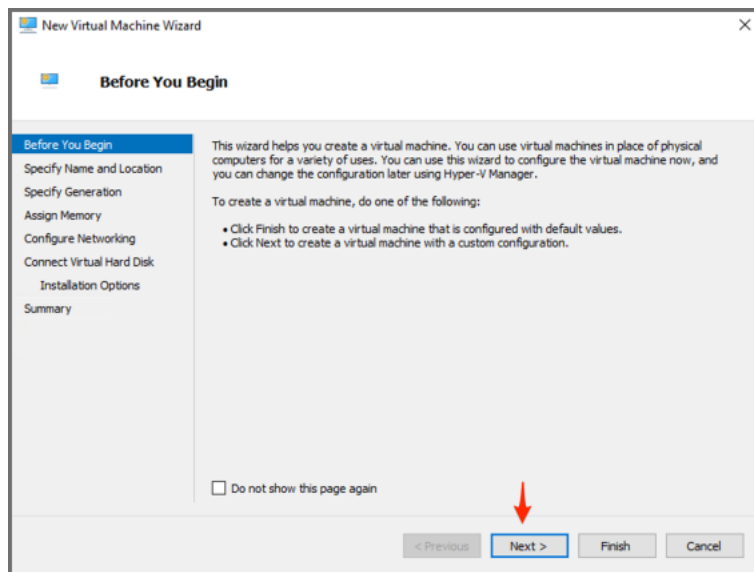


15. Choose a disk format (VHDX) and click **Next**.

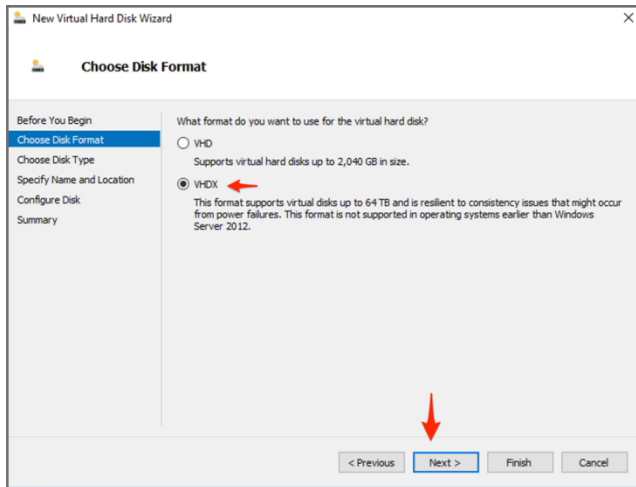


16. Choose Disk Type (**Dynamically expanding**) and click **Next**.

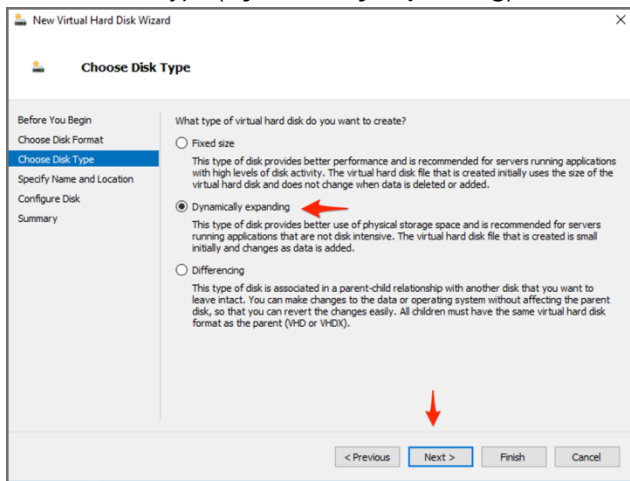


17. Specify the **Name** and **Location** of the disk. Click **Next**.

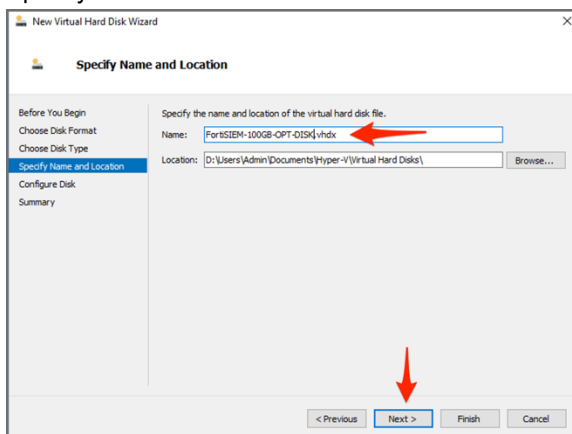


18. Specify 100GB as the size of the disk (for /opt). For other disks, specify size accordingly. Click **Next**.

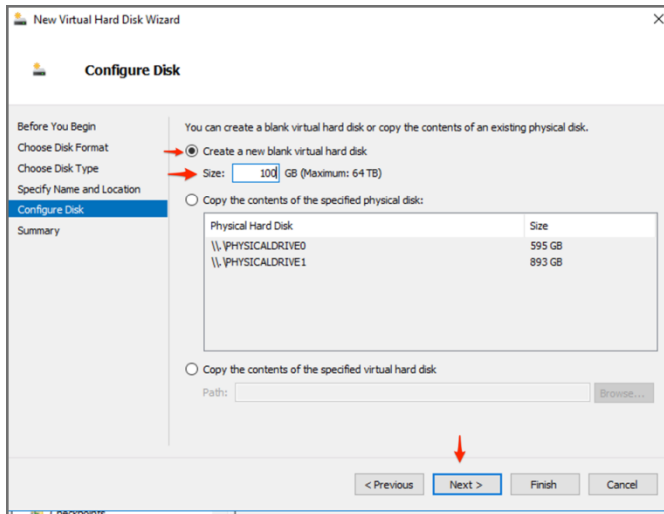

19. Click **Finish**.

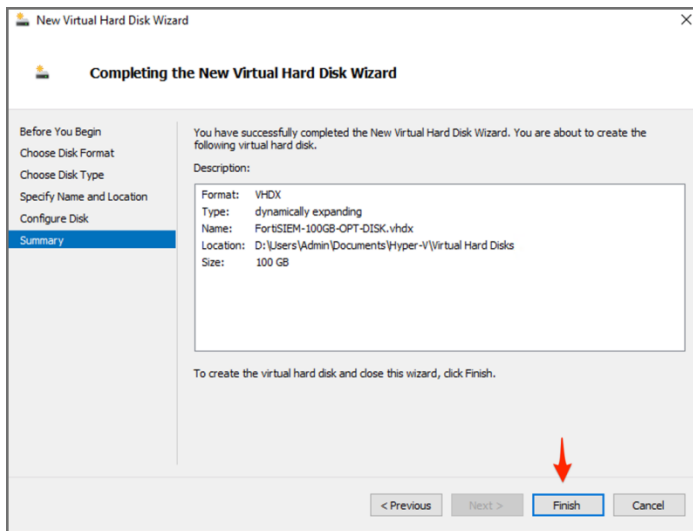


20. **IMPORTANT:** Similarly, add a 60GB CMDB disk, a 60GB SVN disk to **IDE Controller 1**. Delete the CD Drive that was added by default. If you need to use local data disk, then add a Hard Disk on the SCSI Controller of the appropriate size. Once all this is done, click **OK**.

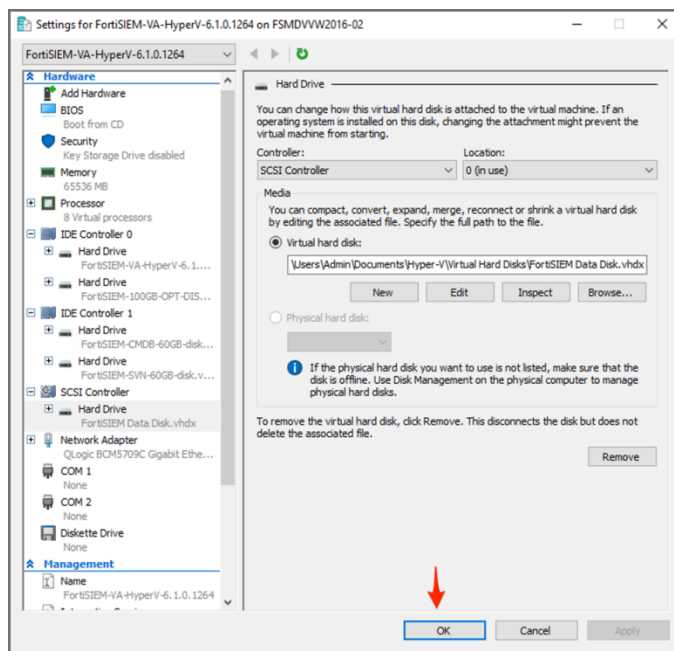


Start FortiSIEM from Hyper-V Manager

1. In Hyper-V Manager, select the Supervisor, Worker, or Collector virtual machine.
2. Click **Connect**.

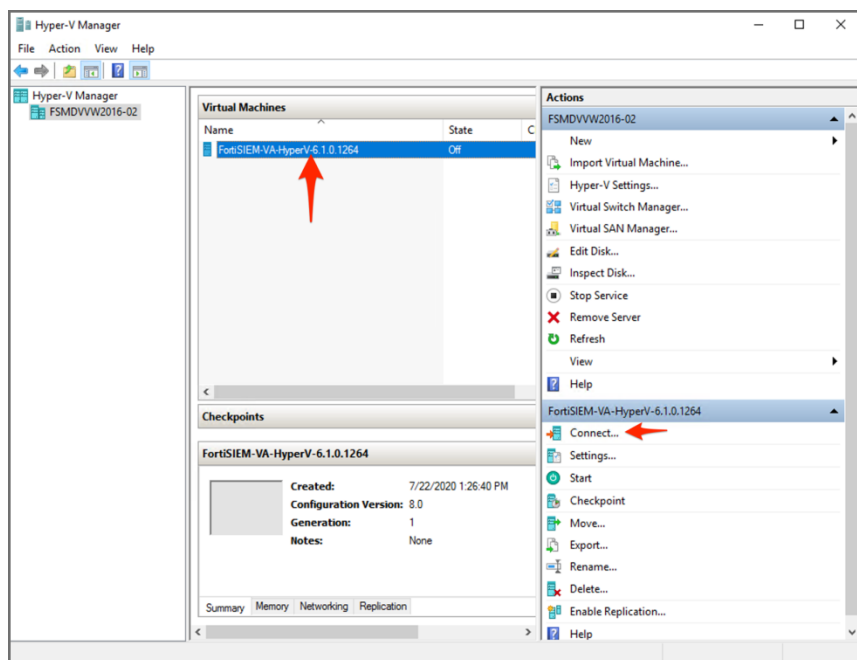

3. Click the **Power On Icon** as illustrated.

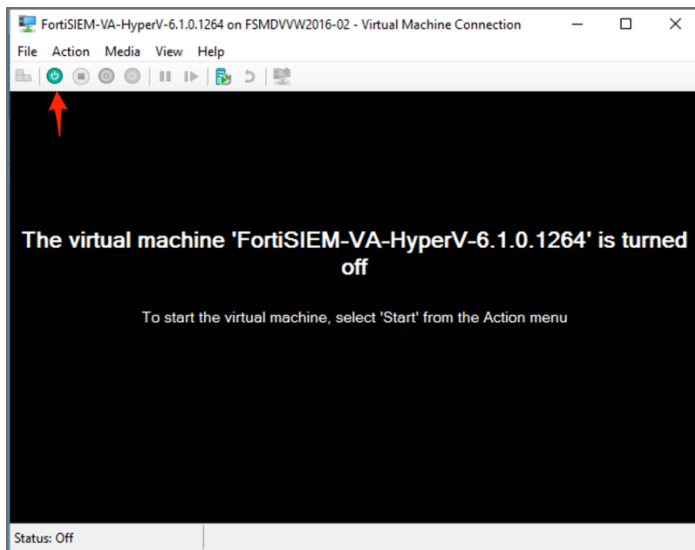

4. The system will boot up. When the command prompt window opens, log in with the default login credentials: User `root` and Password `ProspectHills`.
5. You will be required to change the password. Remember this password for future use.

At this point, you can continue configuring FortiSIEM by [using the GUI](#).


Configure FortiSIEM




At no stage of the installation process is it required that users manually format the disks. FortiSIEM will provision the file system on disks as needed.

Follow these steps to configure FortiSIEM by using a simple GUI.

1. Log in as user `root` with the password you set in **Start FortiSIEM from Hyper-V Manager** Step 5 above.
2. At the command prompt, go to `/usr/local/bin` and enter `configFSM.sh`, for example:
`# configFSM.sh`
3. In VM console, select **1 Set Timezone** and then press **Next**.

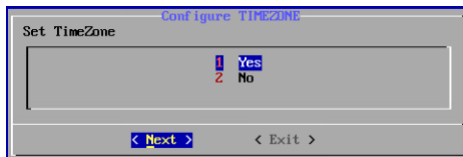


4. Select your **Region**, and press **Next**.




5. Select your **Country**, and press **Next**.



6. Select the **Country** and **City** for your timezone, and press **Next**.



7. If installing a Supervisor, select **1 Supervisor**. Press **Next**.
 If installing a Worker, select **2 Worker**, and press **Next**.
 If installing a Collector, select **3 Collector**, and press **Next**.
 If installing for automated High Availability, select **4 PostgreSQL Database**, and press **Next**.
 If installing FortiSIEM Manager, select **5 FortiSIEM Manager**, and press **Next**.
 If installing FortiSIEM Supervisor without DB (Follower), select **6 Supervisor without DB** and press **Next**.
Note: The appliance type cannot be changed once it is deployed, so ensure you have selected the correct option.

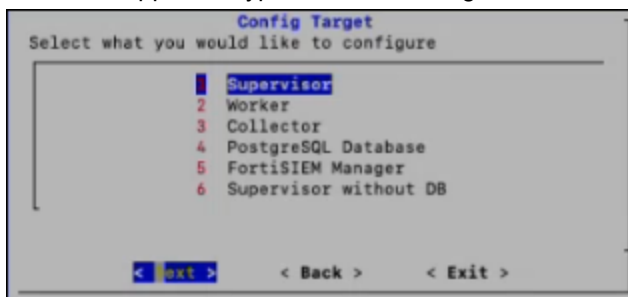



Regardless of whether you select **FortiSIEM Manager**, **Supervisor**, **Supervisor without DB**, **Worker**, or **Collector**, you will see the same series of screens with only the header changed to reflect your target installation, unless noted otherwise.

A dedicated ClickHouse Keeper uses a Worker, so first install a Worker and then in later steps configure the Worker as a ClickHouse Keeper.

8. If you want to enable FIPS, then choose **2**. Otherwise, choose **1**. You have the option of enabling FIPS (option **3**) or disabling FIPS (option **4**) later.

Note: After Installation, a 5th option to change your network configuration (**5 change_network_config**) is available. This allows you to change your network settings and/or host name.




9. Select the disk for opt and press **Next**.

Note: This option only appears if **Supervisor**, **Worker** or **Collector** is selected as **Config Target**.




10. Select the disk for cmdb and press **Next**.

Note: This option only appears if **Supervisor** is selected as **Config Target**.

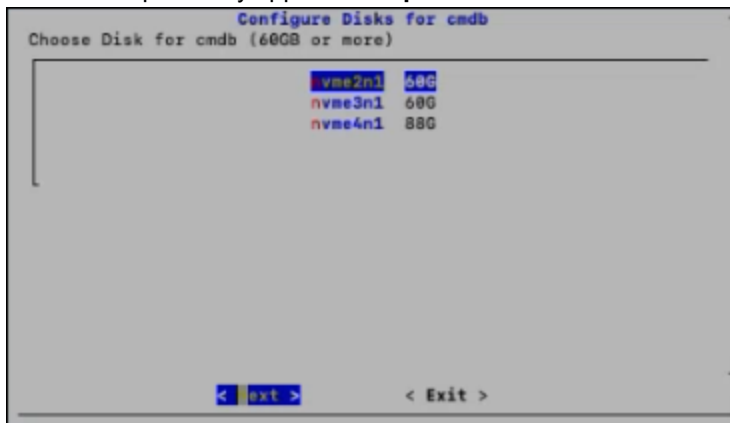


11. Confirm the disk for svn and press **Next**.

Note: This option only appears if **Supervisor** is selected as **Config Target**.

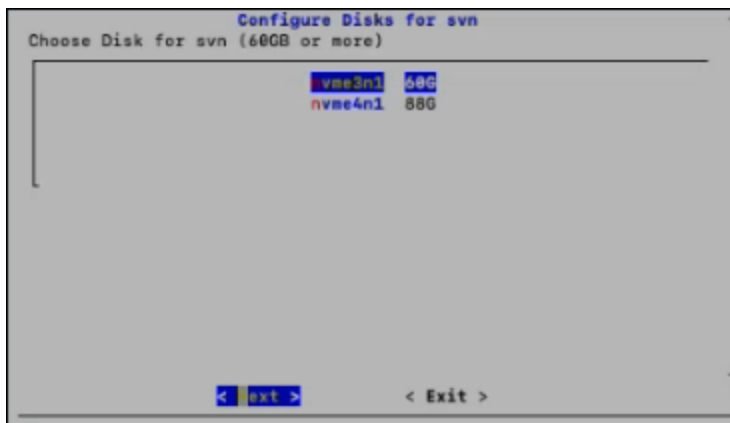


12. Confirm the selected disks (opt, cmdb, svn) for **Supervisor**, opt for **Worker** and **Collector**, and press **Next**, or press **Back** as needed to re-configure.

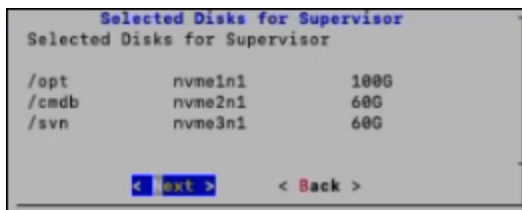


13. Select the **Network Interface** you wish to use, and press **Next**.

Note: If a bond interface is configured, it will appear in the **Select Network Interface** window.

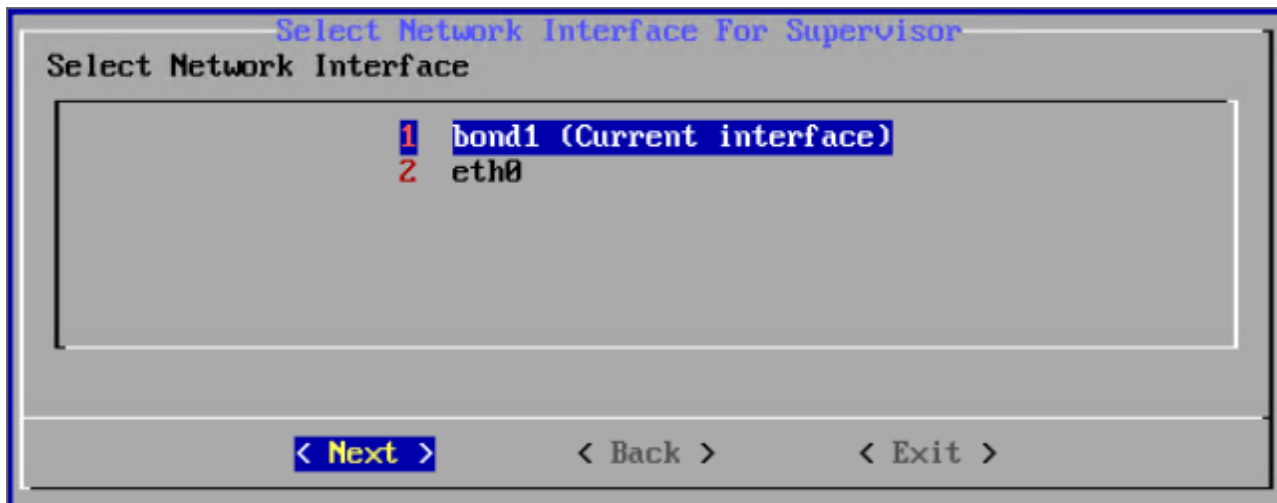

14. Determine whether your network supports IPv4-only, IPv6-only, or both IPv4 and IPv6 (Dual Stack). Choose **1** for IPv4-only, choose **2** for IPv6-only, or choose **3** for both IPv4 and IPv6.

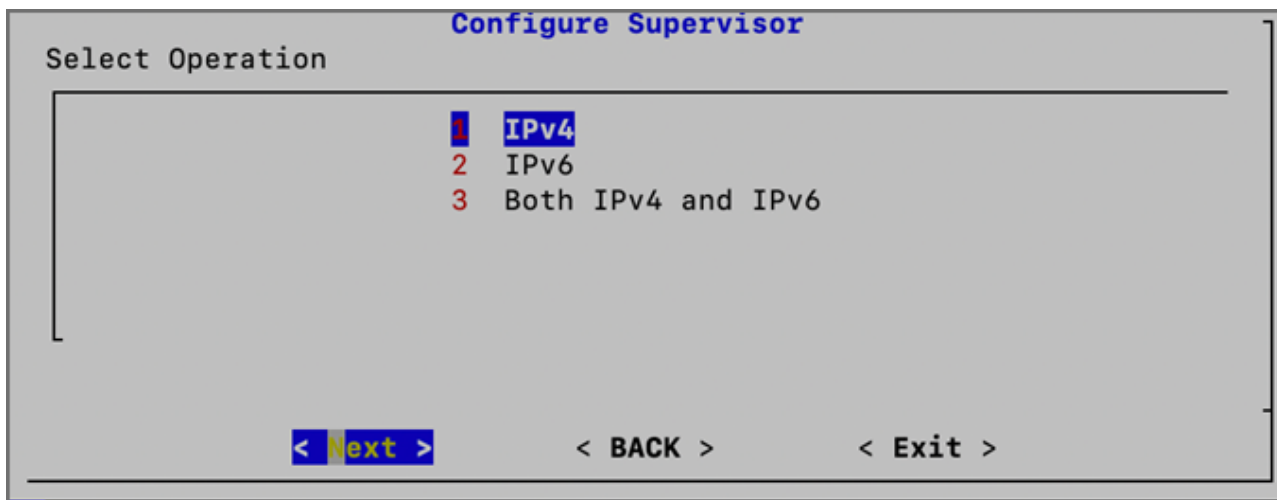

15. If you choose **1** (IPv4) or choose **3** (Both IPv4 and IPv6), and press **Next**, then you will move to step 16. If you choose **2** (IPv6), and press **Next**, then skip to step 17.
16. Configure the network by entering the following fields. Press **Next**.

Option	Description
IPv4 Address	The Manager/Supervisor/Worker/Collector's IPv4 address
NetMask	The Manager/Supervisor/Worker/Collector's subnet
Gateway	Network gateway address
DNS1, DNS2	Addresses of the DNS servers

Configure IPv4 For Supervisor

Configure IPv4 Network

IPv4 Address: 172.30.56.103
 Netmask: 255.255.252.0
 Gateway: 172.30.56.1
 DNS1: 172.30.1.105
 DNS2:

< **Next** > < **Back** > < **Exit** >

17. If you chose **1** in step 14, then you will need to skip to step 18. If you chose **2** or **3** in step 14, then you will configure the IPv6 network by entering the following fields, then press **Next**.

Option	Description
IPv6 Address	The Manager/Supervisor/Worker/Collector's IPv6 address
prefix (Netmask)	The Manager/Supervisor/Worker/Collector's IPv6 prefix
Gateway ipv6	IPv6 Network gateway address
DNS1 IPv6, DNS2 IPv6	Addresses of the IPv6 DNS server 1 and DNS server2

Configure IPv6 for Supervisor

Configure IPv6 Network

IPv6 Address: 2001:815a:1:1::ac1e:2050
 prefix (Netmask): 64
 Gateway ipv6: 2001:815a:1:1::ac1e:3820
 DNS1 IPv6: 2001:815a:1:1::ac1e:1007
 DNS2 IPv6:


< **Next** > < **Back** > < **Exit** >

Note: If you chose option **3** in step 14 for both IPv4 and IPv6, then even if you configure 2 DNS servers for IPv4 and IPv6, the system will only use the first DNS server from IPv4 and the first DNS server from the IPv6 configuration.

Note: In many dual stack networks, IPv4 DNS server(s) can resolve names to both IPv4 and IPv6. In such

environments, if you do not have an IPv6 DNS server, then you can use public IPv6 DNS servers or use IPv4-mapped IPv6 address.

18. Configure Hostname for FortiSIEM Manager/Supervisor/Worker/Collector. Press **Next**.

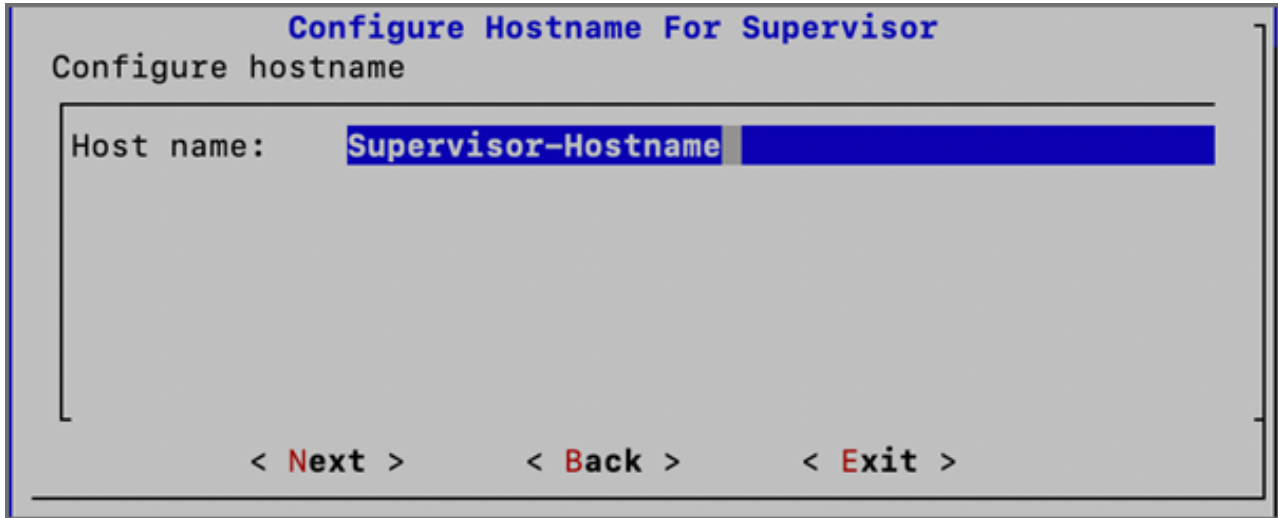


19. Test network connectivity by entering a host name that can be resolved by your DNS Server (entered in the previous step) and responds to ping. The host can either be an internal host or a public domain host like google.com. Press **Next**.

Note: By default, "google.com" is shown for the connectivity test, but if configuring IPv6, you must enter an accessible internally approved IPv6 DNS server, for example: "ipv6-dns.fortinet.com"

Note: When configuring both IPv4 and IPv6, only testing connectivity for the IPv6 DNS is required because the IPV6 takes higher precedence. So update the host field with an approved IPv6 DNS server.



20. The final configuration confirmation is displayed. Verify that the parameters are correct. If they are not, then press **Back** to return to previous dialog boxes to correct any errors. If everything is OK, then press **Run**.

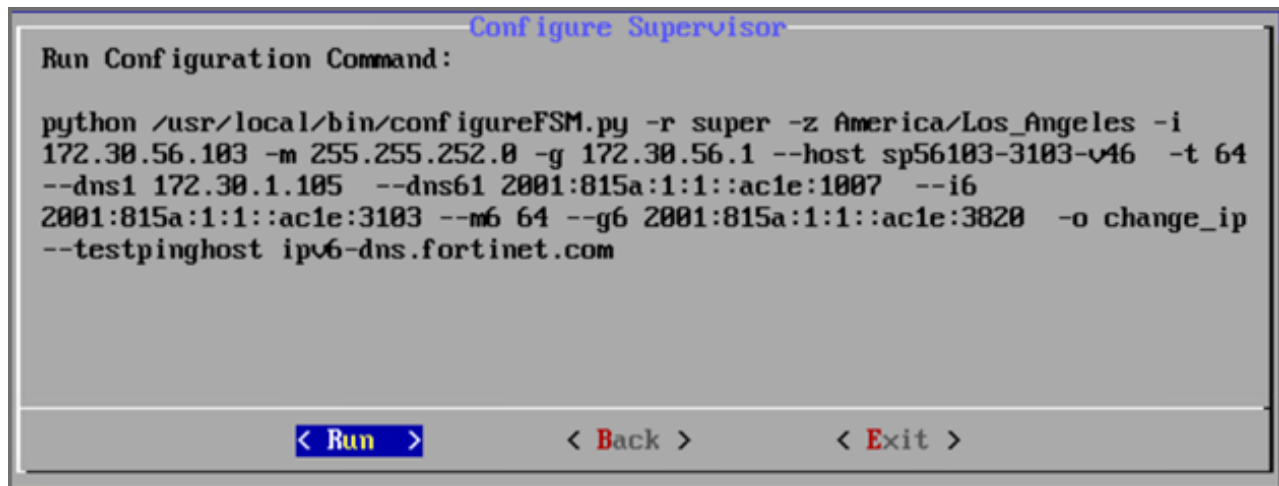

The options are described in the following table.

Option	Description
-r	The FortiSIEM component being configured
-z	The time zone being configured
-i	IPv4-formatted address
-m	Address of the subnet mask
-g	Address of the gateway server used
--host	Host name
-t	The IP type. The values can be either 4 (for ipv4) or 6 (for v6) or 64 (for both ipv4 and ipv6). .
--dns1, --dns2	Addresses of the DNS servers
--i6	IPv6-formatted address
--m6	IPv6 prefix
--g6	IPv6 gateway
-o	Installation option (install_without_fips , install_with_fips , enable_fips , disable_fips , change_network_config *) *Option only available after installation.)
--testpinghost	The URL used to test connectivity

21. It will take some time for this process to finish. When it is done, proceed to [Upload the FortiSIEM License](#). If the VM fails, you can inspect the `ansible.log` file located at `/usr/local/fresh-install/logs` to try and identify the problem.

Upload the FortiSIEM License



Before proceeding, make sure that you have obtained valid FortiSIEM license from Forticare. For more information, see the [Licensing Guide](#).


You will now be asked to input a license.

1. Open a Web browser and log in to the FortiSIEM UI. Use link `https://<supervisor-ip>` to login. Please note that if you are logging into FortiSIEM with an IPv6 address, you should input `https://[IPv6 address]` on the browser tab.
2. The License Upload dialog box will open.

3. Click **Browse** and upload the license file.
Make sure that the **Hardware ID** shown in the License Upload page matches the license.
4. For **User ID** and **Password**, choose any **Full Admin** credentials.
For the first time installation, enter `admin` as the user and `admin*1` as the password. You will then be asked to create a new password for GUI access.
5. Choose **License type** as **Enterprise** or **Service Provider**.
This option is available only for a first time installation. Once the database is configured, this option will not be available.
For FortiSIEM Manager, **License Type** is not an available option, and will not appear. At this point, FortiSIEM Manager installation is complete. You will not be taken the Event Database Storage page, so you can skip **Configure an Event Database**.
Note: The FortiSIEM Manager license allows a certain number of instances that can be registered to FortiSIEM Manager.
6. Proceed to [Configure an Event Database](#).

Configure an Event Database

Choose the event database.

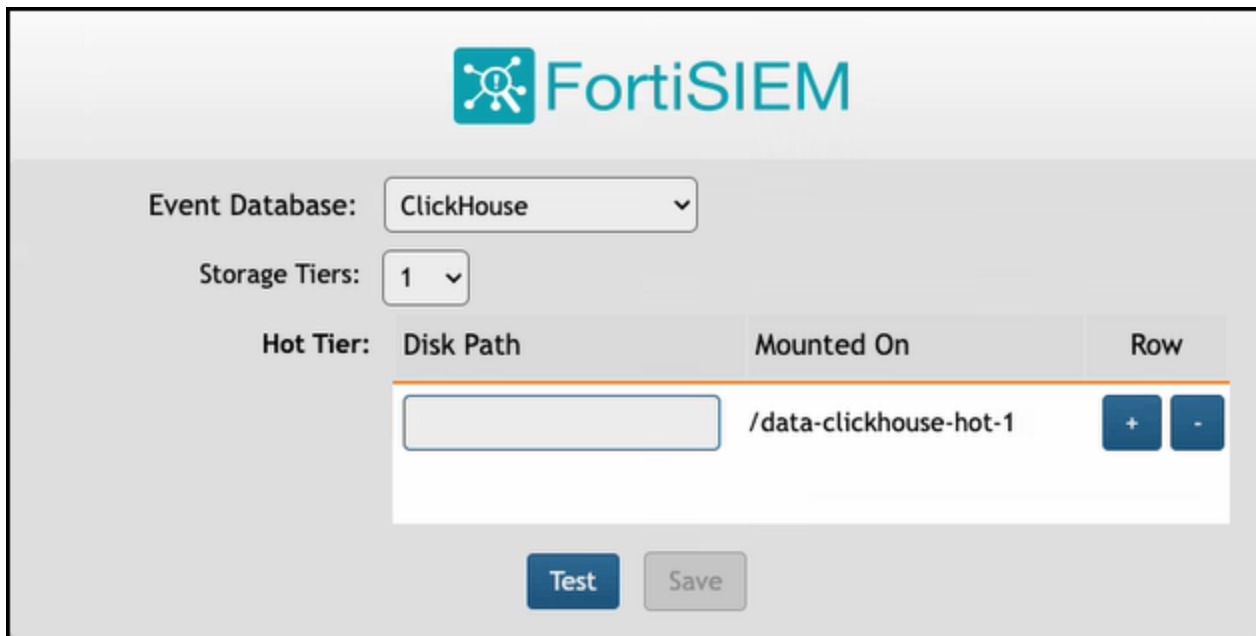

The screenshot shows the FortiSIEM configuration interface. At the top is the FortiSIEM logo. Below it, the 'Event Database' is set to 'ClickHouse'. The 'Storage Tiers' are set to '1'. Under 'Hot Tier', there is a table with columns 'Disk Path', 'Mounted On', and 'Row'. The first row shows an empty 'Disk Path' field, the path '/data-clickhouse-hot-1' in the 'Mounted On' column, and '+' and '-' buttons in the 'Row' column. At the bottom are 'Test' and 'Save' buttons.

Hot Tier:	Disk Path	Mounted On	Row
		/data-clickhouse-hot-1	+ -

If the Event Database is one of the following options, additional disk configuration is required.

- **ClickHouse:** See [Configuring ClickHouse Storage](#).
Recommended for most deployments. Please see [ClickHouse Reference Architecture](#) for more information.
- **EventDB on Local Disk:** See [Configuring EventDB Storage](#).

Final Check

FortiSIEM installation is complete. If the installation is successful, the VM will reboot automatically. Otherwise, the VM will stop at the failed task.

You can inspect the `ansible.log` file located at `/usr/local/fresh-install/logs` if you encounter any issues during FortiSIEM installation.

After installation completes, ensure that the `phMonitor` is up and running, for example:

```
# phstatus
```

For the Supervisor, Supervisor without DB (Follower), Worker and Collector, the response should be similar to the following.

```
Every 1.0s: /opt/phoenix/bin/phstatus.py

System uptime: 21:12:02 up 1:11, 1 user, load average: 0.16, 0.20, 0.36
Tasks: 27 total, 0 running, 26 sleeping, 0 stopped, 0 zombie
Cpu(s): 16 cores, 6.2%us, 2.1%sy, 0.0%ni, 91.4%id, 0.6%wa, 0.2%hi, 0.1%si, 0.0%st
Mem: 65702100k total, 10366036k used, 55336064k free, 4352k buffers
Swap: 2621436k total, 0k used, 2621436k free, 2465020k cached
```

PROCESS	UPTIME	CPU%	VIRT_MEM	RES_MEM
phParser	41:23	0	2176m	550m
phQueryMaster	41:41	0	1020m	77m
phAlertMaster	41:41	0	1079m	504m
phAlertWorker	41:41	0	1363m	205m
phQueryWorker	41:41	0	1383m	279m
phDataManager	41:41	0	1419m	205m
phDiscover	41:41	0	513m	53m
phReportWorker	41:41	0	1433m	95m
phReportMaster	41:41	0	600m	67m
phIdentityWorker	41:41	0	1027m	50m
phIdentityMaster	41:41	0	491m	39m
phAgentManager	41:41	0	1425m	54m
phCheckpoint	42:31	0	325m	39m
phEventManager	41:41	0	702m	70m
phReportLoader	41:41	0	769m	270m
phBeaconEventPackager	41:41	0	1125m	65m
phDataPurger	41:41	0	508m	50m
phEventForwarder	41:41	0	540m	46m
phMonitor	37:24	0	2000m	53m
Apache	01:10:40	0	310m	16m
Node.js-charting	01:10:19	0	916m	71m
Node.js-pm2	01:10:13	0	0	26m
AppSvc	01:10:07	0	15172m	3026m
DBSvc	01:10:30	0	317m	30m
phAnomaly	01:00:07	0	907m	64m
phFortiInsightAI	01:10:40	0	23432m	430m
Redis	01:10:10	0	55m	25m

For FortiSIEM Manager, the response should look similar to the following.

```
Every 1.0s: /opt/phoenix/bin/phstatus.py

System uptime: 11:34:52 up 1 day, 1:39, 2 users, load average: 0.00, 0.00, 0.92
Tasks: 5 total, 0 running, 5 sleeping, 0 stopped, 0 zombie
Cpu(s): 8 cores, 7.2%us, 0.2%sy, 0.0%ni, 92.3%id, 0.0%wa, 0.1%hi, 0.1%si, 0.0%st
Mem: 24468724k total, 6696192k used, 16212508k free, 5248k buffers
Swap: 26058744k total, 0k used, 26058744k free, 2352072k cached
```

PROCESS	UPTIME	CPU%	VIRT_MEM	RES_MEM
phMonitor	20:57:20	0	1130m	64m
Apache	1-01:20:00	0	305m	16m
Rsyslogd	1-01:38:42	0	192m	7380k
AppSvc	1-01:38:34	5	11153m	4182m
DBSvc	1-01:38:43	0	425m	39m

Cluster Installation

For larger installations, you can choose Worker nodes, Collector nodes, and external storage (NFS, ClickHouse, or Elasticsearch).


- [Install Supervisor](#)
- [Install Workers](#)
- [Register Workers](#)
- [Create ClickHouse Topology \(Optional\)](#)

- [Install Collectors](#)
- [Register Collectors](#)
- [Install Manager](#)
- [Register Instances to Manager](#)

Install Supervisor

Follow the steps in [All-in-one Installation](#), except with the following differences.

1. Event Database choices are **EventDB on NFS**, **ClickHouse**, or **Elasticsearch**.
2. If you choose **EventDB on NFS**
 - a. Disk 5 is not required (From [Create FortiSIEM VM in Hyper-V Step 14](#)).
 - b. You need to configure NFS after license upload.

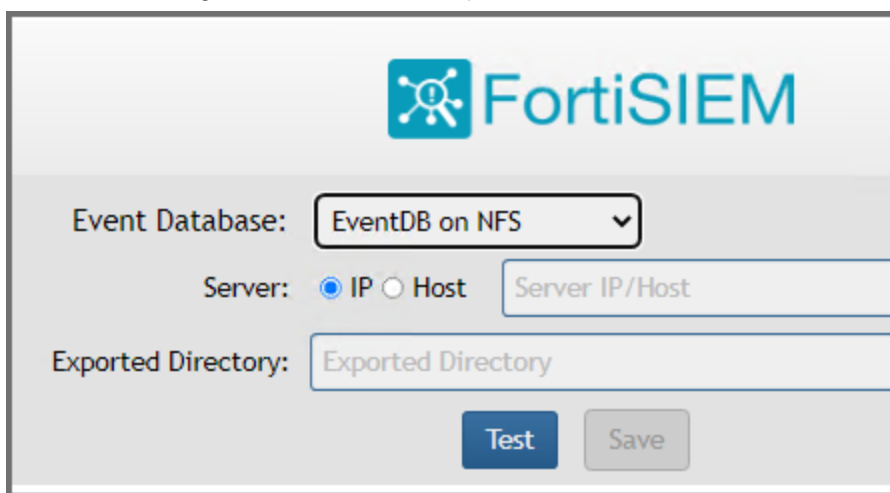

The screenshot shows the FortiSIEM configuration interface. At the top is the FortiSIEM logo. Below it, the 'Event Database' is set to 'EventDB on NFS' in a dropdown menu. Under 'Server', the 'IP' radio button is selected, and the 'Server IP/Host' field is empty. The 'Exported Directory' field is also empty. At the bottom, there are 'Test' and 'Save' buttons.

3. If you choose **ClickHouse**
 - a. You need to create disks during [Create FortiSIEM VM in Hyper-V Step 14](#) based on the role of the Supervisor node in the ClickHouse cluster. See the [ClickHouse Sizing Guide](#) for details.
 - b. You need to configure disks after license upload.



Event Database: ClickHouse ▼

Storage Tiers: 2 ▼

Hot Tier:

Disk Path	Row
	+ -

Warm Tier:

Disk Path	Row
	+ -

4. If you choose **Elasticsearch**, define Elasticsearch endpoints after license upload. See the [Elasticsearch Sizing Guide](#) for details.


FortiSIEM

Event Database: Elasticsearch

ES Service Type: ☒ Native ☐ Amazon ☐ Elastic Cloud

Endpoint:	URL	Ingest	Query	Row
	https://	☒	☒	+ -

REST Port:

User Name:

Password:

Confirm Password:

Shard Allocation: ☐ Fixed ☒ Dynamic

Shards:

Replicas:

Per Org Index ☐

Install Workers

Once the Supervisor is installed, take the same steps in [All-in-one Installation](#) to install a Worker with the following differences.

1. Choose appropriate CPU and memory for the Worker nodes based on Sizing guide.
2. Two hard disks for Operating Systems and FortiSIEM Application:
 - OS – 25GB
 - OPT – 100GB

For OPT - 100GB, the 100GB disk for /opt will consist of a single disk that will split into 2 partitions, /OPT and swap. The partitions will be created and managed by FortiSIEM when `configFSM.sh` runs.

3. If you are running ClickHouse, then create additional data disks based on the role of the Worker in ClickHouse topology. If it is a Keeper node, then a smaller disk is needed. If it is a data node, then a bigger disk is needed based on your EPS and retention policy. See ClickHouse Sizing Guide for details.

Sizing Guide References:

- [ClickHouse Sizing Guide](#)
- [EventDB Sizing Guide](#)
- [Elasticsearch Sizing Guide](#)

Register Workers

Once the Worker is up and running, add the Worker to the Supervisor node.

1. Go to **ADMIN > License > Nodes**.
2. Select Worker from the **Mode** drop-down list and enter the following information:
 - a. In the **Host Name** field, enter the Worker's host name.
 - b. In the **IP Address** field, enter the Worker's IP address.
 - c. If you are running ClickHouse, then select the number for Storage Tiers from the **Storage Tiers** drop-down list, and input disk paths for disks in each Tier in the **Disk Path** fields.

For **Disk Path**, use one of the following CLI commands to find the disk names.

```
fdisk -l
```

or

```
lsblk
```

When using `lsblk` to find the disk name, please note that the path will be `/dev/<disk>`. As an example, `/dev/vdc`.

- d. Click **Test**.

Add Node
✕

Mode: Worker ▼

Host Name:

IP Address:

Running On: VM ▼

Storage Tiers: 2 ▼

Hot Tier:

Disk Path	Mounted On	Row
	/data-clickhouse-hot-1	+ −

Disk Path	Mounted On	Row
	/data-clickhouse-warm-1	+ −

Test
Save
Cancel

e. If the test succeeds, then click **Save**.

- See **ADMIN > Health > Cloud Health** to ensure that the Workers are up, healthy, and properly added to the system.

FortiSIEM Admin - Cloud Health

Summary: 2 Total, 0 No Connection, 0 Critical, 0 Warning, 2 Normal

Name	IP Address	Type	HA Role	DR Role	Health	Last Status Updated
AutomationServer		Supervisor With DB			Normal	Dec 11, 2024, 06:24:20 PM
AutomationWK		Worker			Normal	Dec 11, 2024, 06:24:47 PM

Copyright © 2024 Fortinet, Inc. All rights reserved. Organization: Super User: admin Scope: Global Storage: Elasticsearch FortiSIEM

Create ClickHouse Topology (Optional)

If you are running ClickHouse, you need to configure ClickHouse topology by specifying which nodes belong to ClickHouse Keeper and Data Clusters. Follow the steps in [Configuring ClickHouse Topology](#).

Install Collectors

Once Supervisor and Workers are installed, follow the same steps in [All-in-one Install](#) to install a Collector except you need to only choose OS and OPT disks. The recommended settings for Collector node are:

- CPU = 4
- Memory = 8GB
- Two hard disks:
 - OS – 25GB
 - OPT – 100GB

For OPT - 100GB, the 100GB disk for /opt will consist of a single disk that will split into 2 partitions, /OPT and swap. The partitions will be created and managed by FortiSIEM when `configFSM.sh` runs.

Register Collectors

Collectors can be deployed in Enterprise or Service Provider environments.

- [Enterprise Deployments](#)
- [Service Provider Deployments](#)

Enterprise Deployments

For Enterprise deployments, follow these steps.

1. Log in to Supervisor with 'Admin' privileges.
2. Go to **ADMIN > Settings > System > Cluster Config**.
 - a. Under **Event Upload Workers**, enter the IP of the Worker node. If a Supervisor node is only used, then enter the IP of the Supervisor node. Multiple IP addresses can be entered on separate lines. In this case, the Collectors will load balance the upload of events to the listed Event Workers.
Note: Rather than using IP addresses, a DNS name is recommended. The reasoning is, should the IP addressing change, it becomes a matter of updating the DNS rather than modifying the Event Worker IP addresses in FortiSIEM.
 - b. Click **Save**.
3. Go to **ADMIN > Setup > Collectors** and add a Collector by entering:
 - a. **Name** – Collector Name
 - b. **Guaranteed EPS** – this is the EPS that Collector will always be able to send. It could send more if there is excess EPS available.
 - c. **Start Time** and **End Time** – set to **Unlimited**.
4. SSH to the Collector and run following script to register Collectors:


```
phProvisionCollector --add <user> '<password>' <Super IP or Host> <Organization>
<CollectorName>
```

The password should be enclosed in single quotes to ensure that any non-alphanumeric characters are escaped.

 - a. Set `user` and `password` using the admin user name and password for the Supervisor.
 - b. Set `Super IP or Host` as the Supervisor's IP address.
 - c. Set `Organization`. For Enterprise deployments, the default name is Super.
 - d. Set `CollectorName` from [Step 3a](#).
 The Collector will reboot during the Registration.

5. Go to **ADMIN > Health > Collector Health** for the status.

FortiSIEM Admin - Collector Health

Summary: 1 Total, 0 No Connection, 0 Critical, 0 Warning, 1 Normal

Organization	Collector ID	Collector Name	IP Address	Health	Last Status Updated	Last File Received	Collector Type
org1	10000	co1		Normal	Dec 11, 2024, 06:16:35 PM	Dec 11, 2024, 06:15:58 ...	VM

Copyright © 2024 Fortinet, Inc. All rights reserved. Organization: Super User: admin Scope: Global Storage: Elasticsearch FortiSIEM

Service Provider Deployments

For Service Provider deployments, follow these steps.

1. Log in to Supervisor with 'Admin' privileges.
2. Go to **ADMIN > Settings > System > Cluster Config**.
 - a. Under **Event Upload Workers**, enter the IP of the Worker node. If a Supervisor node is only used, then enter the IP of the Supervisor node. Multiple IP addresses can be entered on separate lines. In this case, the Collectors will load balance the upload of events to the listed Event Workers.
Note: Rather than using IP addresses, a DNS name is recommended. The reasoning is, should the IP addressing change, it becomes a matter of updating the DNS rather than modifying the Event Worker IP addresses in FortiSIEM.
 - b. Click **Save**.

FortiSIEM Admin - Cluster Config

Supervisors

Address: [Dropdown] [Save]

Event Upload Workers

Address: [Dropdown] [Save]

3. Go to **ADMIN > Setup > Organizations** and click **New** to add an Organization.

Organization Definition (org2 ID: 2000) ✕

Organization: org2	Include IP/IP Range:
Full Name:	Exclude IP/IP Range:
Admin User: admin	Agent User:
Admin Password: Cannot be changed	Agent Password:
Confirm Admin Password: Cannot be changed	Confirm Agent Password:
Admin Email: admin@fortinet.com	Max Devices: 0
Phone:	Address:
Account Number:	Account Type:
Support Tier:	Account Status:
Support Team:	Account Manager:

Collectors: Lines: 1

Collector ID	Collector Name	Collector EPS	UpLoad Rate Limit	UpLoad EPS Lin
Save Cancel				

4. Enter the **Organization Name**, **Admin User**, **Admin Password**, and **Admin Email**.
5. Under **Collectors**, click **New**.
6. Enter the **Collector Name**, **Guaranteed EPS**, **Start Time**, and **End Time**.
 The last two values could be set as **Unlimited**. **Guaranteed EPS** is the EPS that the Collector will always be able to send. It could send more if there is excess EPS available.

Organization Definition (org2 ID: 2000) - Add Collector

Name: Required

Guaranteed EPS: Required

Upload Rate Limit (Kbps): Unlimited

Upload EPS Limit: Unlimited

Start Time: ☒ Unlimited

End Time: ☒ Unlimited

Event Worker: Optional + -

< Save < Cancel

7. SSH to the Collector and run following script to register Collectors:

```
phProvisionCollector --add <user> '<password>' <Super IP or Host> <Organization>
<CollectorName>
```


The password should be enclosed in single quotes to ensure that any non-alphanumeric characters are escaped.

- Set `user` and `password` using the admin User Name and password for the Organization that the Collector is going to be registered to.
- Set `Super IP or Host` as the Supervisor's IP address.
- Set `Organization` as the name of an organization created on the Supervisor.
- Set `CollectorName` from [Step 6](#).

```
root@ec574 ~# phProvisionCollector
Usage: phProvisionCollector --add <Organization-user-name> <Organization-user-password> <Supervisor-IP> <Organization-name> <Collector-name>
root@ec574 ~# phProvisionCollector --add admin Admin@11 172.30.57.2 ORG CO-ORG
Continuing to provision the Collector
This collector is registered successfully. Normal Exit and restart of phMonitor after collector license registration.
root@ec574 ~# _
```

The Collector will reboot during the Registration.

8. Go to **ADMIN > Health > Collector Health** and check the status.

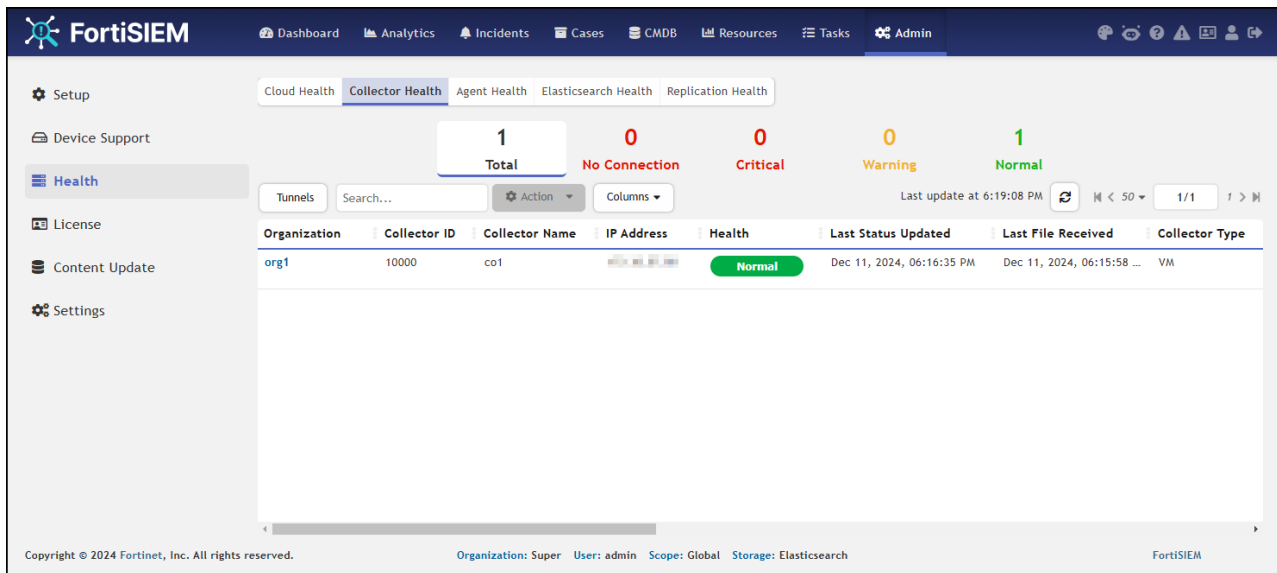

Install Manager

Starting with release 6.5.0, you can install FortiSIEM Manager to monitor and manage multiple FortiSIEM instances. An instance includes a Supervisor and optionally, Workers and Collectors. The FortiSIEM Manager needs to be installed on a separate Virtual Machine and requires a separate license. FortiSIEM Supervisors must be on 6.5.0 or later versions.

Follow the steps in [All-in-one Install](#) to install Manager. After any Supervisor, Workers, and Collectors are installed, you add the Supervisor instance to Manager, then Register the instance to Manager. See [Register Instances to Manager](#).

Register Instances to Manager

To register your Supervisor instance with Manager, you will need to do two things in the following order.

- First, [add the instance to Manager](#)
- Then [register the instance itself to Manager](#)

Note that Communication between FortiSIEM Manager and instances is via REST APIs over HTTP(S).


Adding Instance to Manager

You can add an instance to Manager by taking the following steps.

Note: Make sure to record the FortiSIEM Instance Name, Admin User and Admin Password, as this is needed when you register your instance.

1. Login to FortiSIEM Manager.
2. Navigate to **ADMIN > Setup**.
3. Click **New**.
4. In the **FortiSIEM Instance** field, enter the name of the Supervisor instance you wish to add.
5. In the **Admin User** field, enter the Account name you wish to use to access Manager.

6. In the **Admin Password** field, enter the Password that will be associated with the Admin User account.
7. In the **Confirm Admin Password** field, re-enter the Password.
8. (Optional) In the **Description** field, enter any information you wish to provide about the instance.
9. Click **Save**.

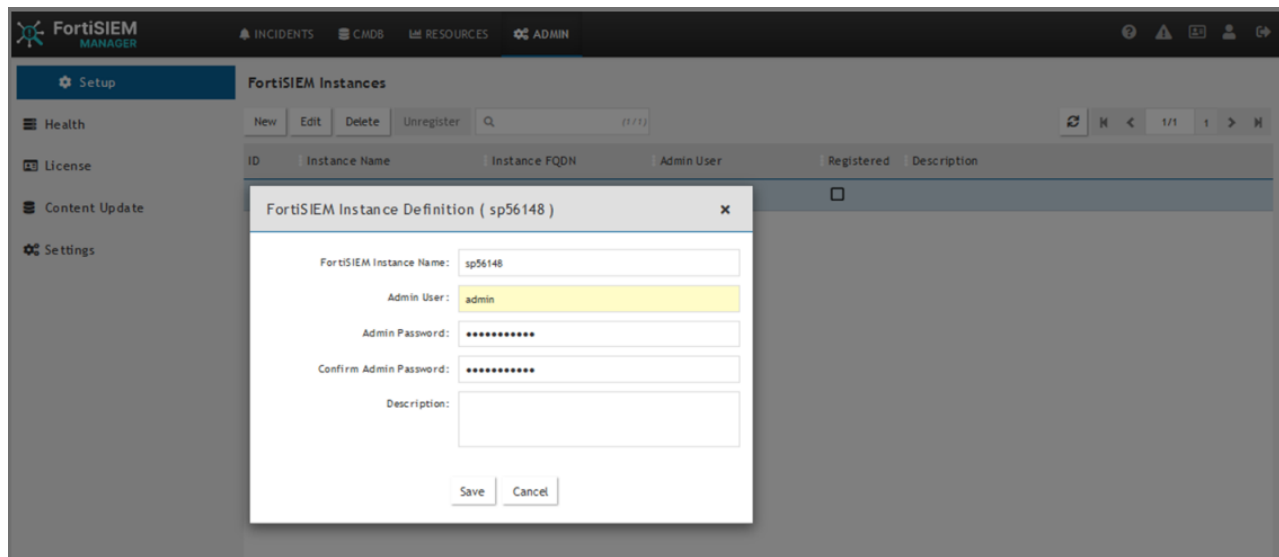


10. Repeat steps 1-9 to add any additional instances to Manager.
Now, follow the instructions in [Register the Instance Itself to Manager](#) for each instance.

Register the Instance Itself to Manager

To register your instance with Manager, take the following steps.

1. From your FortiSIEM Supervisor/Instance, navigate to **ADMIN > Setup > FortiSIEM Manager**, and take the following steps.
 - a. In the **FortiSIEM Manager FQDN/IP** field, enter the FortiSIEM Manager Fully Qualified Domain Name (FQDN) or IP address.
 - b. If the Supervisor is under a Supervisor Cluster environment, in the **FortiSIEM super cluster FQDN/IP** field, enter the Supervisor Cluster Fully Qualified Domain Name (FQDN) or IP address.
 - c. In the **FortiSIEM Instance Name** field, enter the instance name used when adding the instance to Manager.
 - d. In the **Account** field, enter the Admin User name used when adding the instance to Manager.
 - e. In the **Password** field, enter your password to be associated with the Admin User name.
 - f. In the **Confirm Password** field, re-enter your password.
 - g. Click **Test** to verify the configuration.
 - h. Click **Register**.
A dialog box displaying "Registered successfully" should appear if everything is valid.

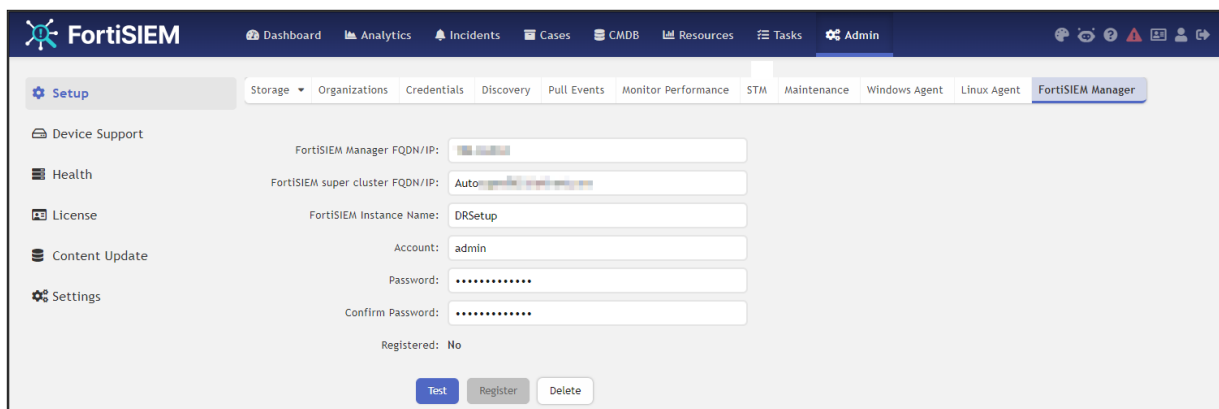

The screenshot shows the FortiSIEM Manager setup interface. The top navigation bar includes 'Dashboard', 'Analytics', 'Incidents', 'Cases', 'CMDB', 'Resources', 'Tasks', and 'Admin'. The 'Admin' tab is active, and the 'FortiSIEM Manager' sub-tab is selected. The left sidebar contains 'Setup', 'Device Support', 'Health', 'License', 'Content Update', and 'Settings'. The main content area has the following fields:

- FortiSIEM Manager FQDN/IP: [text input]
- FortiSIEM super cluster FQDN/IP: Auto [text input]
- FortiSIEM Instance Name: DRSetup [text input]
- Account: admin [text input]
- Password: [password input]
- Confirm Password: [password input]

Below these fields, it says 'Registered: No'. At the bottom, there are three buttons: 'Test' (blue), 'Register' (grey), and 'Delete' (grey).

- i. Login to Manager, and navigate to any one of the following pages to verify registration.
- **ADMIN > Setup** and check that the box is marked in the **Registered** column for your instance.
 - **ADMIN > Health**, look for your instance under FortiSIEM Instances.
 - **ADMIN > License**, look for your instance under FortiSIEM Instances.

Install Log

The install ansible log file is located here: `/usr/local/fresh-install/logs/ansible.log`.

Errors can be found at the end of the file.



www.fortinet.com

Copyright© 2026 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's Chief Legal Officer, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.